




CONTENTS
目 录

产品代号索引
Part No. Index














| 产品代号索引 A Part No. Index | 目录 1—目录 14 |
|-----------------------------------|------------|
| 软管总成 B Hydraulic Hose Assembly | 1—20 |
| 套筒 C Ferrule | 21—27 |
| 软管接头 D Hydraulic Hose Fitting | 28—95 |
| 过渡接头 E Adapter | 96—240 |
| 其它产品 F Other Fitting | 241—246 |
| 附加资料 G Additional Information | 247—262 |

套筒 Ferrele

| | | | |
|---|---|--|---|
| R7树脂管套筒 Ferrele For Two Polyester Braid Hose |  | 国标、部标两层钢丝剥外胶套筒 Ferrule For China 2 Steel Wire Hose |  |
| 一层钢丝剥外胶套筒 Ferrele For GB 3863 1TYPE, DIN 200221ST, SAE 100R1A Hose |  | 国标、部标三层钢丝剥外胶套筒 Ferrule For China 3 Steel Wire Hose |  |
| 两层钢丝剥外胶套筒 Ferrele For GB3863 2 TYPE, DIN 20022 2ST, SAE 100R2A Hose |  | 国标、部标四层钢丝剥外胶套筒 Ferrule For SAE 100R12/20-24, GB 10544 5Type Hose |  |
| 一层钢丝不剥胶套筒 Ferrele For SAE 100R1AT, DIN20022 1SN Hose |  | 四层钢丝剥外胶套筒 Ferrele For GB 10544 3Type/20-32, SAE 100R12/06-16, DIN 20023-4SP, 4SH/10-16 Hose |  |
| 一层钢丝不剥胶套筒 Ferrele For SAE 100R1AT, DIN20022 1SN Hose |  | 四层钢丝剥外胶套筒 Ferrele For DIN 20023-4SH20-32Hose |  |
| 两层钢丝不剥胶套筒 Ferrele For GB 3863 2 TYPE, DIN 20022 2SN ,SAE 100R2AT Hose |  | 多层钢丝剥内外胶套筒 Interlock Ferrule For SAE 100R13/R15, 4SH/12-16Hose |  |
| 两层钢丝不剥胶套筒 Ferrele For SAE R2AT, DIN 20022 2SN HOSE |  | | |
| 国标、部标一层钢丝剥外胶套筒 Ferrule For China 1 Steel Wire Hose |  | | |

软管接头 Hose Fitting

| | | | | | |
|--------------------------------|---|---|---|---|---|
| 一体式软管接头 One Piece Hose Fitting | 公制24° 锥轻系列 Metric Thread 24° cone Light Series |  S10411-RW (P29) |  S20411-TRW (P29) |  S20441-TRW (P30) |  S20491-TRW (P30) |
| | 公制24° 锥重系列 Metric Thread 24° Cone Heavy Series |  S10511-RW (P31) |  S20511-TRW (P31) |  S20541-TRW (P32) |  S20591-TRW (P32) |
| | 英管螺纹60° 锥面密封 BSP Thread 60° Cone Fitting |  S12611A-RW (P33) |  S22611-RW (P33) |  S22641-RW (P34) |  S22691-RW (P34) |
| | 美制JIC螺纹60° 密封 JIC 74° Cone Fitting |  S16711-RW (P35) |  S26711-RW (P36) |  S26741-RW (P36) |  S26791-RW (P37) |
| | 美制ORFS螺纹密封 ORFS Tube Fitting |  S14211-RW (P37) |  S24211-RW S24211-TRW (P38) |  S24241-RW S24241-TRW (P39) |  S24291-RW S24291-TRW (P39) |
| | SAE法兰轻系列 SAE Flange Light Series |  S87311-RW (P40) |  S87341-RW (P40) |  S87391-RW (P41) | |
| | SAE法兰重系列 SAE Flange Heavy Series |  S87611-RW (P41) |  S87641-RW (P42) |  S87691-RW (P42) | |

| | | | | | | | | | | | |
|------------------------------------|---|--|-------------------|--------------------|---------------------|--|--------------------|---------------------|--|--------------------|---------------------|
| 扣压式软管接头 Swaged Hose Fitting | 公制24° 锥轻系列 Metric Thread 24° cone Light Series | | S10411 (P43) | S20411-W (P44) | S20411-T (P44) | | S20441-W (P45) | S20441-T (P45) | | S20491-W (P46) | S20491-T (P46) |
| | 公制24° 锥重系列 Metric Thread 24° Cone Heavy Series | | S10511 (P47) | S20511-W (P47) | S20511-T (P47) | | S20541-W (P48) | S20541-T (P48) | | S20591-W (P49) | S20591-T (P49) |
| | 公制球面密封 Metric Female Multiseal | | S20111 (P50) | S20111-T (P50) | S20141 (P50) | | S20141-T (P50) | S20191 (P51) | | S20191-T (P51) | |
| | 公制平面密封 Metric Female Flat Seat | | S20211 (P51) | S20211-T (P51) | S20241 (P52) | | S20241-T (P52) | S20291 (P52) | | S20291-T (P52) | |
| | 公制螺纹74°锥面密封 Metric Thread 74° Fitting | | S20711 (P53) | S20711-T (P53) | S20741 (P54) | | S20741-T (P54) | S20791 (P55) | | S20791-T (P55) | |
| | 公制卡套式直管 Metric Standpipe | | S50011 (P56) | S50041 (P57) | S50091 (P58) | | | | | | |
| | 英管螺纹 60° 锥面密封 BSP Thread 60° Cone Fitting | | S12611 (P59) | S12611A (P59) | S22611 (P60) | | S22611-T (P60) | S22641 (P61) | | S22641-T (P61) | S22691 (P62) |
| | | | S22691-T (P62) | S22611-OR (P63) | S22611-ORT (P63) | | S22641-OR (P64) | S22641-ORT (P64) | | S22691-OR (P65) | S22691-ORT (P65) |












| | | | | | | | | | | | |
|------------------------------------|--|--|------------------|---------------------|--------------------|-------------------|-----------------|-------------------|--|--|--|
| 扣压式软管接头 Swaged Hose Fitting | 英管螺纹 60° 锥面密封 BSP Thread 60° Cone Fitting | | S22611D (P65) | S22611D-SM (P66) | S22691K (P66) | | | | | | |
| | 英锥管螺纹密封 BSPT Male | | | | | S13011 (P67) | | | | | |
| | 英制球面密封 BSP Female Multiseal | | S22111 (P68) | S22111-T (P68) | S22141 (P69) | S22141-T (P69) | S22191 (P70) | S22191-T (P70) | | | |
| | 日式公制螺纹60° JIS Metric Female 60° Cone Seat | | S28611 (P70) | S28611GM (P71) | S28641 (P71) | S28691 (P72) | | | | | |
| | 日式英管螺纹60° JIS Gas Female 60° Seat JIS B8363 | | S29611 (P72) | S29641 (P73) | S29691 (P73) | | | | | | |
| | 美制锥螺纹密封 NPT Thread Fittings | | S15611 (P74) | S15611SW (P74) | S15691KSW (P75) | | | | | | |
| | 美制ORFS螺纹密封 ORFS Female Flat Seat | | S14211 (P75) | S24211 (P76) | S24211-T (P76) | S24211D (P76) | | | | | |
| | | | S24241 (P77) | S24241-T (P77) | S24291 (P77) | S24291-T (P77) | | | | | |













| | | | |
|-----------------------------|--|--|--|
| 扣压式软管接头 Swaged Hose Fitting | 美制JIC螺纹 74°密封 JIC Female 74° Cone Seat | | S16711 (P78) S26711 (P79) S26711-T (P79) S26711D (P79) S26711D-SM (P80) |
| | | | S26741 (P80) S26741-T (P80) S26791 (P81) S26791-T (P81) S26791K (P81) |
| | 公制螺纹水管接头 Metric Female Water wash Inserts | | S20011-T (P82) |
| | SAE法兰轻系列 SAE Flange Light Series | | S87311 (P82) S87341 (P83) S87391 (P83) |
| | SAE法兰重系列 SAE Flange Heavy Series | | S87611 (P84) S87641 (P84) S87691 (P85) |
| | 矿用接头芯 MT Staplelock Male | | S60011 (P85) |
| | 铰接式 Banjo | | S70011 (P86) S72011 (P86) S700M (P87) S720B (P87) |
| | 双面连接接头 Double Connector | | S90011 (P87) |

| | | | |
|---------------------------|---|--|--|
| 内锁式软管接头 Interlock Fitting | 公制24° 锥重系列 Metric Thread 24° Cone Heavy Series | | S20513-T (P88) S20543-T (P88) S20593-T (P88) |
| | 英管螺纹60° 锥面密封 BSP Thread 60° Cone Fitting | | S22613-OR (P89) S22643-OR (P89) S22693-OR (P89) |
| | 美制JIC螺纹 74°密封 JIC 74° Cone Fitting | | S26713 (P90) S26743 (P90) S26793 (P90) |
| | 美制ORFS螺纹密封 ORFS Female Flat Seat | | S14213 (P91) S24213 (P91) S24243 (P91) S24293 (P92) |
| | SAE法兰轻系列 SAE Flange Light Series | | S87313 (P92) S87343 (P92) S87393 (P93) |
| | SAE法兰重系列 SAE Flange Heavy Series | | S87613 (P93) S87643 (P93) S87693 (P94) |
| | 9000PSI法兰系列 Flange 9000PSI Series | | S87913 (P94) S87943 (P94) S87993 (P95) |

过渡接头 Adapter

带有 A 字样型号 表示三柯主打产品（备货目标）客户可以选择性的采购

| DIN半螺牙 Metric Thread Bite Type | 管与管连接 Tube to tube |  |  |  |  |  |  |  |
|--------------------------------|---|---|---|--|---|---|---|---|
| | 组合连接 Tube to swivel |  |  |  |  |  |  | |
| | S1C S1D (P97) | S1C9 S1D9 (P97) | S1C-Y S1D-Y (P98) | SAC SAD (P98) | SXC SXD (P99) | S6C/LN S6D/LN (P99) | S6C9/LN S6D9/LN (P100) | |
| | 油口连接 Male stud connector |  |  |  |  |  |  |  |
| | S1DB (P104) | S1DB-WD (P105-106) | S1DM (P107) | S1DM-WD (P108) | S1DG (P109-110) | S1DH (P111) | S1DO (P112) | |
| |  |  |  |  |  |  | | |
| | S113 (P113) | S1DN (P113-114) | S2HD-W (P115) | S2MD-WDW (P115) | S2GD-W (P116) | S2BD-WDW (P117) | | |
| | 可调向接头 Lock nut adjustable |  |  |  |  |  |  | |
| | S1DG4-OG (P118) | S1DG9-OG (P118) | S1DH4-OG (P119) | S1DH9-OG (P119) | S1DO4-OG (P120) | S1DO9-OG (P121) | | |

| DIN半螺牙 Metric Thread Bite Type | 法兰接头 Flange adapters |  |  |  |  |  |  |  |
|--------------------------------|---|---|---|---|---|---|---|---|
| | 铰接接头 Banjo fitting |  |  |  |  |  |  |  |
| | 堵头 Plugs |  |  |  |  | | | |
| | 卡套螺母 Retaining nuts |  | |  | | | | |
| 公制接头 Metric Thread Fitting | 公制螺纹O形圈 平面密封接头 Metric Male O-Ring |  |  |  |  |  |  | |
| | S1EN (P140) | S1ET-SP (P141) | S1EW (P141) | S1EW9 (P142) | S2E9 (P142) | S2WE (P143) | | |
| |  |  |  |  |  |  | | |

| | | | | | | | |
|-----------------------------------|---|--|--|--|--|--|--|
| A 国标、部标接头 GB,JB Thread Fitting | 公制螺纹74° 锥面扩口密封接头 Metric Thread 74° Cone Flared Tube Fitting | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | 日本公制螺纹60° 锥面密封接头 Japanese Metric Thread 60° Cone Flared Tube Fitting | | | | | | |
| | | | | | | | |
| | | | | | | | |

| | | | | | |
|------------------------------|--|--|--|--|--|
| 英制接头 BSP,BSPT Thread Fitting | 日本英管螺纹60° 锥面密封接头 Japanese BSP Thread 60° Cone Fitting | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | 英管螺纹60° 锥面密封接头 BSP Thread 60° Cone Fitting | | | | |
| | | | | | |
| | | | | | |
| | 油口堵头 Plug | | | | |
| | | | | | |

| | | | |
|----------------------------------|---|--|---|
| 英制接头 BSP, BSPT Thread Fitting | 英管螺纹60° 锥面密封接头 BSP Thread 60° Cone Fitting | | SBB (P184) SCB (P184) SABBG-OG (P184) SABGB-OG (P185) S9B (P185) |
| | 英锥管螺纹接头 BSPT Thread Fitting | | S1T-SP (P185) S1T9-SP (P186) S4T-SP (P186) S5GT (P186) S5T-SP (P187) S5T9-SP (P187) |
| | | | S7T (P188) S7T9 (P188) SGT (P188) SZT (P189) |
| | 油口堵头 Plug | | S4G (P189) S4B (P189) S4BN (P190) S4B-WD (P190) S4BN-WD (P190) |

英制接头 BSP, BSPT Thread Fitting

A

目录

| | | | |
|---|-------------------|--|---|
| 美制接头 JIC, ORFS, SAE, NPT And NPSM Thread Fitting | 美制螺纹74° 锥面密封接头 | | S1J (P191) S1J4 (P191) S1J9 (P192) S2J (P192) S2J9 (P193) SAJ (P193) |
| | | | SBJ (P194) SCJ (P194) S3J (P194) S4J (P195) S9J (P195) S9J-CAP (P195) |
| | | | S6J-LN (P196) S6J4-LN (P196) S6J9-LN (P196) S1JFL (P197) S1JFL9 (P197) S1JFS (P198) |
| | | | S1JFS9 (P198) S1JN (P199) S1JN4 (P200) S1JN9 (P201) S1JN9-L (P202) S1JN9-LL (P202) |
| | | | S1JO (P203) S1JO4-OG (P204) S1JO9-OG (P205) S1JB-WD (P206) S1JH (P207) S1JH4-OG (P207) |
| | | | S1JH9-OG (P208) S1JG (P208) S1JG4-0G (P209) S1JG9-0G (P209) S1JM-WD (P210) S1JT-SP (P210) |
| | | | S1JT9-SP (P211) S2MJ-WD (P211) S2TJ (P212) S2HJ (P12) S2OJ (P213) SAJ6JJ-LN (P213) |
| | | | SAJJ6J-LN (P214) SAJJO-OG (P214) SAJOJ-OG (P214) |

美制接头 JIC, ORFS, SAE, NPT And NPSM Thread Fitting

A

目录

| | | | | | | | |
|---|------------------|--|--|--|--|--|--|
| A 美制接头 JIC, ORFS, SAE, NPT And NPSM Thread Fitting | 美制螺纹O形圈 | | | | | | |
| | 平面ORFS接头 | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | 美制螺纹 NPT,NPSM 接头 | | | | | | |
| | | | | | | | |
| | 油口堵头 Plug | | | | | | |

| | | | | | |
|-------------------|-------------------|--|--|--|--|
| 焊接法兰 Weld Fitting | 焊接法兰 Weld Fitting | | | | |
| | 法兰夹 Flange Clamps | | | | |

其它产品 Other Fitting



| | | | |
|--------|--|--|---------------------|
| 三柯新品发布 | | | 定制件和快速接头 |
| | | | 尼龙螺旋保护套(RNL) (P246) |



软管总成订货方法

How to order Assembly

软管总成订货代号

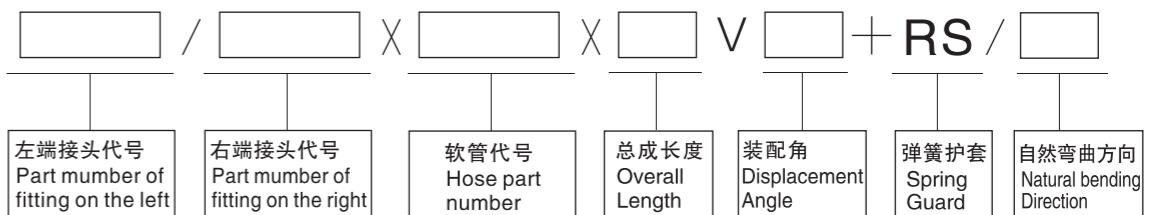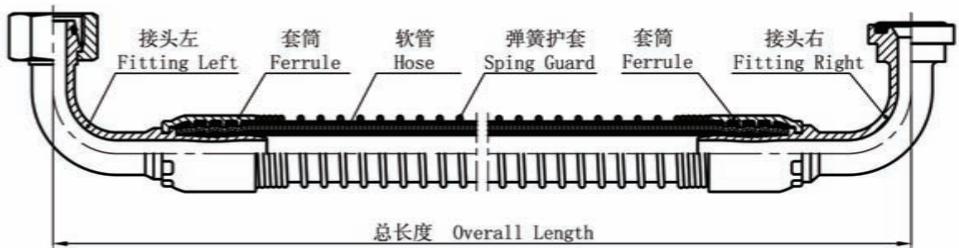

订货示例1：S20491-30-12T/S87391-12-12X2T12X1200V90+RS/SSX

当无装配角、自然弯曲方向或弹簧护套时，则代号中这些内容可省去不写。




订货示例2：当接头1与接头2相同时，只标一个接头的代号。

S20491-30-12TX2T12X1200V90

软管总成长度表示方法

How to measure Assembly

软管总成长度L 以从接头芯端面或弯接头芯中心为基准进行测量。



软管总成


Hydraulic Hose Assembly

三柯暂未提供总成定制服务，但我们可以提供高效率的流体连接解决方案，服务客户。

软管总成装配角表示方法

How to Measure Displacement Angle


置胶管总成在同一直线上,其中一个接头为垂直方向;按顺时针方向测量另一个接头与垂直方向接头之间的夹角。此夹角即为装配角。

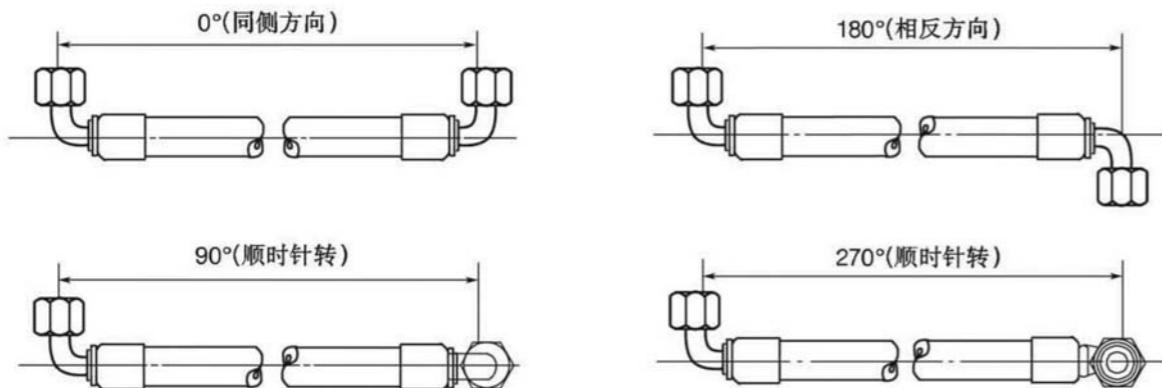装配角允许误差 $\pm 3^\circ$

软管总成装配角测量

HOW TO MEASURE DISPLACEMENT ANGLE

当总成的两端接头均为弯接头时, 装配时两弯接头间有一角度关系。测量时, 把软管总成拉直, 并沿直线方向看, 把弯接头1置垂直向上方向, 按顺时针测量弯接头2与垂直放置的弯接头1之间的夹角, 即为软管总成的装配角, 用V表示。如图所示, 例当装配角 α 为225°时, 标记为V225。

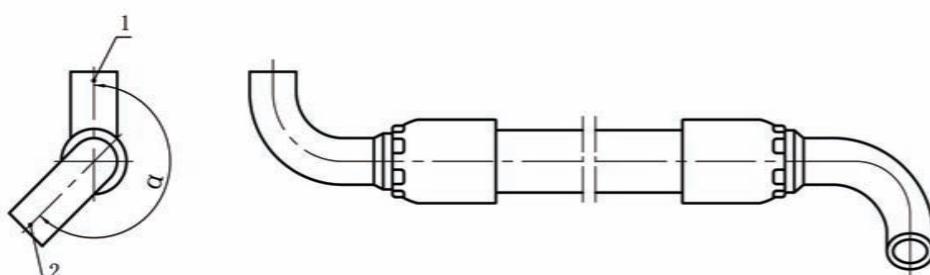

软管总成自然弯曲方向的规定

软管自然弯曲方向规定

Natural Bending Direction

由于软管库存时成捆盘扎, 在加工总成时难以拉直, 当有一端接头为弯接头时, 就存在弯曲接头与软管自然弯曲方向间的关系。

把软管自然放置的平面作为水平面。

软管总成的一端接头为弯曲接头, 另一端接头为直接头时有如下四种情况:

| 图示说明 | 表示 | 代号 | 图示说明 | 表示 | 代号 |
|------|--------------|-----|------|--------|-----|
| | 单头平面 垂直向外 | DCW | | 单头水平向上 | DSS |
| | 单头平面 垂直向内 | DCN | | 单头水平向下 | DSX |


软管总成的二端接头均为弯曲接头时有如下十种情况:

| 图示说明 | 表示 | 代号 | 图示说明 | 表示 | 代号 |
|------|-----------------------------------|------|------|---------------------------------|------|
| | 双头水平向下 | SSX | | 双头双向 平面垂直 接头1向内, 接头2向外 | SYC2 |
| | 双头水平向上 | SSS | | 接头1平面 垂直向内 接头2水平向上 | YNES |
| | 接头1向下, 接头2向上 | SSY | | 接头1平面 垂直向外 接头2水平向上 | YWES |
| | 双头同向平面 垂直向外 | STC | | 接头1平面 垂直向内 接头2水平向下 | YNEX |
| | 双头双向平面 垂直向外 接头1向外, 接头2向内 | SYC1 | | 接头1平面 垂直向外 接头2水平向下 | YWEX |

软管内径选择办法


How to choose with right inside diameter

流量 Flow

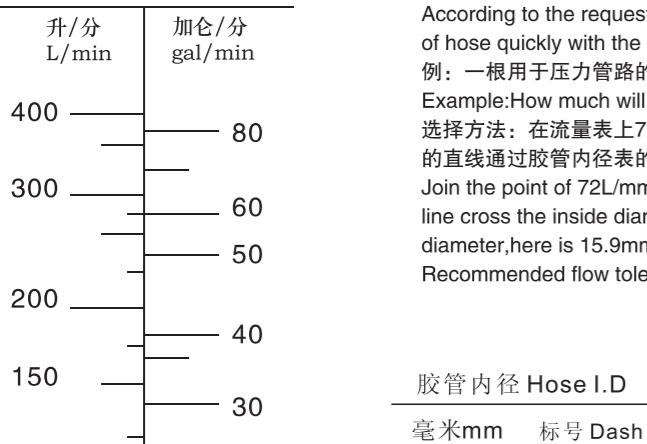

根据对于胶管的流量要求和流速要求，利用所示图表，可以迅速确定合适的胶管内径。
According to the request of the flow and velocity, we can ascertain the proper inside diameter of hose quickly with the following chart.

例：一根用于压力管路的胶管，要求通过的胶管的流量为72L/min，胶管内径应多大？
Example: How much will the inside diameter be if the flow of the hose is 70L/min pressure line?
选择方法：在流量表上72L/min处取一点，在流速表的6.2米/秒处取一点，连接两点的直线通过胶管内径表的12.7~15.9mm之间。应选择15.9mm（即标号为10）。
Join the point of 72L/min on the flow line and the point of 6.2m/s on the point where this straight line cross the inside diameter line is the cross the inside diameter line is the right inside diameter, here is 15.9mm.
Recommended flow tolerate the hydraulic oil whose maximum.

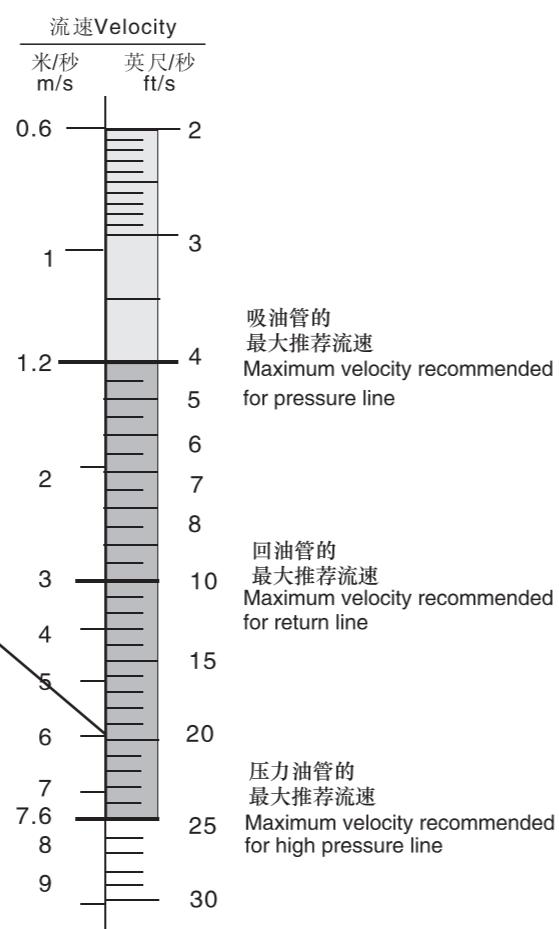


推荐流速的使用条件为最大粘度为65 cSt (20℃时)的液压油
Recommended flow tolerate the hydraulic oil whose maximum.

软管安装指南，技术要求


Assembly Installation, Technical requirements

正确地安装胶管至为重要，如胶管过长不但影响外观，而且增加成本。如胶管太短，当其受压而伸展或收缩时，没有足够的伸缩余地，会导致胶管被破坏。以下各图显示安装胶管时应注意的事项，依此安装可达最佳的工作效果并延长胶管的寿命。
Install the hose in a correct way is very important, it will affect the hose's appearance and cost a lot while it is too long, but if the hose is too short, it cannot flex while being crushed. Both too long and too short can break down the hose. So pay more attention to the following guide before you install the assembly:

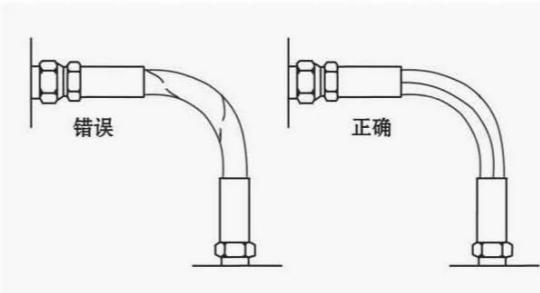


安装胶管时，切勿让其扭歪，否则当受压力时会破坏胶管或令联接处松脱。

Hose should not be twisted. Hose is weakened when installed in twisted position. Also pressure in twisted hose tends to loosen fitting connections. Design so that machine motion produces bending rather than twisting.

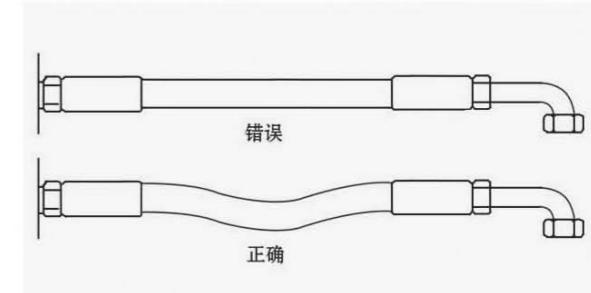


安装胶管时，切勿让其扭歪，否则当受压力时会破坏胶管或令联接处松脱。

Since hose may change in length from +2% to -4% under the surge of high pressure, provide sufficient slack for expansion and contraction.

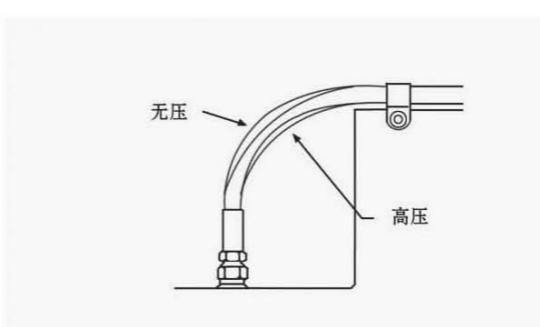


当胶管受压时，其长度会改变，因此切勿在弯曲位置上加任何夹子，使其能自由移动。


Don't use any clamps at the inflection so as it can move freely.

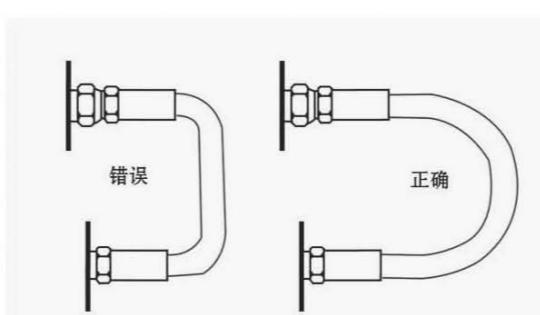

为避免胶管被破坏及流量受限制，胶管弯曲半径应尽可能加大。
Hose bending radius should be as big as possible when it is in motion.

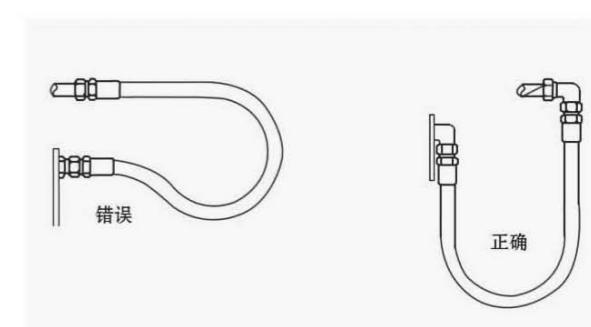

当弯曲半径太小时，宜采用直角接头以免胶管出现急弯。
Choose right angle fittings to avoid too small bending radius and excess force.

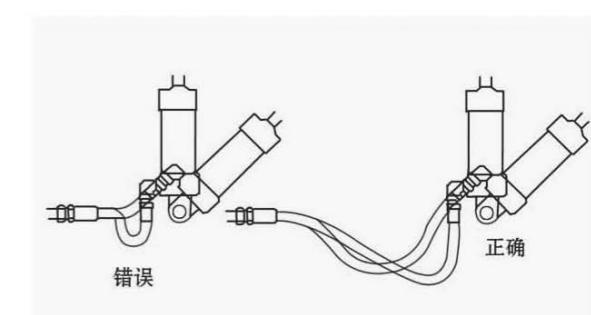

安装于移动物体间的胶管，应预留足够的长度，并避免和其他物体摩擦。
Reduce friction; avoid hose touching the object directly or far away from the object.
Correct Assembly Installation

技术说明

Safety Guide For Hose Assemblies

1、胶管尺寸

胶管内径要适当。管径过小会加大管路内介质的流速，是系统发热，降低效率，而且会产生过大的压力降，影响整个系统的性能。若胶管采用管夹固定或胶管过钢板等间隔物时，也要注意胶管的外经尺寸。

2、工作压力

资料中有关胶管的动态工作压力是指胶管的连续工作时允许的最高压力。按照有关国际标准规定的液压胶管的安全系数，我们推荐的工作压力通常为胶管最低爆破压力值的四分之一。

3、冲击压力和疲劳寿命

胶管的选择是根据液压系统设计的最高压力值来确定的。由于液压系统的压力值通常是动态的，有时会出现冲击压力，冲击压力峰值会大大高于系统的最高压值。但系统上一般都有溢流阀，故冲击压力不会严重影响胶管的疲劳寿命。对于冲击压力特别频繁的液压系统，建议选用特别耐脉动冲击的胶管产品。

4、温度范围

用户应该在胶管质量规范允许的温度内使用胶管，如果工作环境温度超过这一范围，将会影响到胶管的寿命，其承压能力也会大大降低。工作环境温度长期过高或过低的系统，建议采用软管护套。

5、化学相容性

若使用特殊的液压介质，用户应确保所选用的胶管总成其胶管内，外层，接头以及O型密封圈与介质相容。

6、弯曲半径

安装胶管总成时应注意到胶管的最小弯曲半径，若弯曲半径过小，将降低胶管的承压能力并影响其使用寿命。

7、磨擦

胶管在使用时如常与硬物接触或磨擦，建议在胶管外部加弹簧护套。

影响胶管总成使用情况的因素很多，只有按照工况正确选用胶管及接头，才能保证使用胶管的可靠性和经济性。

这些因素有：有关苏强格高压总成的其他技术问题，欢迎垂询。

There are many factors which can affect the usage condition of hose assembly, use the hose assembly and hose fittings in a correct way can ensure its reliability and economical efficiency. These factors are as follows:

1, Hose Dimension

The selection of hose inside diameter must be correctly made. If the hose inside diameter is too small, it will speed up the medium in the pipe-line, heated the system, lower the efficiency and produce excessive pressure drop which will affect the whole system's capability. If it will fix with hose clamp or cross the steel board, the outside diameter of hose should be pay more attention.

2, Working Pressure

The dynamic working pressure in this catalog refers to the allowable maximum pressure in condition of continuously working. According to the safety modulus of hydraulic hose ruled by international standard, we recommend that the working pressure is one quarter of the minimum blast Pressures.

3, Impact Pressure & Fatigue Life-span

After determining the maximum system pressure for a hydraulic system, hose selection can be made. For the hydraulic system's pressure always be dynamic, there often appears an impact pressure, the maximum impact pressure is much higher than the maximum system pressure. To be luckily, there is an over fallvalve in every hydraulic system, so high impact pressure cannot affect the fatigue life-span seriously. As for hydraulic system whose impact pressure appears very frequently, we advise you choose the special hydraulic hose which is able to endure the high impact Ppressure.

4, Temperature Range

User must ensure that the temperature is in an allowable range of hose, if exceeding this range, the life-span of hose will be shorten, and the capacity to endure pressure will get down. If the working condition temperature keep too high or too low in a long time, we advice you use the hose spring guard.

5, Chemical Compatibility

If use special hydraulic medium, user should ensure the material of hose inner side and cover, the hose fittings and O-ring can compatible with the special hydraulic medium.

6, Bending Radius

Pay more attention to its minimum bending radius when install the hose assembly, if the bending radius is smaller than the minimum one, the capacity of enduring pressure will get down and the life-span of hose will be shortened.

7, Friction

We advised you use a spring guard if the hose assembly is always in the condition of touching and making friction with hard object. Any technical question about Stronger Hydraulic hose assembly, welcome to inquire!

软管内胶、接头材质与化学物质的相溶性

Intermiscibility of Hose lining, fitting material, chemical substances

| E=excellent 优秀的 C=conditional 限定条件下使用的 U=unsatisfactory 不适用的 G=good 好的 | 三元乙丙橡胶 EPDM | 合成橡胶 Synthetic Rubber | 铁氟龙 Teflon | 热塑性橡胶 Thermoplastic Elastomer | 钢Steel | 黄铜Brass | 不锈钢 Stainless Steel |
|---|----------------|-----------------------|------------|-------------------------------|----------------|---------|---------------------|
| Fluid 流体 | Hose 软管 | | | | 金属Metal | | |
| acetaldehyde 乙醛 | E | U | E | G | G | E | E |
| acetic acid , glacial 冰醋酸 | E | U | E | C | U | U | C |
| acetic acid, 10% 乙酸,10% | C | U | E | C | U | U | C |
| acetone 丙酮 | E | U | E | G | E | E | E |
| acetyl acetone 乙酰丙酮 | E | U | E | G | U | C | C |
| acetyl chloride 乙酰氯 | U | U | E | U | C | C | C |
| acetylene 乙炔 | E | U | E | G | E | E | E |
| air wet 湿空气 | E | E | E | C | U | G | E |
| aluminum chloride 氯化铝 | E | E | E | E | U | U | U |
| aluminum fluoride 氟化铝 | E | E | E | E | U | U | U |
| aluminum nitrate 硝酸铝 | E | E | E | E | U | U | C |
| aluminum sulfate 硫酸铝 | E | E | E | G | U | C | E |
| alums 明矾 | E | E | E | E | U | C | E |
| ammonia, anhydrous 无水氨 | U | U | G | U | E | U | E |
| ammonia, aqueous 氨水 | E | U | G | U | E | U | E |
| ammonia, cold 冷氨水 | E | U | G | U | E | U | E |
| ammonia, hot 热氨水 | E | U | G | U | E | U | E |
| ammonium carbonate 碳酸铵 | E | U | E | C | C | U | C |
| ammonium chloride 氯化铵 | E | E | E | C | U | U | C |
| ammonium hydroxide 氢氧化铵 | E | C | E | U | G | U | C |
| ammonium nitrate 硝酸铵 | E | G | E | C | G | U | G |
| ammonium phosphate 磷酸铵 | E | E | E | C | U | C | G |
| ammonium sulfate/sulfide 硫酸铵, 硫化铵 | E | E | E | C | U | U | G |
| amyl acetate 乙酸戊酯, 香蕉油 | E | U | E | U | E | E | E |
| amyl alcohol 戊醇 | E | G | E | E | G | G | E |
| aniline dyes 苯胺染料 | E | U | E | U | U | C | G |
| aniline, aniline oil 苯胺 | E | U | E | U | E | U | E |
| arsenic acid 砷酸 | E | E | E | G | U | U | G |
| asphalt 沥青 | E | C | E | G | E | G | E |
| barium chloride 氯化钡 | E | E | E | C | U | G | G |
| barium hydroxide 氢氧化钡 | E | E | E | G | G | U | G |
| barium sulfide 硫化钡 | E | E | E | C | C | U | G |
| benzene,A97benzol 苯 | U | U | E | C | G | E | E |
| benzin 石油精 | U | G | E | C | E | E | E |
| benzoic acid 苯甲酸 | U | U | E | C | U | G | G |
| benzyl alcohol 苯甲醇 | E | U | E | C | E | G | E |
| borax 硼砂 | E | G | E | G | E | E | E |
| boric acid 硼酸 | E | G | E | G | U | G | C |
| brine 浓盐水 | E | G | E | C | U | G | G |
| bromine 溴 | U | U | E | U | U | C | U |
| butyl alcohol 丁醇 | E | E | E | G | G | G | G |
| butyl stearate 硬脂酸丁酯 | U | U | E | - | G | G | G |
| butylene 丁烯 | U | U | E | - | E | E | E |
| butyraldehyde 丁醛 | E | U | E | - | E | E | E |
| calcium acetate 醋酸钙 | E | G | E | C | G | G | G |
| calcium bisulfate 硫酸氢钙 | U | E | E | G | U | C | C |

| E=excellent 优秀的 C=conditional 限定条件下使用的 U=unsatisfactory 不适用的 G=good 好的 | | 三元乙丙橡胶 EPDM | 合成橡胶 Synthetic Rubber | 铁氟龙 Teflon | 热塑性橡胶 Thermoplastic Elastomer | 钢Steel | 黄铜Brass | 不锈钢 Stainless Steel |
|--|---|-------------|-----------------------|------------|-------------------------------|--------|---------|---------------------|
| Fluid 流体 | | Hose 软管 | | | Metal 金属 | | | |
| calcium chloride 氯化钙 | E | E | E | E | G | G | G | |
| calcium hydroxide 氢氧化钙 | E | E | E | C | G | G | G | |
| calcium hypochlorite 次氯酸钙 | E | U | E | C | U | G | C | |
| calcium nitrate 硝酸钙 | E | E | E | E | G | G | G | |
| cane sugar liquors 蔗糖汁 | E | E | E | E | E | G | E | |
| carbolic acid 石碳酸, 苯芬 | E | U | E | U | U | E | E | |
| carbon dioxide 二氧化碳 | E | G | E | E | E | E | E | |
| carbon disulfide 二硫化碳 | U | U | E | C | G | G | G | |
| carbon monoxide 一氧化碳 | E | G | E | E | E | E | E | |
| carbon tetrachloride 四氯化碳 | U | U | E | U | U | G | G | |
| carbonic acid 碳酸 | E | G | E | C | U | C | E | |
| castor oil 蓖麻油 | E | E | E | G | E | E | E | |
| cellosolve acetate 乙酸溶纤济 | E | U | E | U | U | U | E | |
| china wood oil (tung oil) 桐油 | U | G | E | C | E | G | E | |
| chlorine 氯 | U | U | U | U | C | C | C | |
| chloroacetic acid 氯乙酸 | E | U | E | U | U | U | U | |
| chloroacetone 氯丙酮 | E | U | E | U | G | G | G | |
| chlorobenzene 氯苯 | U | U | E | U | G | G | G | |
| chloroform 氯仿 | U | U | E | U | G | G | G | |
| chlosulfonic acid 氯磺酸 | U | U | E | U | G | U | G | |
| chrome plating solution 镀铬溶液 | E | U | E | - | C | U | U | |
| chromic acid 铬酸 | E | U | E | - | C | U | U | |
| citric acid 柠檬酸 | E | E | E | C | C | C | C | |
| copper chloride 氯化铜 | E | E | E | E | U | U | U | |
| copper cyanide 氰化铜 | E | E | E | - | E | U | G | |
| copper sulfate 硫酸铜 | E | E | E | G | U | C | G | |
| cotton seed oil 棉子油 | U | G | E | E | E | E | E | |
| creosote (coal tar) 煤焦油 | U | C | E | U | E | C | E | |
| crude oil 原油 | U | G | E | C | G | U | G | |
| cyclohexanone 环己酮 | E | U | E | G | E | E | E | |
| detergent / Water solution 清洁剂水溶液 | E | E | E | C | G | E | E | |
| dibenzyl ether 二苄醚 | E | U | E | - | G | G | G | |
| diesel oil 柴油 | U | C | E | C | E | E | E | |
| ethyl acetate 乙酸乙酯 | E | U | E | C | E | E | E | |
| ethyl alcohol (ethanol) 乙醇 | E | E | E | C | E | E | E | |
| ethyl benzene 乙苯 | E | U | E | | E | G | G | |
| ethyl cellulose 乙基纤维素 | E | G | E | C | E | G | G | |
| ethyl chloride 氯乙烷 | U | U | E | U | E | E | E | |
| ethylene dichloride 二氯乙烯 | E | U | E | U | G | C | G | |
| ethylene glycol 亚乙基二醇 | E | E | E | C | E | G | E | |
| ferric chloride 氯化铁 | E | G | E | - | U | U | U | |
| ferric nitrate 硝酸铁 | E | E | E | C | U | U | G | |
| ferric sulfate 硫酸铁 | E | G | E | C | U | U | E | |
| formaldehyde 甲醛 | E | C | E | C | E | E | E | |
| formic acid 甲酸 | E | C | E | U | U | C | C | |
| fuel oil 燃料油 | U | G | E | E | E | E | E | |
| furfural 糠醛 | E | C | E | - | G | G | G | |
| gasohol 酒精汽油混合燃料 | U | U | E | G | E | E | E | |
| gasoline 汽油 | U | C | E | E | E | E | E | |
| glycerine / glycerol 丙三醇甘油 | E | E | E | E | E | G | E | |

软管内胶、接头材质与化学物质的相溶性

Intermiscibility of Hose lining, fitting material, chemical substances

| E=excellent 优秀的 C=conditional 限定条件下使用的 U=unsatisfactory 不适用的 G=good 好的 | | 三元乙丙橡胶 EPDM | 合成橡胶 Synthetic Rubber | 铁氟龙 Teflon | 热塑性橡胶 Thermoplastic Elastomer | 钢Steel | 黄铜Brass | 不锈钢 Stainless Steel |
|--|---|-------------|-----------------------|------------|-------------------------------|--------|---------|---------------------|
| Fluid 流体 | | Hose 软管 | | | Metal 金属 | | | |
| helium 氦 | E | C | G | C | E | E | E | |
| heptane 庚烷 | U | G | E | E | E | E | E | |
| hexane 己烷 | U | G | E | E | E | E | E | |
| hydraulic oils 液压油 | G | G | G | G | G | G | G | |
| phosEster/petroleum blend 石油混合物 | - | U | E | C | E | E | E | |
| silicone oils 硅油 | E | E | E | E | E | E | E | |
| straight petroleum base 石油基 | U | E | E | E | E | E | E | |
| straight phosphate ester 磷酸酯 | E | U | E | C | E | E | E | |
| water glycol 乙二醇 | E | E | E | C | E | E | E | |
| water petroleum emulsion 油水乳液 | U | G | E | C | C | E | E | |
| hydrobromic acid 氢溴酸溴化氢 | E | U | E | U | E | U | E | |
| hydrochloric acid 盐酸 | C | U | E | U | U | U | U | |
| hydrocyanic acid 盐酸 | E | C | E | - | E | E | G | |
| hydrofluoric acid 氢氟酸 | C | U | E | U | U | U | U | |
| hydrogen 氢 | E | C | C | C | E | E | E | |
| hydrogen peroxide 过氧化氢 | C | G | E | G | U | U | G | |
| hydrogen sulfide dry 干的硫化氢 | E | U | C | C | E | G | G | |
| isooctane 异辛烷 | U | G | E | E | E | E | E | |
| isopropyl alcohol 异丙醇 | E | G | E | C | E | E | E | |
| isopropyl ether 异丙醚 | U | C | E | - | G | G | G | |
| kerosene 煤油 | U | C | E | G | E | E | E | |
| lacquer / lacquer solvents 真漆/漆用溶剂 | U | U | E | C | U | E | E | |
| linseed oil 亚麻籽油 | U | G | E | G | E | E | E | |
| magnesium chloride 氯化镁 | E | E | E | C | E | C | C | |
| magnesium hydroxide 氢氧化镁 | E | G | E | C | E | G | E | |
| magnesium sulfate 硫酸镁 | E | E | E | C | E | E | E | |
| maleic acid 马来酸 | E | U | E | C | E | G | G | |
| maleic anhydride 顺丁烯二酸酐 | U | U | E | C | G | U | E | |
| malic acid 苹果酸, 羟基丁二酸 | U | G | E | - | U | - | E | |
| mercuric chloride 氯化汞 | E | E | E | E | U | U | U | |
| mercury 汞 | E | E | E | E | E | U | E | |
| methanol 甲醇 | E | G | E | C | G | G | E | |
| methyl bromide 甲基溴吗啡 | U | U | E | U | E | E | G | |
| methyl butyl ketone 甲基丁基酮 | E | U | E | C | E | E | E | |
| methyl chloride 氯甲烷 | U | U | E | U | E | E | E | |
| methyl ethyl ketone 甲基乙基酮 | E | U | E | C | G | G | G | |
| methyl isobutyl ketone 甲基异丁酮 | G | U | E | U | G | G | G | |
| methyl isopropyl ketone 甲基异丙酮 | G | U | E | U | G | G | G | |
| methylene chloride 二氯甲烷 | G | U | E | U | G | G | G | |
| mineral oils 矿物油 | U | E | E | G | E | E | E | |
| naphtha 石脑油 | U | U | E | G | - | - | - | |
| naphthalene 荚 | U | U | E | G | E | G | E | |
| natural gas 天燃气 | U | C | U | C | G | G | G | |
| nickel acetate 醋酸镍 | E | U | E | U | G | C | E | |
| nickel chloride 氯化镍 | E | G | E | U | U | U | G | |
| nickel sulfate 硫酸镍 | E | E | E | U | U | G | G | |

| E=excellent 优秀的 C=conditional 限定条件下使用的 U=unsatisfactory 不适用的 G=good 好的 | | 三元乙丙橡胶 EPDM | 合成橡胶 Synthetic Rubber | 铁氟龙 Teflon | 热塑性橡胶 Thermoplastic Elastomer | 钢Steel | 黄铜Brass | 不锈钢 Stainless Steel |
|--|-------------|-------------|-----------------------|------------|-------------------------------|--------|---------|---------------------|
| Fluid 流体 | | Hose 软管 | | | 金属Metal | | | |
| nitric acid, over 10% | 硝酸,超过10% | U | U | E | U | U | U | E |
| nitric acid, to 10% | 硝酸,最高10% | U | U | E | C | U | U | E |
| nitrobenzene | 硝基苯 | E | U | E | U | E | G | E |
| nitrogen | 氮 | E | E | E | E | E | E | E |
| octyl alcohol | 辛醇 | E | E | E | E | E | E | E |
| Oleic acid | 油酸 | U | U | E | G | C | E | G |
| oleum (fuming sulfuric acid) | 发烟硫酸 | U | U | E | U | G | U | G |
| oxalic acid | 草酸 | E | G | E | C | U | C | C |
| oxygen | 氧气 | U | U | U | U | G | G | G |
| palmitic acid | 十六酸 | E | G | E | E | G | - | E |
| para-dichlorobenzene | 对二氯苯 | U | U | E | - | G | G | G |
| pentane | 戊烷 | U | E | E | G | G | G | G |
| perchloric acid | 高氯酸 | E | C | E | U | U | U | U |
| perchloroethylene | 全氯乙烯 | U | U | E | U | C | G | G |
| phenol (carbolic acid) | 苯酚 | U | U | E | U | U | E | E |
| phosphoric acid | 磷酸 | E | U | E | U | U | E | E |
| phosphorous trichloride | 三氯化磷 | E | U | E | U | C | U | C |
| potassium acetate | 醋酸钾 | E | G | E | - | C | G | C |
| potassium chloride | 氯化钾 | E | E | E | E | C | E | |
| potassium cyanide | 氰化钾 | E | E | E | C | U | G | |
| potassium dichromate | 重铬酸钾 | E | E | E | E | C | C | C |
| potassium hydroxide (over 10%) | 氢氧化钾(超过10%) | E | C | E | U | G | G | G |
| potassium hydroxide(to 10%) | 氢氧化钾(最高10%) | E | G | E | C | G | G | G |
| potassium nitrate | 硝酸钾 | E | E | E | E | G | G | E |
| potassium sulfate | 硫酸钾 | E | E | E | E | - | - | - |
| propane | 丙烷 | U | C | - | - | E | E | E |
| propyl acetate | 乙酸丙酯 | E | U | E | - | E | - | E |
| propylene | 丙烯 | U | U | E | - | E | E | E |
| refrigerant R-12 | 制冷剂R-12 | U | C | - | G | E | E | E |
| refrigerant R-13 | 制冷剂R-13 | U | C | - | G | E | E | E |
| refrigerant R-22 | 制冷剂R-22 | U | U | C | U | E | E | E |
| sewage | 污水 | E | E | E | G | G | G | G |
| soap (water solutions) | 肥皂水 | E | E | E | C | E | E | E |
| sodium acetate | 醋酸钠 | E | G | E | - | E | E | G |
| sodium bicarbonate | 碳酸氢钠 | E | E | E | G | G | E | |
| sodium borate | 四硼酸钠 | E | E | E | E | E | E | E |
| sodium carbonate | 碳酸钠 | E | E | E | E | E | G | E |
| sodium chloride | 氯化钠 | E | E | E | E | U | C | C |
| sodium cyanide | 氰化钠 | E | E | E | E | E | - | C |
| sodium hydroxide (over 10%) | 氢氧化钠(超过10%) | E | U | E | C | C | C | C |
| sodium hydroxide (to 10%) | 氢氧化钠(最高10%) | E | C | E | G | C | G | C |
| sodium hypochlorite | 次氯酸钠 | C | C | E | C | U | U | U |
| sodium metaphosphate | 偏磷酸钠 | E | E | E | E | E | G | G |
| sodium nitrate | 硝酸钠 | E | G | E | E | E | C | E |
| sodium perborate | 高硼酸钠 | E | G | E | - | C | U | C |
| sodium peroxide | 过氧化钠 | E | G | E | - | U | U | C |
| sodium phosphates | 磷酸钠 | E | E | E | U | E | G | |
| sodium silicate | 硅酸钠 | E | E | E | E | E | E | |
| sodium sulfate | 硫酸钠 | E | E | E | E | G | G | G |
| sodium thiosulfate | 硫代硫酸钠 | E | G | E | E | U | U | C |

软管内胶、接头材质与化学物质的相溶性

Intermiscibility of Hose lining, fitting material,chemical substances

| E=excellent 优秀的 C=conditional 限定条件下使用的 U=unsatisfactory 不适用的 G=good 好的 | 三元乙丙橡胶 EPDM | 合成橡胶 Synthetic Rubber | 铁氟龙 Teflon | 热塑性橡胶 Thermoplastic Elastomer | 钢Steel | 黄铜Brass | 不锈钢 Stainless Steel |
|--|-------------------|-----------------------|------------|-------------------------------|---------|---------|---------------------|
| Fluid 流体 | | Hose 软管 | | | 金属Metal | | |
| soy bean oil | 豆油 | U | G | E | G | E | E |
| stannic chloride | 氯化锡 | E | E | E | C | U | U |
| steam (up to 388° F) | 水蒸汽(最高388° F) | E | U | E | U | E | E |
| stearic acid | 硬脂酸 | E | G | E | G | C | C |
| styrene | 苯乙烯 | U | U | E | U | E | E |
| sulfur | 硫 | E | C | E | G | E | U |
| sulfur chloride | 氯化硫 | U | U | E | - | G | - |
| sulfur dioxide | 二氧化硫 | E | U | E | U | E | G |
| sulfur trioxide | 三氧化硫 | E | U | E | U | G | C |
| sulfuric acid (oven 10%) | 硫酸(超过10%) | U | U | E | U | C | U |
| sulfuric acid (to 10%) | 硫酸(最高10%) | E | U | E | U | U | G |
| sulfurous acid | 亚硫酸 | E | C | E | U | U | C |
| tannic acid | 丹宁酸 | E | E | E | G | E | E |
| tar (bituminous) | 柏油 | U | C | E | G | E | E |
| tartaric acid | 酒石酸 | E | G | E | G | U | C |
| tertiary butyl alcohol | 叔丁醇 | E | G | E | G | G | G |
| titanium tetrachloride | 四氯化钛 | U | U | E | - | E | U |
| toluene (toluol) | 甲苯 | U | U | E | U | E | E |
| trichlorethylene | 三氯乙烯 | E | U | E | U | E | G |
| tricresyl phosphate | 磷酸三(邻甲苯酯) | E | U | E | U | E | - |
| triethanolamine | 三乙醇胺 | E | C | E | U | E | E |
| tung oil | 桐油 | U | G | E | C | E | E |
| turpentine | 松节油 | U | C | E | G | G | G |
| varnish | 清漆 | U | C | E | G | E | G |
| vinyl chloride | 氯乙烯 | U | U | E | U | E | C |
| water (+151° F to +200° F) | 水(151° F 到200° F) | E | G | E | U | C | E |
| water (+201° F to +350° F) | 水(201° F 到350° F) | E | U | E | U | C | G |
| water (to +150° F) | 水(最高150° F) | E | E | E | E | C | G |
| xylene | 二甲苯 | U | U | E | C | E | E |
| zinc chloride | 氯化锌 | E | E | E | E | U | U |
| zinc sulfate | 硫酸锌 | E | E | E | - | U | C |

软管代号及技术参数
HOSE PART NO. AND SPECIFICATION

| 软管类型 | 软管标准 | 软管简号 | 通径 I.D | 5 | 6 | 8 | 10 | 13 | 16 | 19 | 22 | 25 | 32 | 38 | 51 |
|--|-------------|------|-----------|------|------|------|------|------|------|------|------|------|------|------|------|
| | | | 标号 DASH | -03 | -04 | -05 | -06 | -08 | -10 | -12 | -14 | -16 | -20 | -24 | -32 |
| 钢丝 编织 软管 Steel Wire Braid Hose | SAE 100R1AT | 1T | 最小弯曲半径 | 89 | 102 | 114 | 127 | 178 | 203 | 241 | | 305 | 419 | 508 | 635 |
| | | | 工作压力(Mpa) | 20.7 | 19.0 | 17.2 | 15.5 | 13.8 | 10.3 | 8.6 | | 6.9 | 4.3 | 3.4 | 2.6 |
| SAE 100R2AT | 2T | | 最小弯曲半径 | 89 | 102 | 114 | 127 | 178 | 203 | 241 | | 305 | 419 | 508 | 635 |
| | | | 工作压力(Mpa) | 34.5 | 34.5 | 29.3 | 27.6 | 24.1 | 19.0 | 15.5 | | 13.8 | 11.2 | 8.6 | 7.8 |
| DIN 20022 1SN | 1SN | | 最小弯曲半径 | 90 | 100 | 115 | 130 | 180 | 200 | 240 | | 300 | 420 | 500 | 630 |
| | | | 工作压力(Mpa) | 25.0 | 22.5 | 21.5 | 18.0 | 16.0 | 13.0 | 10.5 | | 8.8 | 6.3 | 5.0 | 4.0 |
| DIN 20022 2SN | 2SN | | 最小弯曲半径 | 90 | 100 | 115 | 130 | 180 | 200 | 240 | | 300 | 420 | 500 | 630 |
| | | | 工作压力(Mpa) | 41.5 | 40.0 | 35.0 | 33.0 | 27.5 | 25 | 21.5 | | 16.5 | 12.5 | 9.0 | 8.0 |
| EN 853 1SN | 1W | | 最小弯曲半径 | 90 | 100 | 115 | 130 | 180 | 205 | 240 | 280 | 300 | 420 | 500 | 630 |
| | | | 工作压力(Mpa) | 21.0 | 20.0 | 17.5 | 16.0 | 14.0 | 10.5 | 9.0 | 8.0 | 7.0 | 4.4 | 3.5 | 2.6 |
| GB 3683 1型 | 2W | | 最小弯曲半径 | 90 | 100 | 115 | 130 | 180 | 205 | 240 | 280 | 300 | 420 | 500 | 630 |
| | | | 工作压力(Mpa) | 35.0 | 35.0 | 32.0 | 28.0 | 25.0 | 20.0 | 16.0 | 14.0 | 14.0 | 11.0 | 9.0 | 8.0 |
| SAE 100 R12 | R12 | | 最小弯曲半径 | | | | 127 | 178 | 203 | 241 | | 305 | 419 | 508 | 635 |
| | | | 工作压力(Mpa) | | | | 27.6 | 27.6 | 27.6 | 27.6 | | 27.6 | 20.7 | 17.2 | 17.2 |
| DIN 20023-4SP | 4SP | | 最小弯曲半径 | | 150 | | 180 | 230 | 250 | 300 | | 340 | 460 | 560 | 660 |
| | | | 工作压力(Mpa) | | 50.0 | | 46.0 | 42.5 | 40.0 | 38.0 | | 32.0 | 21.0 | 18.5 | 17.5 |
| DIN 20023-4SH | 4SH | | 最小弯曲半径 | | | | | | 250 | 280 | | 340 | 460 | 560 | 700 |
| | | | 工作压力(Mpa) | | | | | | 45.0 | 42.0 | | 38.5 | 35.0 | 30.0 | 25.0 |
| GB10544 3型 | 4SC | | 最小弯曲半径 | 100 | 125 | 140 | 150 | 205 | 235 | 280 | | 360 | 460 | 560 | 710 |
| | | | 工作压力(Mpa) | 69.0 | 60.5 | 56.0 | 51.5 | 43.0 | 38.0 | 34.5 | | 27.5 | 20.5 | 17.0 | 17.0 |
| GB10544 4型 | 4SE | | 最小弯曲半径 | | | | | 200 | | 280 | | 340 | 460 | 560 | 700 |
| | | | 工作压力(Mpa) | | | | | 55.0 | | 42.0 | | 38.0 | 32.5 | 29.0 | 25.0 |


软管与接头芯、套筒配用表

HOSE AND SUITABLE FITTINGS,FERRULE

| 软管 简号 | 通径 I.D | 5 | 6 | 8 | 10 | 13 | 16 | 19 | 22 | 25 | 32 | 38 | 51 |
|----------|---------|------------|------------|------------|------------|------------|------------|------------|-----------|------------|-----------|-----------|-----------|
| | 标号 DASH | -03 | -04 | -05 | -06 | -08 | -10 | -12 | -14 | -16 | -20 | -24 | -32 |
| 1T | 配用套筒 | S00110-03A | S00110-04A | S00110-05A | S00110-06A | S00110-08A | S00110-10A | S00110-12A | | S00110-16A | S00110-20 | S00110-24 | S00110-32 |
| 1SN | 配用接头芯 | | | | | | | | | | | | |
| 2T | 配用套筒 | S03310-03A | S03310-04A | S03310-05A | S03310-06A | S03310-08A | S03310-10A | S03310-12A | | S03310-16A | S03310-20 | S03310-24 | S03310-32 |
| 2SN | 配用接头芯 | | | | | | | | | | | | |
| 1W | 配用套筒 | S00100-03 | S00100-04 | S00100-05 | S00100-06 | S00100-08 | S00100-10 | S00100-12 | S00100-14 | S00100-16 | S00100-20 | S00100-24 | S00100-32 |
| | 配用接头芯 | | | | | | | | | | | | |
| 2W | 配用套筒 | S00200-03 | S00200-04 | S00200-05 | S00200-06 | S00200-08 | S00200-10 | S00200-12 | S00200-14 | S00200-16 | S00200-20 | S00200-24 | S00200-32 |
| | 配用接头芯 | | | | | | | | | | | | |
| R12 | 配用套筒 | | S00400-04 | | S00400-06 | S00400-08 | S00400-10 | S00400-12 | | S00400-16 | S01400-20 | S01400-24 | S01400-32 |
| | 配用接头芯 | | | | | | | | | | | | |
| 4SP | 配用套筒 | | S00400-04 | | S00400-06 | S00400-08 | S00400-10 | S00400-12 | | S00400-16 | S00400-20 | S00400-24 | S00400-32 |
| | 配用接头芯 | | | | | | | | | | | | |
| 4SH | 配用套筒 | | | | | | S00400-10 | S00400-12 | | S00400-16 | S00401-20 | S00401-24 | S00401-32 |
| | 配用接头芯 | | | | | | | | | | | | |
| 4SC | 配用套筒 | | S01401-04 | | S01401-06 | S01401-08 | | S01401-12 | | S01401-16 | S00400-20 | S00400-24 | S00400-32 |
| | 配用接头芯 | | | | | | | | | | | | |
| 4SE | 配用套筒 | | | | S01400-08 | | S01400-12 | | S01400-16 | S01400-20 | S01400-20 | S01400-20 | S01400-32 |
| | 配用接头芯 | | | | | | | | | | | | |

软管实际工作压力与寿命关系图

HOSE ACTIVE WORKING PRESURE -WORKING LIFE

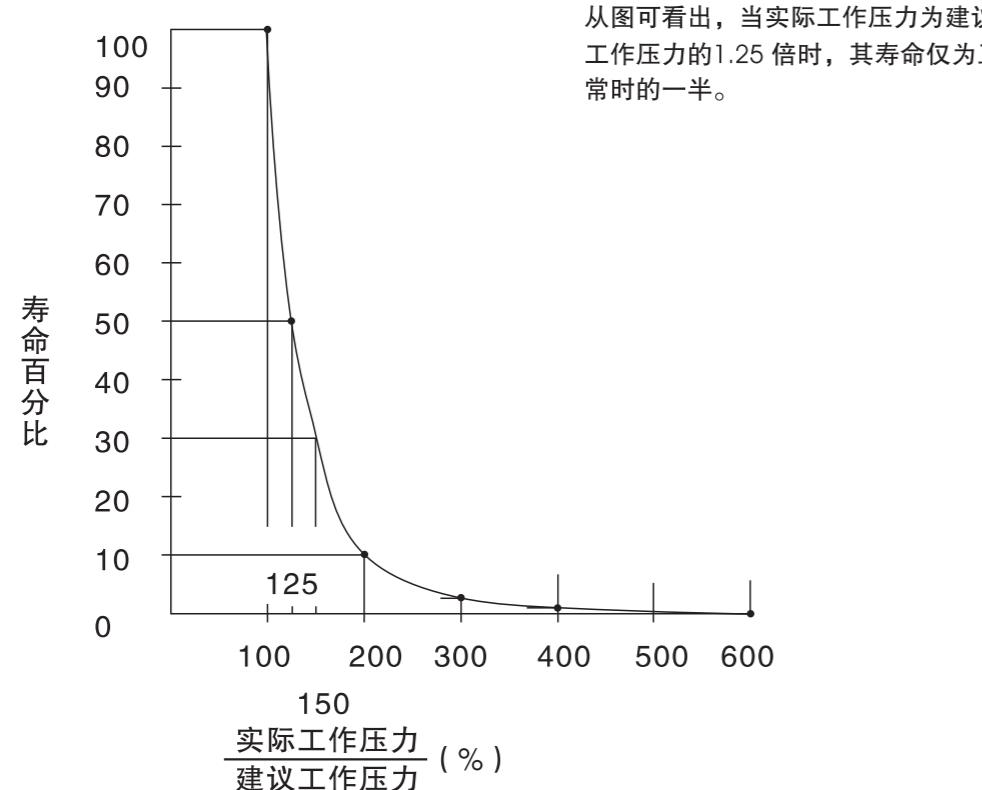

一层钢丝编织软管 One Steel Wire Braid Hose(SAE 100R1AT)

内衬层 Inner Tube: 耐油合成橡胶 Oil Resistant Synthetic Rubber

增强层 Reinforcement: 1层钢丝编织增强层 One Steel Wire Braid Reinforcement

外覆层 Cover: 耐油耐恶劣天气合成橡胶 Oil And Weather Resistant Synthetic

温度范围 Temperature Range: -40°C ~ +100°C

可用接头芯 Insert: xxxx1-xx-xx系列 xxxx1-xx-xx Series



| 软管代号 | 公称内径 | 软管尺寸 | | 软管内径 | 软管外径 | 最大工作压力 | 最小爆破压力 | 最小弯曲半径 | 配用套筒 |
|----------|------|-----------|--------|-----------|-----------|----------|--------------------|-----------------|------------|
| HOSE | DN | HOSE SIZE | | HOSE I.D. | HOSE O.D. | MAX W.P. | MIN.BURST PRESSURE | MIN.BEND.RADIUS | FERRULE |
| PART NO. | mm | DASH | Inch | mm | mm | MPa | MPa | mm | |
| 1T04 | 6 | -04 | 1/4" | 6.4 | 13.4 | 19.2 | 76.8 | 102 | S00110-04A |
| 1T05 | 8 | -05 | 5/16" | 7.9 | 15.0 | 17.5 | 70 | 114 | S00110-05A |
| 1T06 | 10 | -06 | 3/8" | 9.5 | 17.4 | 15.7 | 62.8 | 127 | S00110-06A |
| 1T08 | 13 | -08 | 1/2" | 12.7 | 20.6 | 14 | 56 | 178 | S00110-08A |
| 1T10 | 16 | -10 | 5/8" | 15.9 | 23.7 | 10.5 | 42 | 203 | S00110-10A |
| 1T12 | 19 | -12 | 3/4" | 19 | 27.7 | 8.7 | 8 | 241 | S00110-12A |
| 1T16 | 25 | -16 | 1" | 25.4 | 35.6 | 7 | 28 | 305 | S00110-16A |
| 1T20 | 32 | -20 | 1.1/4" | 31.8 | 43.5 | 4.3 | 17.2 | 419 | S00110-20A |
| 1T24 | 38 | -24 | 1.1/2" | 38.1 | 50.6 | 3.5 | 14 | 508 | S00110-24A |
| 1T32 | 51 | -32 | 2" | 50.8 | 64.1 | 2.6 | 10.3 | 635 | S00110-32A |

一层钢丝编织软管 One Steel Wire Braid Hose (EN 853 1SN)

内衬层 Inner Tube: 耐油合成橡胶 Oil Resistant Synthetic Rubber

增强层 Reinforcement: 1层钢丝编织增强层 One Steel Wire Braid Reinforcement

外覆层 Cover: 耐油耐恶劣天气合成橡胶 Oil And Weather Resistant Synthetic

温度范围 Temperature Range: -40°C ~ +100°C

可用接头芯 Insert: xxxx1-xx-xx系列 xxxx1-xx-xx Series

贮存要求
Storage requirements

软管总成的贮存要求

- 只要有可能，贮存温度应当在0~35°C之间，贮存期间产品的温度最高不得超过50°C。
- 贮存区不得停放能产生臭氧的装置。如汞蒸气灯、高电压电气装置、电动机或其他能产生电火花或放电的装置。
- 不能与腐蚀性产品放在一起或暴露在这些产品的挥发气体中。
- 应远离热源和能产生电场和磁场的设备。
- 应避免阳光或强烈人造光源直射。
- 应避免与尖锐的物体或地面接触。
- 应平放，堆叠不能很高。
- 应保证不受啮齿类动物的侵害。
- 贮存时遵守先进先出的原则。

| 软管代号 | 公称内径 | 软管尺寸 | | 软管内径 | 软管外径 | 最大工作压力 | 最小爆破压力 | 最小弯曲半径 | 配用套筒 |
|----------|------|-----------|--------|-----------|-----------|----------|--------------------|-----------------|------------|
| HOSE | DN | HOSE SIZE | | HOSE I.D. | HOSE O.D. | MAX W.P. | MIN.BURST PRESSURE | MIN.BEND.RADIUS | FERRULE |
| PART NO. | mm | DASH | Inch | mm | mm | MPa | MPa | mm | |
| 1SN04 | 6 | -04 | 1/4" | 6.4 | 13.4 | 22.5 | 90.0 | 100 | S00110-04A |
| 1SN05 | 8 | -05 | 5/16" | 7.9 | 15.0 | 21.5 | 85.0 | 115 | S00110-05A |
| 1SN06 | 10 | -06 | 3/8" | 9.5 | 17.4 | 18.0 | 72.0 | 130 | S00110-06A |
| 1SN08 | 13 | -08 | 1/2" | 12.7 | 20.6 | 16.0 | 64.0 | 180 | S00110-08A |
| 1SN10 | 16 | -10 | 5/8" | 15.9 | 23.7 | 13.0 | 52.0 | 200 | S00110-10A |
| 1SN12 | 19 | -12 | 3/4" | 19 | 27.7 | 10.5 | 42.0 | 240 | S00110-12A |
| 1SN16 | 25 | -16 | 1" | 25.4 | 35.6 | 8.8 | 35.0 | 300 | S00110-16A |
| 1SN20 | 32 | -20 | 1.1/4" | 31.8 | 43.5 | 6.3 | 25.0 | 420 | S00110-20A |
| 1SN24 | 38 | -24 | 1.1/2" | 38.1 | 50.6 | 5.0 | 20.0 | 500 | S00110-24A |
| 1SN32 | 51 | -32 | 2" | 50.8 | 64.1 | 4.0 | 16.0 | 630 | S00110-32A |

二层钢丝编织软管 Two Steel Wire Braid Hose (SAE 100R2AT)

内衬层 Inner Tube: 耐油合成橡胶 Oil Resistant Synthetic Rubber

增强层 Reinforcement: 2层钢丝编织增强层 Two Steel Wire Braid Reinforcement

外覆层 Cover: 耐油耐恶劣天气合成橡胶 Oil And Weather Resistant Synthetic

温度范围 Temperature Range: -40°C ~ +100°C

可用接头芯 Insert: xxxx1-xx-xx 系列 xxxx1-xx-xx Series



| 软管代号 | 公称内径 | 软管尺寸 | | 软管内径 | 软管外径 | 最大工作压力 | 最小爆破压力 | 最小弯曲半径 | 配用套筒 |
|----------|------|-----------|--------|-----------|-----------|----------|--------------------|-----------------|-----------|
| HOSE | DN | HOSE SIZE | | HOSE I.D. | HOSE O.D. | MAX W.P. | MIN.BURST PRESSURE | MIN.BEND.RADIUS | FERRULE |
| PART NO. | mm | DASH | Inch | mm | mm | MPa | MPa | mm | |
| 2T04 | 6 | -04 | 1/4" | 6.4 | 15.0 | 34.5 | 137.9 | 102 | S03310-04 |
| 2T05 | 8 | -05 | 5/16" | 7.9 | 16.7 | 29.3 | 117.2 | 114 | S03310-05 |
| 2T06 | 10 | -06 | 3/8" | 9.5 | 19.1 | 27.6 | 110.3 | 127 | S03310-06 |
| 2T08 | 13 | -08 | 1/2" | 12.7 | 22.2 | 24.1 | 96.5 | 178 | S03310-08 |
| 2T10 | 16 | -10 | 5/8" | 15.9 | 25.4 | 19.0 | 75.8 | 203 | S03310-10 |
| 2T12 | 19 | -12 | 3/4" | 19 | 29.3 | 15.1 | 62.0 | 241 | S03310-12 |
| 2T16 | 25 | -16 | 1" | 25.4 | 38.1 | 13.8 | 55.2 | 305 | S03310-16 |
| 2T20 | 32 | -20 | 1.1/4" | 31.8 | 48.3 | 11.2 | 44.8 | 419 | S03310-20 |
| 2T24 | 38 | -24 | 1.1/2" | 38.1 | 54.6 | 8.6 | 34.5 | 508 | S03310-24 |
| 2T32 | 51 | -32 | 2" | 50.8 | 67.4 | 7.8 | 31.0 | 635 | S03310-32 |

钢丝缠绕软管 Four Steel Wire Spiral Hose (GB/T10544 R12-SAE 100 R12-EN 856 R12)

内衬层 Inner Tube: 耐油合成橡胶 Oil Resistant Synthetic Rubber

增强层 Reinforcement: 4层钢丝缠绕增强层 Four Steel Wire spirals Reinforcement

外覆层 Cover: 耐油耐恶劣天气合成橡胶 Oil And Weather Resistant Synthetic

温度范围 Temperature Range: -40°C ~ +121°C

可用接头芯 Insert: xxxx2-xx-xx 系列 xxxx2-xx-xx Series



二层钢丝编织软管 Two Steel Wire Braid Hose (EN 853 2SN)

内衬层 Inner Tube: 耐油合成橡胶 Oil Resistant Synthetic Rubber

增强层 Reinforcement: 2层钢丝编织增强层 Two Steel Wire Braid Reinforcement

外覆层 Cover: 耐油耐恶劣天气合成橡胶 Oil And Weather Resistant Synthetic

温度范围 Temperature Range: -40°C ~ +100°C

可用接头芯 Insert: xxxx1-xx-xx 系列 xxxx1-xx-xx Series



| 软管代号 | 公称内径 | 软管尺寸 | | 软管内径 | 软管外径 | 最大工作压力 | 最小爆破压力 | 最小弯曲半径 | 配用套筒 |
|----------|------|-----------|--------|-----------|-----------|----------|--------------------|-----------------|-----------|
| HOSE | DN | HOSE SIZE | | HOSE I.D. | HOSE O.D. | MAX W.P. | MIN.BURST PRESSURE | MIN.BEND.RADIUS | FERRULE |
| PART NO. | mm | DASH | Inch | mm | mm | MPa | MPa | mm | |
| 2SN04 | 6 | -04 | 1/4" | 6.4 | 15.0 | 40.0 | 160.0 | 100 | S03310-04 |
| 2SN05 | 8 | -05 | 5/16" | 7.9 | 16.7 | 35.0 | 140.0 | 115 | S03310-05 |
| 2SN06 | 10 | -06 | 3/8" | 9.5 | 19.1 | 33.0 | 132.0 | 130 | S03310-06 |
| 2SN08 | 13 | -08 | 1/2" | 12.7 | 22.2 | 27.5 | 110.0 | 180 | S03310-08 |
| 2SN10 | 16 | -10 | 5/8" | 15.9 | 25.4 | 25.0 | 100.0 | 200 | S03310-10 |
| 2SN12 | 19 | -12 | 3/4" | 19 | 29.3 | 21.5 | 85.0 | 240 | S03310-12 |
| 2SN16 | 25 | -16 | 1" | 25.4 | 38.1 | 16.5 | 65.0 | 300 | S03310-16 |
| 2SN20 | 32 | -20 | 1.1/4" | 31.8 | 48.3 | 12.5 | 50.0 | 420 | S03310-20 |
| 2SN24 | 38 | -24 | 1.1/2" | 38.1 | 54.6 | 9.0 | 36.0 | 500 | S03310-24 |
| 2SN32 | 51 | -32 | 2" | 50.8 | 67.4 | 8.0 | 32.0 | 630 | S03310-32 |

钢丝缠绕软管 Four Steel Wire Spiral Hose (GB/T10544 4SP-EN 856 4SP)

内衬层 Inner Tube: 耐油合成橡胶 Oil Resistant Synthetic Rubber

增强层 Reinforcement: 4层钢丝缠绕增强层 Four Steel Wire Spirals Reinforcement

外覆层 Cover: 耐油耐恶劣天气合成橡胶 Oil And Weather Resistant Synthetic

温度范围 Temperature Range: -40°C ~ +100°C

可用接头芯 Insert: xxxx2-xx-xx 系列 xxxx2-xx-xx Series



钢丝缠绕软管 Four Steel Wire Spiral Hose (GB/T10544 4SH-EN 856 4SH)

内衬层 Inner Tube: 耐油合成橡胶 Oil Resistant Synthetic Rubber

增强层 Reinforcement: 4层高强度钢丝缠绕增强层 Four High Tensile Steel Spirals Reinforcement

外覆层 Cover: 耐油耐恶劣天气合成橡胶 Oil And Weather Resistant Synthetic

温度范围 Temperature Range: -40°C ~ +100°C

可用接头芯 Insert: xxxx2-xx-xx 系列 xxxx2-xx-xx Series



| 软管代号 | 公称内径 | 软管尺寸 | | 软管内径 | 软管外径 | 最大工作压力 | 最小爆破压力 | 最小弯曲半径 | 配用套筒 |
|----------|------|-----------|--------|-----------|-----------|----------|--------------------|-----------------|-----------|
| HOSE | DN | HOSE SIZE | | HOSE I.D. | HOSE O.D. | MAX W.P. | MIN.BURST PRESSURE | MIN.BEND.RADIUS | FERRULE |
| PART NO. | mm | DASH | Inch | mm | mm | MPa | MPa | mm | |
| 4SH12 | 19 | -12 | 3/4" | 19 | 32.2 | 42.0 | 168.0 | 280 | S00400-12 |
| 4SH16 | 25 | -16 | 1" | 25.4 | 38.7 | 38.0 | 152.0 | 340 | S00400-16 |
| 4SH20 | 32 | -20 | 1.1/4" | 31.8 | 45.5 | 32.5 | 130.0 | 460 | S00401-20 |
| 4SH24 | 38 | -24 | 1.1/2" | 38.1 | 53.5 | 29.0 | 116.0 | 560 | S00401-24 |
| 4SH32 | 51 | -32 | 2" | 50.8 | 68.1 | 25.0 | 100.0 | 700 | S00401-32 |

钢丝缠绕软管 Multiple Steel Wire Spiral Hose (GB/T10544 R15-SAE 100 R15-EN 856 R15)

内衬层 Inner Tube: 耐油合成橡胶 Oil Resistant Synthetic Rubber

增强层 Reinforcement: 多层高强度钢丝缠绕增强层 Multiple High Tensile Steel Spirals Reinforcement

外覆层 Cover: 耐油耐恶劣天气合成橡胶 Oil And Weather Resistant Synthetic

温度范围 Temperature Range: -40°C ~ +100°C

可用接头芯 Insert: xxxx3-xx-xx 系列 xxxx3-xx-xx Series



钢丝缠绕软管 Multiple Steel Wire Spiral Hose (GB/T10544 R13-SAE 100 R13-EN 856 R13)


内衬层 Inner Tube: 耐油合成橡胶 Oil Resistant Synthetic Rubber

增强层 Reinforcement: 多层高强度钢丝缠绕增强层 Multiple High Tensile Steel Spirals Reinforcement

外覆层 Cover: 耐油耐恶劣天气合成橡胶 Oil And Weather Resistant Synthetic

温度范围 Temperature Range: -40°C ~ +121°C

可用接头芯 Insert: xxxx3-xx-xx 系列 xxxx3-xx-xx Series;



| 软管代号 | 公称内径 | 软管尺寸 | | 软管内径 | 软管外径 | 最大工作压力 | 最小爆破压力 | 最小弯曲半径 | 配用套筒 |
|----------|------|-----------|--------|-----------|-----------|----------|--------------------|-----------------|-----------|
| HOSE | DN | HOSE SIZE | | HOSE I.D. | HOSE O.D. | MAX W.P. | MIN.BURST PRESSURE | MIN.BEND.RADIUS | FERRULE |
| PART NO. | mm | DASH | Inch | mm | mm | MPa | MPa | mm | |
| R1312 | 19 | -12 | 3/4" | 19 | 32.1 | 34.5 | 137.9 | 241 | S00621-12 |
| R1316 | 25 | -16 | 1" | 25.4 | 38.7 | 34.5 | 137.9 | 305 | S00621-16 |
| R1320 | 32 | -20 | 1.1/4" | 31.8 | 49.8 | 34.5 | 137.9 | 419 | S00621-20 |
| R1324 | 38 | -24 | 1.1/2" | 38.1 | 57.3 | 34.5 | 137.9 | 508 | S00621-24 |
| R1332 | 51 | -32 | 2" | 50.8 | 71.8 | 34.5 | 137.9 | 635 | S00621-32 |

树脂软管 Two Polyester Braid Hose (SAE 100R7-EN855 R7)

内衬层 Inner Tube: 热塑性塑料聚脂 Thermoplastic Polyester

增强层 Reinforcement: 2层高强度聚酯编织增强层 Two High Tenacity Polyester Braids Reinforcement

外覆层 Cover:

耐油耐恶劣天气耐摩擦耐臭氧聚氨酯

Oil, Fuel, Weather, Ozone And Abrasion Resistant Thermoplastic Polyurethane

温度范围 Temperature Range: -40°C ~ +93°C


可用接头芯 Insert: xxxx1S-xx-xx 系列 xxxx1S-xx-xx Series



套筒 FERRULE


套筒
Ferrule

套筒

S00018

SAE 100 R7/R8软管套筒
FERRULE FOR SAE1000R7/R8 HOSE

| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|------|
| | 公称内径 DN | 标号 DASH | L | D |
| S00018-02 | 4 | 02 | 25 | 13.5 |
| S00018-03 | 5 | 03 | 27 | 15 |
| S00018-04 | 6 | 04 | 30 | 18 |
| S00018-04A | 6 | 04 | 29 | 14 |
| S00018-05 | 8 | 05 | 30 | 18.8 |
| S00018-06 | 10 | 06 | 34 | 21 |
| S00018-08 | 13 | 08 | 34 | 25.5 |
| S00018-08A | 13 | 08 | 34 | 27.2 |
| S00018-10 | 16 | 10 | 37 | 31.5 |
| S00018-10A | 16 | 10 | 37 | 28.6 |
| S00018-12 | 19 | 12 | 43 | 33 |

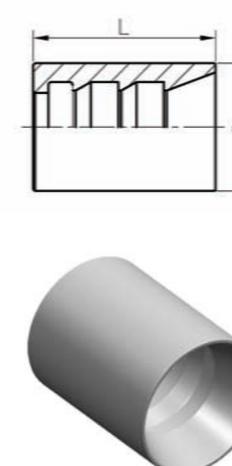
S00100

GB 3863 1型、DIN 20022 1ST、SAE 100R1A软管套筒
For GB 3863 1 TYPE、DIN 20022 1ST、SAE 100R1A HOSE FERRULE

| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|------|
| | 公称内径 DN | 标号 DASH | L | D |
| S00100-04 | 6 | 04 | 30 | 20 |
| S00100-05 | 8 | 05 | 31 | 21 |
| S00100-06 | 10 | 06 | 32 | 23 |
| S00100-08 | 13 | 08 | 34 | 28.5 |
| S00100-10 | 16 | 10 | 37 | 32 |
| S00100-12 | 19 | 12 | 42 | 35 |
| S00100-16 | 25 | 16 | 50 | 43 |
| S00100-20 | 32 | 20 | 59 | 50.5 |
| S00100-24 | 38 | 24 | 72 | 57 |
| S00100-32 | 51 | 32 | 74 | 70 |

S00200


GB 3863 2型、DIN 20022 2ST、SAE 100R2A软管套筒
For GB 3863 2 TYPE、DIN 20022 2ST、SAE 100R2A HOSE FERRULE



| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|------|
| | 公称内径 DN | 标号 DASH | L | D |
| S00200-04 | 6 | 04 | 30 | 21 |
| S00200-05 | 8 | 05 | 31 | 22.5 |
| S00200-06 | 10 | 06 | 32 | 24 |
| S00200-08 | 13 | 08 | 34 | 28.7 |
| S00200-10 | 16 | 10 | 37 | 31.5 |
| S00200-12 | 19 | 12 | 43 | 36 |
| S00200-16 | 25 | 16 | 50 | 44 |
| S00200-20 | 32 | 20 | 59 | 54.5 |
| S00200-24 | 38 | 24 | 74 | 62 |
| S00200-32 | 51 | 32 | 78 | 75 |

S00210

GB 3863 2型、DIN 20022 2SN、SAE 100R2AT软管套筒
For GB 3863 2 TYPE、DIN 20022 2SN、SAE 100R2AT HOSE FERRULE




| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|----|
| | 公称内径 DN | 标号 DASH | D | L |
| S00210-04 | 6 | 04 | 22.3 | 30 |
| S00210-05 | 8 | 05 | 23 | 31 |
| S00210-06 | 10 | 06 | 25 | 32 |
| S00210-08 | 13 | 08 | 28.7 | 34 |
| S00210-10 | 16 | 10 | 31.5 | 37 |
| S00210-12 | 19 | 12 | 35.5 | 43 |
| S00210-16 | 25 | 16 | 45 | 50 |
| S00210-20 | 32 | 20 | 55 | 59 |
| S00210-24 | 38 | 24 | 62.5 | 74 |
| S00210-32 | 51 | 32 | 75.5 | 78 |

注:不推荐用于工程机械类。 Don't recommend for engineering machineries

S00110-A


改进型 SAE 100R1AT/DIN20022 1SN软管套筒
FERRULE FOR SAE 100R1AT/DIN20022 1SN HOSE



| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|------|
| | 公称内径 DN | 标号 DASH | L | D |
| S00110-04A | 6 | 04 | 30 | 21 |
| S00110-05A | 8 | 05 | 31 | 21.8 |
| S00110-06A | 10 | 06 | 32 | 24.3 |
| S00110-08A | 13 | 08 | 34 | 28.4 |
| S00110-10A | 16 | 10 | 37 | 31 |
| S00110-12A | 19 | 12 | 43 | 35.5 |
| S00110-16A | 25 | 16 | 50 | 44 |
| S00110-20A | 32 | 20 | 59 | 53 |
| S00110-24A | 38 | 24 | 74 | 59.3 |
| S00110-32A | 51 | 32 | 77 | 73.5 |

S00110


SAE 100R1AT/DIN20022 1SN软管套筒
FERRULE FOR SAE 100R1AT/DIN20022 1SN HOSE




| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|------|
| | 公称内径 DN | 标号 DASH | L | D |
| S00110-04 | 6 | 04 | 30 | 20.6 |
| S00110-05 | 8 | 05 | 31 | 20.8 |
| S00110-06 | 10 | 06 | 32 | 23.3 |
| S00110-08 | 13 | 08 | 34 | 27 |
| S00110-10 | 16 | 10 | 37 | 30 |
| S00110-12 | 19 | 12 | 43 | 34 |
| S00110-16 | 25 | 16 | 50 | 42.6 |
| S00110-20 | 32 | 20 | 59 | 52 |
| S00110-24 | 38 | 24 | 74 | 58 |
| S00110-32 | 51 | 32 | 78 | 72 |

S03310

SAE 100R1AT/R2AT、DIN 20022 1SN/2SN软管套筒
FERRULE FOR SAE R1AT/R2AT、DIN 20022 2SN HOSE




| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|----|
| | 公称内径 DN | 标号 DASH | D | L |
| S03310-04 | 6 | 04 | 23.2 | 30 |
| S03310-05 | 8 | 05 | 24 | 30 |
| S03310-06 | 10 | 06 | 26.3 | 32 |
| S03310-08 | 13 | 08 | 29.9 | 34 |
| S03310-10 | 16 | 10 | 33.2 | 36 |
| S03310-12 | 19 | 12 | 37.8 | 42 |
| S03310-16 | 25 | 16 | 46.9 | 50 |
| S03310-20 | 32 | 20 | 59 | 59 |
| S03310-24 | 38 | 24 | 67 | 72 |
| S03310-32 | 51 | 32 | 80 | 75 |

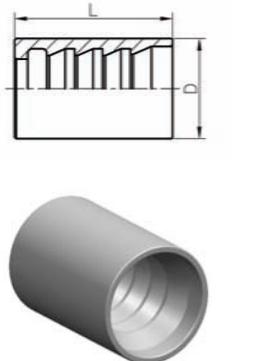S01100


国产一层钢丝编织软管套筒
FERRULE FOR CHINA STANDARD 1-STEEL WIRE BRAID HOSE

| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|----|
| | 公称内径 DN | 标号 DASH | L | D |
| S01100-04 | 6 | 04 | 30 | 19 |
| S01100-05 | 8 | 05 | 32 | 21 |
| S01100-06 | 10 | 06 | 32 | 23 |
| S01100-08 | 13 | 08 | 34 | 28 |
| S01100-10 | 16 | 10 | 37 | 31 |
| S01100-12 | 19 | 12 | 43 | 34 |
| S01100-16 | 25 | 16 | 50 | 41 |
| S01100-20 | 32 | 20 | 59 | 49 |
| S01100-24 | 38 | 24 | 74 | 55 |

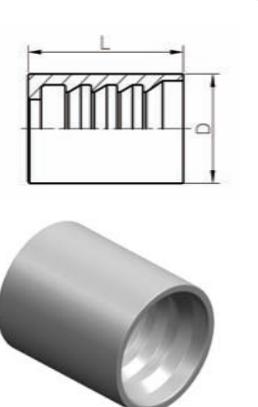S01200


国产两层钢丝编织软管套筒
FERRULE FOR CHINA STANDARD 2-STEEL WIRE BRAID HOSE

| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|----|
| | 公称内径 DN | 标号 DASH | L | D |
| S01200-04 | 6 | 04 | 30 | 21 |
| S01200-05 | 8 | 05 | 31 | 23 |
| S01200-06 | 10 | 06 | 32 | 25 |
| S01200-08 | 13 | 08 | 34 | 31 |
| S01200-10 | 16 | 10 | 39 | 34 |
| S01200-12 | 19 | 12 | 43 | 37 |
| S01200-16 | 25 | 16 | 50 | 43 |
| S01200-20 | 32 | 20 | 59 | 51 |
| S01200-24 | 38 | 24 | 74 | 57 |

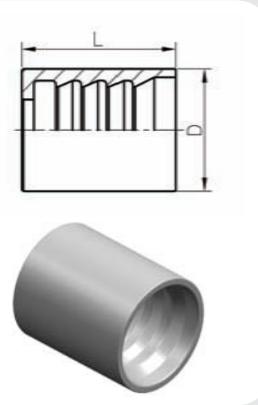S01300


国产三层钢丝编织软管套筒
FERRULE FOR CHINA STANDARD 3-STEEL WIRE BRAID HOSE

| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|------|
| | 公称内径 DN | 标号 DASH | L | D |
| S01300-05 | 8 | 05 | 32 | 25.5 |
| S01300-08 | 13 | 08 | 34 | 33 |
| S01300-10 | 16 | 10 | 39 | 36 |
| S01300-12 | 19 | 12 | 43 | 39 |
| S01300-16 | 25 | 16 | 50 | 45 |
| S01300-20 | 32 | 20 | 59 | 53 |
| S01300-24 | 38 | 24 | 74 | 59 |
| S01300-32 | 51 | 32 | 78 | 72 |

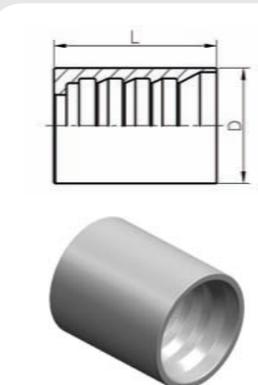S01400


SAE 100 R12/20-24, GB 10544 5型软管套筒
FERRULE FOR SAE 100 R12/20-24, GB 10544 5TYPE HOSE

| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|------|
| | 公称内径 DN | 标号 DASH | L | D |
| S01400-06 | 10 | 06 | 39 | 27.5 |
| S01400-08 | 13 | 08 | 41 | 31.5 |
| S01400-10 | 16 | 10 | 43 | 34 |
| S01400-12 | 19 | 12 | 51 | 39 |
| S01400-16 | 25 | 16 | 61.5 | 46.5 |
| S01400-20 | 32 | 20 | 67.5 | 55.5 |
| S01400-24 | 38 | 24 | 75 | 63.5 |
| S01400-32 | 51 | 32 | 79 | 78 |

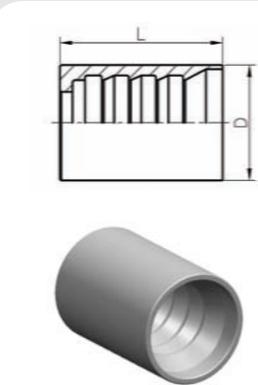S00400

SAE 100 R12/06-16, GB 10544 3型/20-32, DIN 20023-4SP, 4SH/10-16软管套筒
FERRULE For SAE 100 R12/06-16, GB 10544 3TYPE/20-32, DIN 20023-4SP, 4SH/10-16 HOSE


| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|------|
| | 公称内径 DN | 标号 DASH | L | D |
| S00400-04 | 6 | 04 | 37.5 | 22 |
| S00400-06 | 10 | 06 | 39 | 25.5 |
| S00400-08 | 13 | 08 | 41 | 29 |
| S00400-10 | 16 | 10 | 43 | 34 |
| S00400-12 | 19 | 12 | 51 | 37 |
| S00400-16 | 25 | 16 | 61.5 | 46.5 |
| S00400-20 | 32 | 20 | 67.5 | 57 |
| S00400-24 | 38 | 24 | 75 | 65 |
| S00400-32 | 51 | 32 | 79 | 79 |

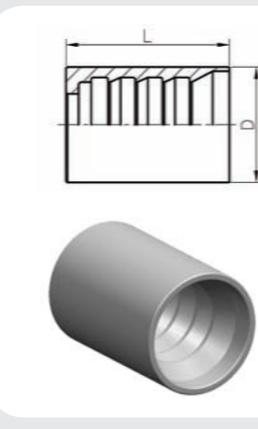S00401

DIN 20023-4SH 软管套筒
FERRULE FOR DIN 20023-4SH HOSE

| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|----|
| | 公称内径 DN | 标号 DASH | L | D |
| S00401-20 | 32 | 20 | 67.5 | 53 |
| S00401-24 | 38 | 24 | 75 | 61 |
| S00401-32 | 51 | 32 | 79 | 77 |

ID

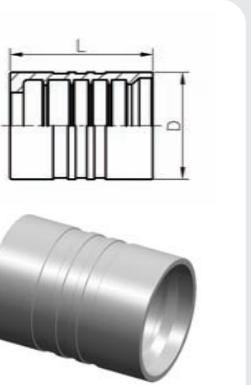S00621

SAE 100 R13/R15、4SH/12-16 软管剥内外胶套筒
INTERLOCK FERRULE FOR SAE 100R13/R15、4SH/12-16 HOSE

| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|--------------|---------|---------------|-------|
| | 公称内径 DN | 标号 DASH | L | D |
| S00621-12 | 19 | 12 | 53 | 39.5 |
| S00621-16 | 25 | 15 | 66 | 48.5 |
| S00621-20 | 32 | 20 | 88 | 59 |
| S00621-24 | 38 | 24 | 102 | 69.3 |
| S00621-32 | 51 | 32 | 106 | 84.45 |

C


套筒

扫描获取三柯名片




软管接头

Hydraulic Hose Fitting

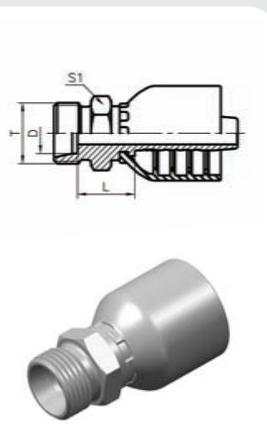S10411-RW公制外螺纹24° 内锥面轻系列
METRIC MALE 24° CONE SEAT L.T.ISO 84341-1-DIN3861


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D. | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|-------------------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | | L | D | S1 |
| S10411-12-04RW | M12X1.5 | 6 | 04 | 6 | 13.5 | 6 | 14 |
| S10411-14-04RW | M14X1.5 | 6 | 04 | 8 | 13.5 | 8 | 17 |
| S10411-14-05RW | M14X1.5 | 8 | 05 | 8 | 14.5 | 8 | 17 |
| S10411-16-04RW | M16X1.5 | 6 | 04 | 10 | 16.5 | 10 | 17 |
| S10411-16-05RW | M16X1.5 | 8 | 05 | 10 | 16.5 | 10 | 17 |
| S10411-16-06RW | M16X1.5 | 10 | 06 | 10 | 16.5 | 10 | 17 |
| S10411-18-05RW | M18X1.5 | 8 | 05 | 12 | 16.5 | 12 | 19 |
| S10411-18-06RW | M18X1.5 | 10 | 06 | 12 | 16.5 | 12 | 19 |
| S10411-22-06RW | M22X1.5 | 10 | 06 | 15 | 17.5 | 15 | 24 |
| S10411-22-08RW | M22X1.5 | 13 | 08 | 15 | 18 | 15 | 24 |
| S10411-26-08RW | M26X1.5 | 13 | 08 | 18 | 19 | 18 | 27 |
| S10411-26-10RW | M26X1.5 | 16 | 10 | 18 | 19.5 | 18 | 27 |
| S10411-30-10RW | M30X2 | 16 | 10 | 22 | 22.5 | 22 | 32 |
| S10411-30-12RW | M30X2 | 19 | 12 | 22 | 22.5 | 22 | 32 |
| S10411-36-16RW | M36X2 | 25 | 16 | 28 | 25.5 | 28 | 41 |
| S10411-45-20RW | M45X2 | 32 | 20 | 35 | 27.5 | 35 | 46 |
| S10411-52-24RW | M52X2 | 38 | 24 | 42 | 27.5 | 42 | 55 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S10412-XX-XXRW
Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S10412-XX-XXRW.

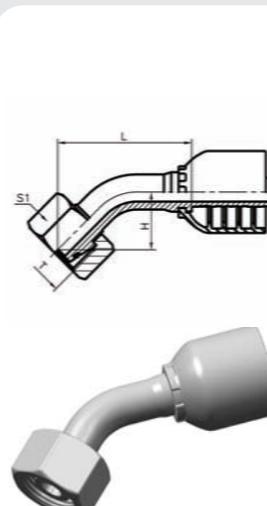S20441-TRW45°弯公制内螺纹24° 锥带O形圈轻系列
45° METRIC FEMALE 24° CONE O-RING L.T. ISO 12151-2-DIN 3865


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子直径 TUBE O.E. | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|-------------------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20441-14-04TRW | M14X1.5 | 6 | 04 | 8 | 39 | 17 | 17 |
| S20441-16-04TRW | M16X1.5 | 6 | 04 | 10 | 39 | 19 | 19 |
| S20441-16-05TRW | M16X1.5 | 8 | 05 | 10 | 45 | 21.5 | 19 |
| S20441-18-05TRW | M18X1.5 | 8 | 05 | 12 | 46 | 22 | 22 |
| S20441-18-06TRW | M18X1.5 | 10 | 06 | 12 | 48 | 22.2 | 22 |
| S20441-22-08TRW | M22X1.5 | 13 | 08 | 15 | 57 | 25 | 27 |
| S20441-26-08TRW | M26X1.5 | 13 | 08 | 18 | 60.5 | 27.9 | 32 |
| S20441-26-10TRW | M26X1.5 | 16 | 10 | 18 | 68.5 | 29 | 32 |
| S20441-30-10TRW | M30X2 | 16 | 10 | 22 | 68 | 28.5 | 36 |
| S20441-30-12TRW | M30X2 | 19 | 12 | 22 | 74 | 31.5 | 36 |
| S20441-36-12TRW | M36X2 | 19 | 12 | 28 | 76.5 | 33.7 | 41 |
| S20441-36-16TRW | M36X2 | 25 | 16 | 28 | 88 | 35 | 41 |
| S20441-45-16TRW | M45X2 | 25 | 16 | 35 | 88 | 35 | 50 |
| S20441-45-20TRW | M45X2 | 32 | 20 | 35 | 98 | 39.1 | 50 |
| S20441-52-20TRW | M52X2 | 32 | 20 | 42 | 100 | 39.1 | 60 |
| S20441-52-24TRW | M52X2 | 38 | 24 | 42 | 115 | 45.3 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20442-XX-XXTRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20442-XX-XXTRW

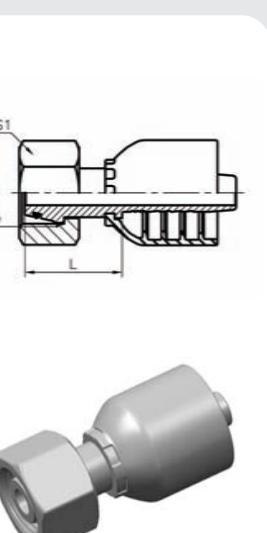
S20411-TRW公制内螺纹24° 锥带O形圈轻系列
METRIC FEMALE 24° CONE O-RING L.T. ISO 12151-2—DIN 3865

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子直径 TUBE O.E. | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|-------------------|---------------|---|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20411-12-04RW | M12X1.5 | 6 | 04 | 6 | 26 | | 17 |
| S20411-14-04TRW | M14X1.5 | 6 | 04 | 8 | 23.5 | | 17 |
| S20411-16-04TRW | M16X1.5 | 6 | 04 | 10 | 20.5 | | 19 |
| S20411-16-05TRW | M16X1.5 | 8 | 05 | 10 | 25.5 | | 19 |
| S20411-18-05TRW | M18X1.5 | 8 | 05 | 12 | 23.5 | | 22 |
| S20411-18-06TRW | M18X1.5 | 10 | 06 | 12 | 26.5 | | 22 |
| S20411-22-08TRW | M22X1.5 | 13 | 08 | 15 | 28.5 | | 27 |
| S20411-26-08TRW | M26X1.5 | 13 | 08 | 18 | 30 | | 32 |
| S20411-26-10TRW | M26X1.5 | 16 | 10 | 18 | 32 | | 32 |
| S20411-30-10TRW | M30X2 | 16 | 10 | 22 | 32.5 | | 36 |
| S20411-30-12TRW | M30X2 | 19 | 12 | 22 | 33.5 | | 36 |
| S20411-36-12TRW | M36X2 | 19 | 12 | 28 | 35 | | 41 |
| S20411-36-16TRW | M36X2 | 25 | 16 | 28 | 36 | | 41 |
| S20411-45-16TRW | M45X2 | 25 | 16 | 35 | 34 | | 50 |
| S20411-45-20TRW | M45X2 | 32 | 20 | 35 | 35 | | 50 |
| S20411-52-20TRW | M52X2 | 32 | 20 | 42 | 38 | | 60 |
| S20411-52-24TRW | M52X2 | 38 | 24 | 42 | 38 | | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20412-XX-XXTRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20412-XX-XXTRW.

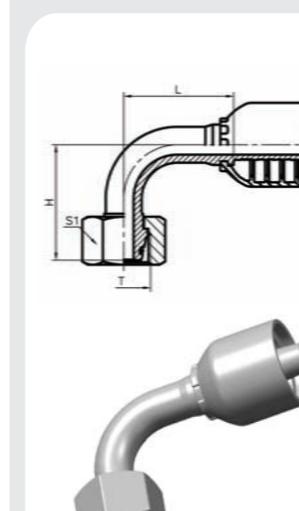
S20491-TRW90°弯公制内螺纹24° 锥带O形圈轻系列
90° METRIC FEMALE 24° CONE O-RING L.T.ISO 12151-2-DIN 3865

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子直径 TUBE O.E. | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|-------------------|---------------|---|------|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20491-14-04TRW | M14X1.5 | 6 | 04 | 8 | 32 | | 17 |
| S20491-16-04TRW | M16X1.5 | 6 | 04 | 10 | 32 | | 33.5 |
| S20491-16-05TRW | M16X1.5 | 8 | 05 | 10 | 33 | | 39 |
| S20491-18-05TRW | M18X1.5 | 8 | 05 | 12 | 33 | | 40 |
| S20491-18-06TRW | M18X1.5 | 10 | 06 | 12 | 36.5 | | 42 |
| S20491-22-08TRW | M22X1.5 | 13 | 08 | 15 | 43.5 | | 48 |
| S20491-26-08TRW | M26X1.5 | 13 | 08 | 18 | 43.5 | | 52 |
| S20491-26-10TRW | M26X1.5 | 16 | 10 | 18 | 55 | | 56.5 |
| S20491-30-10TRW | M30X2 | 16 | 10 | 22 | 55 | | 56 |
| S20491-30-12TRW | M30X2 | 19 | 12 | 22 | 64 | | |

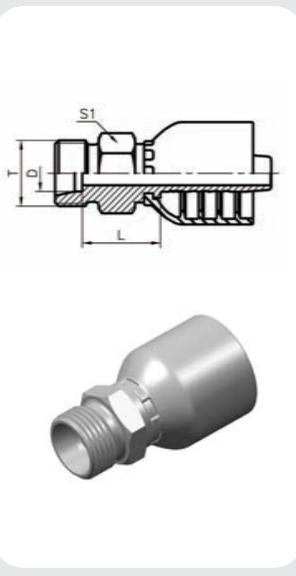S10511-RW公制外螺纹24° 内锥面重系列
METRIC MALE 24° CONE SEAT H.T. ISO 84341-1-DIN3861


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子直径 TUBE O.D. | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|-------------------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | | L | D | S1 |
| S10511-14-04RW | M14X1.5 | 6 | 04 | 6 | 24 | 6 | 14 |
| S10511-16-04RW | M16X1.5 | 6 | 04 | 8 | 26.5 | 8 | 17 |
| S10511-18-04RW | M18X1.5 | 6 | 04 | 10 | 26.5 | 10 | 19 |
| S10511-18-06RW | M18X1.5 | 10 | 06 | 10 | 27 | 10 | 19 |
| S10511-20-05RW | M20X1.5 | 8 | 05 | 12 | 28 | 12 | 22 |
| S10511-20-06RW | M20X1.5 | 10 | 06 | 12 | 28 | 12 | 22 |
| S10511-22-06RW | M22X1.5 | 10 | 06 | 14 | 28.5 | 14 | 24 |
| S10511-24-08RW | M24X1.5 | 13 | 08 | 16 | 32 | 16 | 27 |
| S10511-30-10RW | M30X2 | 16 | 10 | 20 | 36 | 20 | 32 |
| S10511-30-12RW | M30X2 | 19 | 12 | 20 | 36 | 20 | 32 |
| S10511-36-12RW | M36X2 | 19 | 12 | 25 | 40 | 25 | 41 |
| S10511-36-16RW | M36X2 | 25 | 16 | 25 | 41 | 25 | 41 |
| S10511-42-16RW | M42X2 | 25 | 16 | 30 | 43 | 30 | 46 |
| S10511-52-20RW | M52X2 | 32 | 20 | 38 | 48 | 38 | 55 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S10512-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S10512-XX-XXRW.

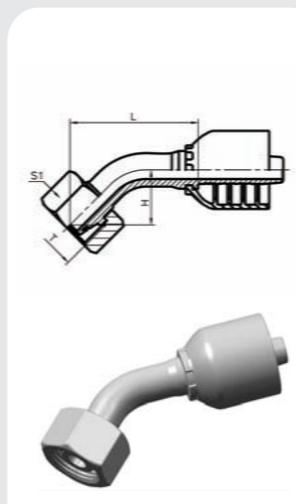S20541-TRW45° 弯公制内螺纹24° 锥带O形圈重系列
45° METRIC FEMALE 24° CONE O-RING H.T. ISO 12151-2-DIN 3865


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子直径 TUBE O.E. | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|-------------------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20541-16-04TRW | M16X1.5 | 6 | 04 | 8 | 37 | 20 | 19 |
| S20541-18-04TRW | M18X1.5 | 6 | 04 | 10 | 42 | 18.6 | 22 |
| S20541-18-05TRW | M18X1.5 | 8 | 05 | 10 | 47.2 | 23.2 | 22 |
| S20541-18-06TRW | M18X1.5 | 10 | 06 | 10 | 49.2 | 23.5 | 22 |
| S20541-20-05TRW | M20X1.5 | 8 | 05 | 12 | 47.2 | 23.2 | 24 |
| S20541-20-06TRW | M20X1.5 | 10 | 06 | 12 | 50 | 24 | 24 |
| S20541-22-06TRW | M22X1.5 | 10 | 06 | 14 | 49.5 | 23.5 | 27 |
| S20541-24-08TRW | M24X1.5 | 13 | 08 | 16 | 59 | 26.5 | 30 |
| S20541-30-10TRW | M30X2 | 16 | 10 | 20 | 69 | 29.6 | 36 |
| S20541-30-12TRW | M30X2 | 19 | 12 | 20 | 76 | 33.3 | 36 |
| S20541-36-12TRW | M36X2 | 19 | 12 | 25 | 76 | 33 | 46 |
| S20541-36-16TRW | M36X2 | 25 | 16 | 25 | 88 | 34.3 | 46 |
| S20541-42-16TRW | M42X2 | 25 | 16 | 30 | 88 | 35.1 | 50 |
| S20541-52-20TRW | M52X2 | 32 | 20 | 38 | 100 | 39.4 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20542-XX-XXTRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20542-XX-XXTRW.

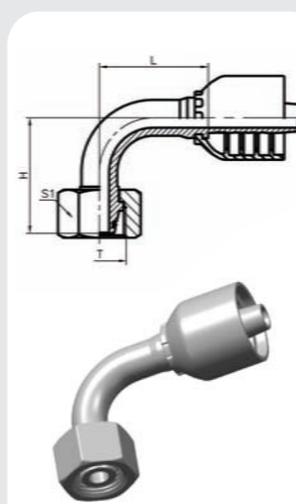S20511-TRW公制内螺纹24° 锥带O形圈重系列
METRIC FEMALE 24° CONE O-RING H.T. ISO 12151-2-DIN 3865

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子直径 TUBE O.E. | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|-------------------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | | L | | S1 |
| S20511-16-04TRW | M16X1.5 | 6 | 04 | 8 | 24 | | 19 |
| S20511-18-04TRW | M18X1.5 | 6 | 04 | 10 | 25 | | 22 |
| S20511-18-05TRW | M18X1.5 | 8 | 05 | 10 | 25 | | 22 |
| S20511-18-06TRW | M18X1.5 | 10 | 06 | 10 | 25 | | 22 |
| S20511-20-05TRW | M20X1.5 | 8 | 05 | 12 | 25.5 | | 24 |
| S20511-20-06TRW | M20X1.5 | 10 | 06 | 12 | 25.5 | | 24 |
| S20511-22-06TRW | M22X1.5 | 10 | 06 | 14 | 25.5 | | 27 |
| S20511-24-08TRW | M24X1.5 | 13 | 08 | 16 | 30 | | 30 |
| S20511-30-10TRW | M30X2 | 16 | 10 | 20 | 34 | | 36 |
| S20511-30-12TRW | M30X2 | 19 | 12 | 20 | 35 | | 36 |
| S20511-36-12TRW | M36X2 | 19 | 12 | 25 | 32 | | 46 |
| S20511-36-16TRW | M36X2 | 25 | 16 | 25 | 35.5 | | 46 |
| S20511-42-16TRW | M42X2 | 25 | 16 | 30 | 36 | | 50 |
| S20511-52-20TRW | M52X2 | 32 | 20 | 38 | 36 | | 60 |


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20512-XX-XXTRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20512-XX-XXTRW.

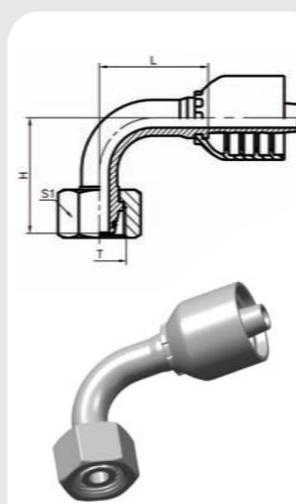S20591-TRW90° 弯公制内螺纹24° 锥带O形圈重系列
90° METRIC FEMALE 24° CONE O-RING H.T. ISO 12151-2-DIN 3865

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子直径 TUBE O.E. | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|-------------------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20591-16-04TRW | M16X1.5 | 6 | 04 | 8 | 32 | 32 | 19 |
| S20591-18-04TRW | M18X1.5 | 6 | 04 | 10 | 32 | 36.5 | 22 |
| S20591-18-05TRW | M18X1.5 | 8 | 05 | 10 | 33 | 38 | 22 |
| S20591-18-06TRW | M18X1.5 | 10 | 06 | 10 | 36.5 | 43.5 | 22 |
| S20591-20-05TRW | M20X1.5 | 8 | 05 | 12 | 33 | 42 | 24 |
| S20591-20-06TRW | M20X1.5 | 10 | 06 | 12 | 36.5 | 44 | 24 |
| S20591-22-06TRW | M22X1.5 | 10 | 06 | 14 | 36.5 | 44 | 27 |
| S20591-24-08TRW | M24X1.5 | 13 | 08 | 16 | 43.5 | 50.5 | 30 |
| S20591-30-10TRW | M30X2 | 16 | 10 | 20 | 55 | 57 | 36 |
| S20591-30-12TRW | M30X2 | 19 | 12 | 20 | 64 | 65 | 36 |
| S20591-36-12TRW | M36X2 | 19 | 12 | 25 | 64 | 66 | 46 |
| S20591-36-16TRW | M36X2 | 25 | 16 | 25 | 74 | 73 | 46 |
| S20591-42-16TRW | M42X2 | 25 | 16 | 30 | 74 | 74 | 50 |
| S20591-52-20TRW | M52X2 | 32 | 20 | 38 | 91.5 | 86.5 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20592-XX-XXTRW。Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20592-XX-XXTRW.

S12611A-RW

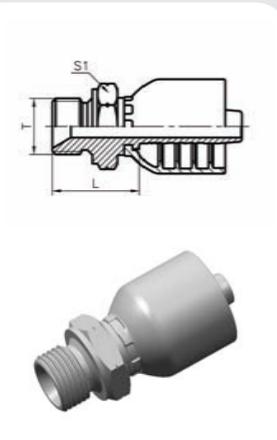


英管外螺纹60° 内锥面或六角端面组合垫密封的双用接头
BSP MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL

| 代号 PART NO. | 螺纹 T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|-----------------|------------------|--------------|---------|---------------|----|
| | | 公称内径DN | 标号 DASH | L | S1 |
| S12611A-04-04RW | G1/4"X19 | 6 | 04 | 25.5 | 19 |
| S12611A-06-05RW | G3/8"X19 | 8 | 05 | 27.5 | 22 |
| S12611A-06-06RW | G3/8"X19 | 10 | 06 | 26 | 22 |
| S12611A-06-08RW | G3/8"X19 | 13 | 08 | 28 | 22 |
| S12611A-08-06RW | G1/2"X14 | 10 | 06 | 32 | 27 |
| S12611A-08-08RW | G1/2"X14 | 13 | 08 | 33 | 27 |
| S12611A-08-10RW | G1/2"X14 | 16 | 10 | 34 | 27 |
| S12611A-10-08RW | G5/8"X14 | 13 | 08 | 36 | 30 |
| S12611A-10-10RW | G5/8"X14 | 16 | 10 | 37 | 30 |
| S12611A-12-08RW | G3/4"X14 | 13 | 08 | 35 | 32 |
| S12611A-12-10RW | G3/4"X14 | 16 | 10 | 36 | 32 |
| S12611A-12-12RW | G3/4"X14 | 19 | 12 | 37 | 32 |
| S12611A-16-12RW | G1"X11 | 19 | 12 | 39 | 41 |
| S12611A-16-16RW | G1"X11 | 25 | 16 | 42 | 41 |
| S12611A-20-16RW | G1. 1/4"X11 | 25 | 16 | 45 | 50 |
| S12611A-20-20RW | G1. 1/4"X11 | 32 | 20 | 45 | 50 |
| S12611A-24-20RW | G1. 1/2"X11 | 32 | 20 | 49 | 55 |
| S12611A-24-24RW | G1. 1/2"X11 | 38 | 24 | 49 | 55 |
| S12611A-32-32RW | G2"X11 | 51 | 32 | 54.5 | 70 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S12612A-XX-XXRW Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S12612A-XX-XXRW.

S22641-RW

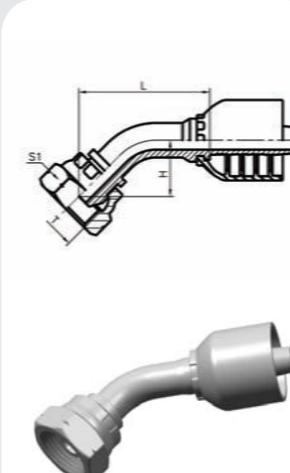


45° 英管内螺纹 60° 外锥面
45° BSP FEMALE 60° CONE

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|-----------------|--------------|---------|---------------|------|
| | | 公称内径DN | 标号 DASH | L | H |
| S22641-04-04RW | G1/4"X19 | 6 | 04 | 42.3 | 20.2 |
| S22641-04-05RW | G1/4"X19 | 8 | 05 | 46 | 22 |
| S22641-06-04RW | G3/8"X19 | 6 | 04 | 43.2 | 18.8 |
| S22641-06-05RW | G3/8"X19 | 8 | 05 | 46 | 22 |
| S22641-06-06RW | G3/8"X19 | 10 | 06 | 48 | 22 |
| S22641-06-08RW | G3/8"X19 | 13 | 08 | 57 | 24.5 |
| S22641-08-08RW | G1/2"X14 | 13 | 08 | 58.5 | 26 |
| S22641-10-08RW | G5/8"X14 | 13 | 08 | 59 | 26.5 |
| S22641-10-10RW | G5/8"X14 | 16 | 10 | 71 | 27.8 |
| S22641-12-10RW | G3/4"X14 | 16 | 10 | 68.5 | 28.8 |
| S22641-12-12RW | G3/4"X14 | 19 | 12 | 74.5 | 32 |
| S22641-16-16RW | G1"X11 | 25 | 16 | 87 | 34 |
| S22641-20-20RW | G1. 1/4"X11 | 32 | 20 | 101 | 40 |
| S22641-24-24RW | G1. 1/2"X11 | 38 | 24 | 117 | 47 |
| S22641-32-32RW | G2"X11 | 51 | 32 | 137 | 56.2 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22642-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22642-XX-XXRW.

S22611-RW

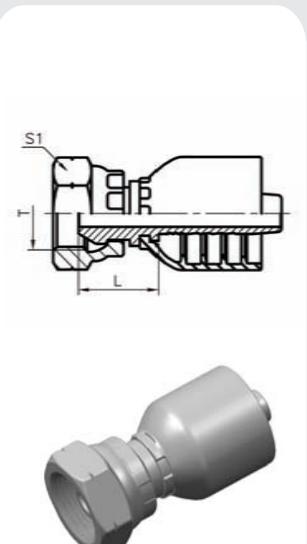


英管内螺纹 60° 外锥面
BSP FEMALE 60° CONE

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|-----------------|--------------|---------|---------------|----|
| | | 公称内径DN | 标号 DASH | L | S1 |
| S22611-02-04RW | G1/8"X28 | 6 | 04 | 15 | 14 |
| S22611-04-04RW | G1/4"X19 | 6 | 04 | 19 | 19 |
| S22611-04-05RW | G1/4"X19 | 8 | 05 | 19 | 19 |
| S22611-04-06RW | G1/4"X19 | 10 | 06 | 19 | 19 |
| S22611-06-04RW | G3/8"X19 | 6 | 04 | 19.5 | 22 |
| S22611-06-05RW | G3/8"X19 | 8 | 05 | 19 | 22 |
| S22611-06-06RW | G3/8"X19 | 10 | 06 | 19.5 | 22 |
| S22611-06-08RW | G3/8"X19 | 13 | 08 | 20 | 22 |
| S22611-08-08RW | G1/2"X14 | 13 | 08 | 21.5 | 27 |
| S22611-10-08RW | G5/8"X14 | 13 | 08 | 22.5 | 30 |
| S22611-10-10RW | G5/8"X14 | 16 | 10 | 23 | 30 |
| S22611-12-10RW | G3/4"X14 | 16 | 10 | 24 | 32 |
| S22611-12-12RW | G3/4"X14 | 19 | 12 | 24 | 32 |
| S22611-16-14RW | G1"X11 | 22 | 14 | 26 | 41 |
| S22611-16-16RW | G1"X11 | 25 | 16 | 27 | 41 |
| S22611-20-20RW | G1. 1/4"X11 | 32 | 20 | 30.5 | 50 |
| S22611-24-24RW | G1. 1/2"X11 | 38 | 24 | 31.5 | 55 |
| S22641-32-32RW | G2"X11 | 51 | 32 | 34 | 70 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22612-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22612-XX-XXRW.

S22691-RW

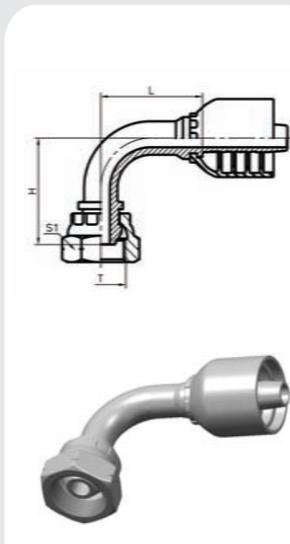


90° 弯英管内螺纹 60° 外锥面
90° BSP FEMALE 60° CONE

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|-----------------|--------------|---------|---------------|-------|
| | | 公称内径DN | 标号 DASH | L | H |
| S22691-02-04RW | G1/8"X28 | 6 | 04 | 32 | 34 |
| S22691-04-04RW | G1/4"X19 | 6 | 04 | 32 | 35 |
| S22691-04-05RW | G1/4"X19 | 8 | 05 | 33 | 40 |
| S22691-04-06RW | G1/4"X19 | 10 | 06 | 36.5 | 42 |
| S22691-06-04RW | G3/8"X19 | 6 | 04 | 32 | 35 |
| S22691-06-05RW | G3/8"X19 | 8 | 05 | 33 | 39 |
| S22691-06-06RW | G3/8"X19 | 10 | 06 | 36.5 | 42 |
| S22691-08-08RW | G1/2"X14 | 13 | 08 | 43.5 | 50 |
| S22691-10-08RW | G5/8"X14 | 13 | 08 | 43.5 | 50.5 |
| S22691-10-10RW | G5/8"X14 | 16 | 10 | 55 | 55 |
| S22691-12-10RW | G3/4"X14 | 16 | 10 | 55 | 56.5 |
| S22691-12-12RW | G3/4"X14 | 19 | 12 | 64 | 64.5 |
| S22691-16-16RW | G1"X11 | 25 | 16 | 74 | 74 |
| S22691-20-20RW | G1. 1/4"X11 | 32 | 20 | 91.5 | 90 |
| S22691-24-24RW | G1. 1/2"X11 | 38 | 24 | 109 | 105 |
| S22691-32-32RW | G2"X11 | 51 | 32 | 129 | 128.5 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22692-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22692-XX-XXRW.

S16711-RW

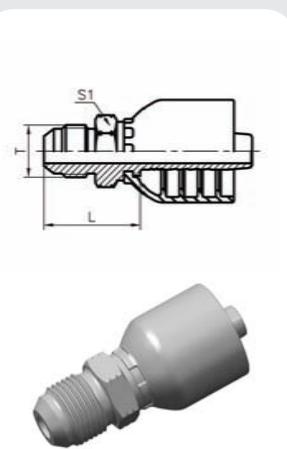


美制JIC外螺纹74° 外锥面
JIC MALE 74° CONE ISO 8434-2-SAE J514

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S16711-04-04RW | 7/16"X20 | 6 | 04 | 26.5 | | 12 |
| S16711-05-04RW | 1/2"X20 | 6 | 04 | 26.5 | | 14 |
| S16711-05-05RW | 1/2"X20 | 8 | 05 | 26.5 | | 14 |
| S16711-05-06RW | 1/2"X20 | 10 | 06 | 26.5 | | 17 |
| S16711-06-04RW | 9/16"X18 | 6 | 04 | 26.5 | | 17 |
| S16711-06-05RW | 9/16"X18 | 8 | 05 | 26.5 | | 17 |
| S16711-06-06RW | 9/16"X18 | 10 | 06 | 26.5 | | 17 |
| S16711-08-06RW | 3/4"X16 | 10 | 06 | 31 | | 22 |
| S16711-08-08RW | 3/4"X16 | 13 | 08 | 31.5 | | 22 |
| S16711-10-06RW | 7/8"X14 | 10 | 06 | 32 | | 24 |
| S16711-10-08RW | 7/8"X14 | 13 | 08 | 34.5 | | 24 |
| S16711-10-10RW | 7/8"X14 | 16 | 10 | 35.5 | | 24 |
| S16711-12-08RW | 1.1/16"X12 | 13 | 08 | 39 | | 27 |
| S16711-12-10RW | 1.1/16"X12 | 16 | 10 | 40 | | 27 |
| S16711-12-12RW | 1.1/16"X12 | 19 | 12 | 40 | | 27 |
| S16711-12-16RW | 1.1/16"X12 | 25 | 16 | 41 | | 30 |
| S16711-14-10RW | 1.3/16"X12 | 16 | 10 | 40 | | 32 |
| S16711-14-12RW | 1.3/16"X12 | 19 | 12 | 40.5 | | 32 |
| S16711-16-12RW | 1.5/16"X12 | 19 | 12 | 42.5 | | 36 |
| S16711-16-16RW | 1.5/16"X12 | 25 | 16 | 43.5 | | 36 |
| S16711-20-16RW | 1.5/8"X12 | 25 | 16 | 46 | | 46 |
| S16711-20-20RW | 1.5/8"X12 | 32 | 20 | 47.5 | | 46 |
| S16711-24-20RW | 1.7/8"X12 | 32 | 20 | 53.5 | | 50 |
| S16711-24-24RW | 1.7/8"X12 | 38 | 24 | 53 | | 50 |
| S16711-32-32RW | 2.1/2"X12 | 51 | 32 | 64 | | 65 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S16712-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S16712-XX-XXRW.

S26711-RW

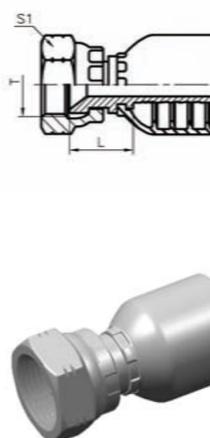


美制JIC内螺纹74° 内锥面
JIC FEMALE 74° CONE SEAT SAE J514

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S26711-04-04RW | 7/16"X20 | 6 | 04 | | | 14 |
| S26711-05-05RW | 1/2"X20 | 8 | 05 | | | 17 |
| S26711-06-05RW | 9/16"X18 | 8 | 05 | | | 19 |
| S26711-06-06RW | 9/16"X18 | 10 | 06 | | | 19 |
| S26711-08-06RW | 9/16"X18 | 13 | 08 | | | 19 |
| S26711-08-08RW | 3/4"X16 | 10 | 06 | | | 24 |
| S26711-08-08RW | 3/4"X16 | 13 | 08 | | | 24 |
| S26711-10-08RW | 7/8"X14 | 13 | 08 | | | 27 |
| S26711-10-10RW | 7/8"X14 | 16 | 10 | | | 27 |
| S26711-10-12RW | 7/8"X14 | 19 | 12 | | | 27 |
| S26711-12-10RW | 1.1/16"X12 | 16 | 10 | | | 32 |
| S26711-12-12RW | 1.1/16"X12 | 19 | 12 | | | 32 |
| S26711-14-12RW | 1.3/16"X12 | 19 | 12 | | | 36 |
| S26711-16-16RW | 1.5/16"X12 | 25 | 16 | | | 41 |
| S26711-20-20RW | 1.5/8"X12 | 32 | 20 | | | 50 |
| S26711-24-24RW | 1.7/8"X12 | 38 | 24 | | | 55 |
| S26711-32-32RW | 2.1/2"X12 | 51 | 32 | | | 75 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S26712-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S26712-XX-XXRW.


S26741-RW

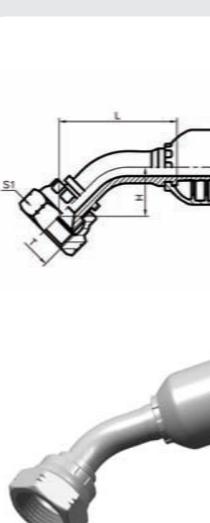

45° 弯美制JIC内螺纹74° 内锥面
45° JIC FEMALE 74° CONE SEAT SAE J514


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|-------|------|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S26741-04-04RW | 7/16"X20 | 6 | 04 | | 39 | 15.4 |
| S26741-05-05RW | 1/2"X20 | 8 | 05 | | 43 | 19.2 |
| S26741-06-05RW | 9/16"X18 | 8 | 05 | | 44 | 19.5 |
| S26741-06-06RW | 9/16"X18 | 10 | 06 | | 45.5 | 20 |
| S26741-06-08RW | 9/16"X18 | 12 | 08 | | 55 | 23 |
| S26741-08-06RW | 3/4"X16 | 10 | 06 | | 46.6 | 21 |
| S26741-08-08RW | 3/4"X16 | 13 | 08 | | 56 | 23.7 |
| S26741-10-08RW | 7/8"X14 | 13 | 08 | | 56.5 | 24 |
| S26741-10-10RW | 7/8"X14 | 16 | 10 | | 64.5 | 25.3 |
| S26741-10-12RW | 7/8"X14 | 20 | 12 | | 71 | 28.5 |
| S26741-12-10RW | 1.1/16"X12 | 16 | 10 | | 66.5 | 27.1 |
| S26741-12-12RW | 1.1/16"X12 | 19 | 12 | | 73 | 30.2 |
| S26741-14-12RW | 1.3/16"X12 | 19 | 12 | | 73 | 30.2 |
| S26741-16-16RW | 1.5/16"X12 | 25 | 16 | | 85 | 32.2 |
| S26741-20-20RW | 1.5/8"X12 | 32 | 20 | | 99 | 38.4 |
| S26741-24-24RW | 1.7/8"X12 | 38 | 24 | | 113 | 43.9 |
| S26741-32-32RW | 2.1/2"X12 | 51 | 32 | | 136.5 | 51.5 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S26742-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S26742-XX-XXRW.

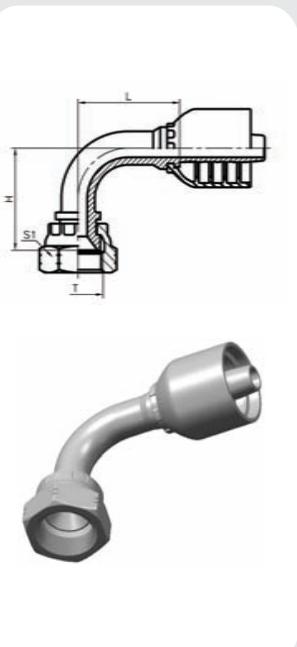S26791-RW


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|-------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S26791-04-04RW | 7/16"X20 | 6 | 04 | 30 | 29 | 14 |
| S26791-05-05RW | 1/2"X20 | 8 | 05 | 33 | 33 | 17 |
| S26791-06-05RW | 9/16"X18 | 8 | 05 | 33 | 36.5 | 19 |
| S26791-06-06RW | 9/16"X18 | 10 | 06 | 36.5 | 38.5 | 19 |
| S26791-06-08RW | 9/16"X18 | 13 | 08 | 43.5 | 44 | 19 |
| S26791-08-06RW | 3/4"X16 | 10 | 06 | 36.5 | 41 | 24 |
| S26791-08-08RW | 3/4"X16 | 13 | 08 | 43.5 | 46.5 | 24 |
| S26791-10-08RW | 7/8"X14 | 13 | 08 | 43.5 | 47 | 27 |
| S26791-10-10RW | 7/8"X14 | 16 | 10 | 56 | 51.5 | 27 |
| S26791-10-12RW | 7/8"X14 | 19 | 12 | 64 | 59.5 | 27 |
| S26791-12-10RW | 1.1/16"X12 | 16 | 10 | 56 | 54 | 32 |
| S26791-12-12RW | 1.1/16"X12 | 19 | 12 | 63 | 60.5 | 32 |
| S26791-14-12RW | 1.3/16"X12 | 19 | 12 | 64 | 63.5 | 36 |
| S26791-16-16RW | 1.5/16"X12 | 25 | 16 | 76 | 72 | 41 |
| S26791-20-20RW | 1.5/8"X12 | 32 | 20 | 91.5 | 85 | 50 |
| S26791-24-24RW | 1.7/8"X12 | 38 | 24 | 109 | 100 | 55 |
| S26791-32-32RW | 2.1/2"X12 | 51 | 32 | 129 | 121.5 | 75 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S26792-XX-XXRW。 Note: 1. For use with braided hoses. 2. If use with spiral hoses, hose fitting series number is S26792-XX-XXRW.

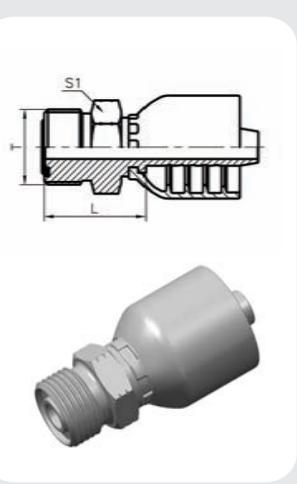S14211-RW美制ORFS外螺纹平面O形圈密封
ORFS MALE O-RING SEAL ISO 8434-3—SAE J1453


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 D MENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S14211-04-04RW | 9/16 " X18 | 6 | 04 | 22.5 | | 17 |
| S14211-06-04RW | 11/16 " X16 | 6 | 04 | 24 | | 19 |
| S14211-06-06RW | 11/16 " X16 | 10 | 06 | 24 | | 19 |
| S14211-08-06RW | 13/16 " X16 | 10 | 06 | 27.5 | | 22 |
| S14211-08-08RW | 13/16 " X16 | 13 | 08 | 28.5 | | 22 |
| S14211-08-10RW | 13/16 " X16 | 16 | 10 | 28.5 | | 22 |
| S14211-10-08RW | 1 " X14 | 13 | 08 | 32.5 | | 27 |
| S14211-10-10RW | 1 " X14 | 16 | 10 | 33.5 | | 27 |
| S14211-12-08RW | 1.3/16 " X12 | 13 | 08 | 35.5 | | 32 |
| S14211-12-10RW | 1.3/16 " X12 | 16 | 10 | 36 | | 32 |
| S14211-12-12RW | 1.3/16 " X12 | 19 | 12 | 36.5 | | 32 |
| S14211-16-12RW | 1.7/16 " X12 | 19 | 12 | 37 | | 41 |
| S14211-16-16RW | 1.7/16 " X12 | 25 | 16 | 38.5 | | 41 |
| S14211-20-20RW | 1.11/16 " X12 | 32 | 20 | 41.5 | | 46 |
| S14211-24-24RW | 2 " X12 | 38 | 24 | 43 | | 55 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S14212-XX-XXRW。
NOTE: 1. For use with braided hoses. 2. If use spiral hoses, hose fitting series number is S14212-XX-XXRW.

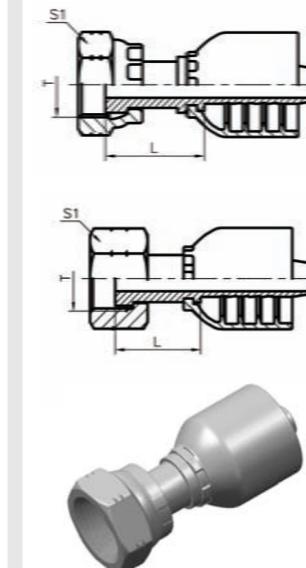S24211-RW
S24211-TRW

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S24211-04-04RW | 9/16 " X18 | 6 | 04 | | 22.5 | 19 |
| S24211-04-05RW | 9/16 " X18 | 8 | 05 | | 22.5 | 19 |
| S24211-04-06RW | 9/16 " X18 | 10 | 06 | | 22.5 | 19 |
| S24211-06-04TRW | 11/16 " X16 | 6 | 04 | | 23.5 | 22 |
| S24211-06-05TRW | 11/16 " X16 | 8 | 05 | | 23.5 | 22 |
| S24211-06-06RW | 11/16 " X16 | 10 | 06 | | 25.5 | 22 |
| S24211-06-08RW | 11/16 " X16 | 13 | 08 | | 26 | 22 |
| S24211-08-05TRW | 13/16 " X16 | 8 | 05 | | 25 | 27 |
| S24211-08-06TRW | 13/16 " X16 | 10 | 06 | | 25 | 27 |
| S24211-08-08RW | 13/16 " X16 | 13 | 08 | | 28 | 27 |
| S24211-08-10RW | 13/16 " X16 | 16 | 10 | | 29 | 27 |
| S24211-10-08TRW | 1 " X14 | 13 | 08 | | 29.5 | 30 |
| S24211-10-10RW | 1 " X14 | 16 | 10 | | 33 | 30 |
| S24211-10-12RW | 1 " X14 | 19 | 12 | | 33.5 | 30 |
| S24211-12-08TRW | 1.3/16 " X12 | 13 | 08 | | 30.5 | 36 |
| S24211-12-10TRW | 1.3/16 " X12 | 16 | 10 | | 31.5 | 36 |
| S24211-12-12RW | 1.3/16 " X12 | 19 | 12 | | 35 | 36 |
| S24211-12-16RW | 1.3/16 " X12 | 25 | 16 | | 36 | 36 |
| S24211-16-12TRW | 1.7/16 " X12 | 19 | 12 | | 35 | 41 |
| S24211-16-14TRW | 1.7/16 " X12 | 22 | 14 | | 35 | 41 |
| S24211-16-16TRW | 1.7/16 " X12 | 25 | 16 | | 35 | 41 |
| S24211-16-20RW | 1.7/16 " X12 | 32 | 20 | | 39.5 | 41 |
| S24211-20-16TRW | 1.11/16 " X12 | 25 | 16 | | 35 | 50 |
| S24211-24-20TRW | 2 " X12 | 32 | 20 | | 36 | 60 |
| S24211-24-24TRW | 2 " X12 | 38 | 24 | | 36 | 60 |


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S24212-XX-XXRW。
NOTE: 1. For use with braided hoses. 2. If use spiral hoses, hose fitting series number is S24212-XX-XXRW.

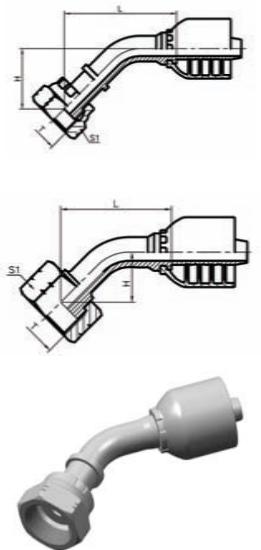**S24241-RW
S24241-TRW**45° 弯美制ORFS内螺纹平面
45° ELBOW ORFS FEMALE FLAT SEAT ISO 12151-1—SAE J516

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S24241-04-04RW | 9/16"X18 | 6 | 04 | 45.5 | 23.4 | 19 |
| S24241-04-05RW | 9/16"X18 | 8 | 05 | 47.6 | 24.3 | 19 |
| S24241-04-06RW | 9/16"X18 | 10 | 06 | 49.2 | 24.9 | 19 |
| S24241-06-04TRW | 11/16"X16 | 6 | 04 | 39.5 | 17.4 | 22 |
| S24241-06-05TRW | 11/16"X16 | 8 | 05 | 42.3 | 19 | 22 |
| S24241-06-06RW | 11/16"X16 | 10 | 06 | 51.3 | 27.1 | 22 |
| S24241-08-06TRW | 13/16"X16 | 10 | 06 | 44.6 | 20.3 | 27 |
| S24241-08-08RW | 13/16"X16 | 13 | 08 | 65.7 | 30.7 | 27 |
| S24241-08-10RW | 13/16"X16 | 16 | 10 | 76.5 | 31.7 | 27 |
| S24241-10-08TRW | 1"X14 | 13 | 08 | 58.2 | 23.3 | 30 |
| S24241-10-10RW | 1"X14 | 10 | 10 | 79.2 | 34.9 | 30 |
| S24241-12-08TRW | 1.3/16"X12 | 13 | 08 | 58.2 | 58.2 | 36 |
| S24241-12-10TRW | 1.3/16"X12 | 16 | 10 | 68.2 | 68.2 | 36 |
| S24241-12-12RW | 1.3/16"X12 | 19 | 12 | 87 | 39.5 | 36 |
| S24241-12-16RW | 1.3/16"X12 | 25 | 16 | 95.3 | 41 | 36 |
| S24241-16-12TRW | 1.7/16"X12 | 19 | 12 | 74 | 29.6 | 41 |
| S24241-16-14TRW | 1.7/16"X12 | 22 | 14 | 78.7 | 28.5 | 41 |
| S24241-16-16TRW | 1.7/16"X12 | 25 | 16 | 84.1 | 29.7 | 41 |
| S24241-20-16TRW | 1.11/16"X12 | 25 | 16 | 84.1 | 29.7 | 50 |
| S24241-24-20TRW | 2"X12 | 32 | 20 | 94.5 | 33.8 | 60 |
| S24241-24-24TRW | 2"X12 | 38 | 24 | 108.5 | 37.7 | 60 |


D

一体式

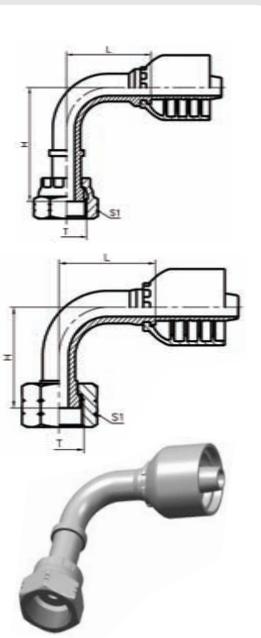**S24291-RW
S24291-TRW**90° 弯美制ORFS内螺纹平面
90° ELBOW ORFS FEMALE FLAT SEAT ISO 12151-1—SAE J516


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S24291-04-04RW | 9/16 " X18 | 6 | 04 | 30 | 41 | 19 |
| S24291-04-05RW | 9/16 " X18 | 8 | 05 | 33 | 44 | 19 |
| S24291-06-05TRW | 11/16 " X16 | 8 | 05 | 33 | 37.5 | 22 |
| S24291-06-06RW | 11/16 " X16 | 10 | 06 | 35.3 | 49.3 | 22 |
| S24291-06-08RW | 11/16 " X16 | 13 | 08 | 41 | 55 | 22 |
| S24291-08-06TRW | 13/16 " X16 | 10 | 06 | 35.3 | 39.8 | 27 |
| S24291-08-08RW | 13/16 " X16 | 13 | 08 | 41 | 575 | 27 |
| S24291-08-10RW | 13/16 " X16 | 16 | 10 | 56.5 | 61.5 | 27 |
| S24291-10-08TRW | 1 " X14 | 13 | 08 | 41 | 46 | 30 |
| S24291-10-10RW | 1 " X14 | 16 | 10 | 56 | 66 | 30 |
| S24291-10-12RW | 1 " X14 | 13 | 12 | 65.5 | 75.5 | 30 |
| S24291-12-10TRW | 1.3/16 " X12 | 16 | 10 | 59 | 51.5 | 36 |
| S24291-12-12RW | 1.3/16 " X12 | 19 | 12 | 65.5 | 77 | 36 |
| S24291-12-16RW | 1.3/16 " X12 | 25 | 16 | 76.7 | 83.5 | 36 |
| S24291-16-12TRW | 1.7/16 " X12 | 19 | 12 | 65.5 | 63 | 41 |
| S24291-16-14TRW | 1.7/16 " X12 | 22 | 14 | 71.2 | 63 | 41 |
| S24291-16-16TRW | 1.7/16 " X12 | 25 | 16 | 76.9 | 67.5 | 41 |
| S24291-20-16TRW | 1.11/16 " X12 | 25 | 16 | 76.7 | 67.5 | 50 |
| S24291-24-20TRW | 2 " X12 | 32 | 20 | 91.5 | 78.5 | 50 |
| S24291-24-24TRW | 2 " X12 | 38 | 24 | 109.4 | 92 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S24292-XX-XXRW。
NOTE: 1、For use with braided hoses. 2、If use spiral hoses, hose fitting series number is S24292-XX-XXRW.

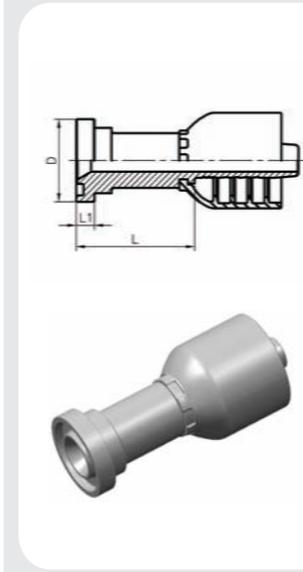
S87311-RWSAE 法兰 3000 PSI
SAE FLANGE 3000 PSI ISO 12151-3—SAE J516

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|---------------------|--------------|---------|---------------|------|------|
| | | 公称内径DN | 标号 DASH | L | D | L1 |
| S87311-08-08RW | 1/2" | 13 | 08 | 46 | 30.2 | 6.73 |
| S87311-12-08RW | 3/4" | 13 | 08 | 47 | 38.1 | 6.73 |
| S87311-12-10RW | 3/4" | 16 | 10 | 48 | 38.1 | 6.73 |
| S87311-12-12RW | 3/4" | 19 | 12 | 48 | 38.1 | 6.73 |
| S87311-12-16RW | 3/4" | 25 | 16 | 49 | 38.1 | 6.73 |
| S87311-16-12RW | 1" | 19 | 12 | 51 | 44.4 | 8 |
| S87311-16-16RW | 1" | 25 | 16 | 52 | 44.4 | 8 |
| S87311-16-20RW | 1" | 32 | 20 | 53 | 44.4 | 8 |
| S87311-20-16RW | 1.1/4" | 25 | 16 | 57 | 50.8 | 8 |
| S87311-20-20RW | 1.1/4" | 32 | 20 | 58 | 50.8 | 8 |
| S87311-24-20RW | 1.1/2" | 32 | 20 | 68 | 60.3 | 8 |
| S87311-24-24RW | 1.1/2" | 38 | 24 | 68 | 60.3 | 8 |
| S87311-32-24RW | 2" | 38 | 24 | 66 | 71.4 | 9.53 |
| S87311-32-32RW | 2" | 51 | 32 | 66 | 71.4 | 9.53 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S87312-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S87312-XX-XXRW.

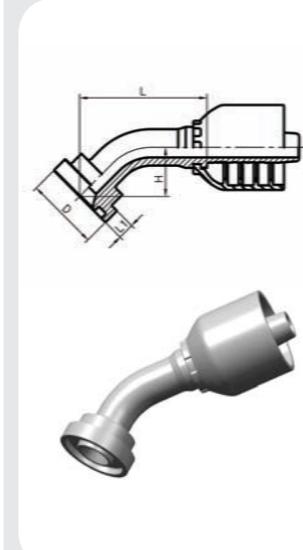
S87341-RW45° 弯SAE 法兰 3000 PSI
45° SAE FLANGE 3000 PSI ISO 12151-3—SAE J516

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|---------------------|--------------|---------|---------------|------|------|
| | | 公称内径DN | 标号 DASH | L | H | D |
| S87341-08-08RW | 1/2" | 13 | 08 | 55.5 | 23 | 30.2 |
| S87341-12-08RW | 3/4" | 13 | 08 | 59 | 24 | 38.1 |
| S87341-12-10RW | 3/4" | 16 | 10 | 64.5 | 25 | 38.1 |
| S87341-12-12RW | 3/4" | 19 | 12 | 71 | 28 | 38.1 |
| S87341-12-16RW | 3/4" | 25 | 16 | 82.5 | 29.5 | 38.1 |
| S87341-16-12RW | 1" | 19 | 12 | 71 | 28 | 44.4 |
| S87341-16-16RW | 1" | 25 | 16 | 82 | 29.4 | 44.4 |
| S87341-16-20RW | 1" | 32 | 20 | 94.5 | 33.8 | 44.4 |
| S87341-20-16RW | 1.1/4" | 25 | 16 | 77 | 31 | 50.8 |
| S87341-20-20RW | 1.1/4" | 32 | 20 | 94.5 | 33.8 | 50.8 |
| S87341-24-20RW | 1.1/2" | 32 | 20 | 94.5 | 3 | |

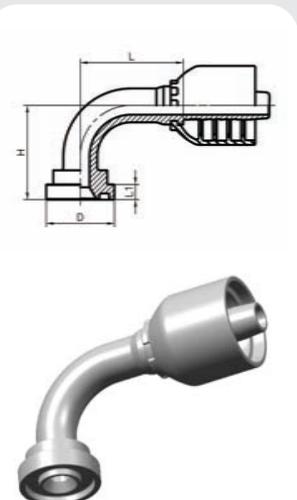S87391-RW90°弯 SAE 法兰 3000 PSI
90° SAE FLANGE 3000 PSI ISO 12151-3-SAE J516


| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|-------|------|------|
| | | 公称内径DN | 标号 DASH | L | H | D | L1 |
| S87391-08-08 | 1/2" | 13 | 08 | 43.5 | 45.5 | 30.2 | 6.73 |
| S87391-12-08 | 3/4" | 13 | 08 | 43.5 | 46.5 | 38.1 | 6.73 |
| S87391-12-10 | 3/4" | 16 | 10 | 55 | 51 | 38.1 | 6.73 |
| S87391-12-12 | 3/4" | 19 | 12 | 64 | 59 | 38.1 | 6.73 |
| S87391-12-16 | 3/4" | 25 | 16 | 74 | 66 | 38.1 | 6.73 |
| S87391-16-12 | 1" | 19 | 12 | 64 | 59 | 44.4 | 8 |
| S87391-16-16 | 1" | 25 | 16 | 74 | 66 | 44.4 | 8 |
| S87391-16-20 | 1" | 32 | 20 | 91.5 | 78.5 | 44.4 | 8 |
| S87391-20-16 | 1.1/4" | 25 | 16 | 74 | 66 | 50.8 | 8 |
| S87391-20-20 | 1.1/4" | 32 | 20 | 91.5 | 78.5 | 50.8 | 8 |
| S87391-24-20 | 1.1/2" | 32 | 20 | 91.5 | 80.5 | 60.3 | 8 |
| S87391-24-24 | 1.1/2" | 38 | 24 | 109 | 94 | 60.3 | 8 |
| S87391-32-24 | 2" | 38 | 24 | 109 | 94 | 71.4 | 9.53 |
| S87391-32-32 | 2" | 51 | 32 | 129 | 114.5 | 71.4 | 9.53 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S87392-XX-XXRW。
Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S87392-XX-XXRW.

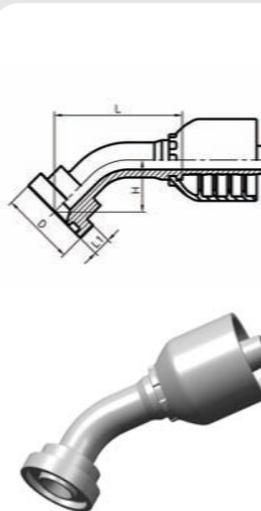S87641-RW45°弯 SAE 法兰 6000 PSI
45° SAE FLANGE 6000 PSI ISO 12151-3-SAE J516


| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|---|---|------|
| | | 公称内径DN | 标号 DASH | L | H | D | L1 |
| S87641-08-08RW | 1/2" | 13 | 08 | | | | 58 |
| S87641-12-10RW | 3/4" | 16 | 10 | | | | 67 |
| S87641-12-12RW | 3/4" | 19 | 12 | | | | 73.5 |
| S87641-16-12RW | 1" | 19 | 12 | | | | 76 |
| S87641-16-16RW | 1" | 25 | 16 | | | | 87 |
| S87641-16-20RW | 1" | 32 | 20 | | | | 99.5 |
| S87641-20-16RW | 1.1/4" | 25 | 16 | | | | 90 |
| S87641-20-20RW | 1.1/4" | 32 | 20 | | | | 103 |
| S87641-24-24RW | 1.1/2" | 38 | 24 | | | | 120 |
| S87641-32-24RW | 2" | 38 | 24 | | | | 125 |
| S87641-32-32RW | 2" | 51 | 32 | | | | 143 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S87642-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S87642-XX-XXRW.

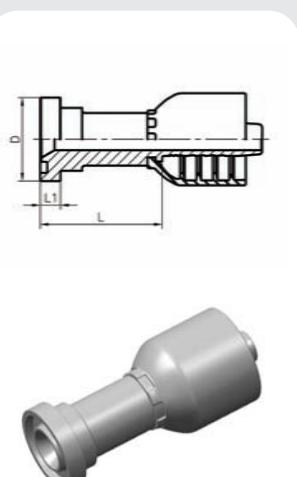S87611-RWSAE 法兰 6000 PSI
SAE FLANGE 6000 PSI ISO 12151-3-SAE J516

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|------|-------|--|
| | | 公称内径DN | 标号 DASH | L | D | L1 | |
| S87611-08-08RW | 1/2" | 13 | 08 | 47 | 31.7 | 7.75 | |
| S87611-12-10RW | 3/4" | 16 | 10 | 51 | 41.3 | 8.76 | |
| S87611-12-12RW | 3/4" | 19 | 12 | 51 | 41.3 | 8.76 | |
| S87611-16-12RW | 1" | 19 | 12 | 56 | 47.6 | 9.53 | |
| S87611-16-16RW | 1" | 25 | 16 | 57 | 47.6 | 9.53 | |
| S87611-16-20RW | 1" | 32 | 20 | 58 | 47.6 | 9.53 | |
| S87611-20-16RW | 1.1/4" | 25 | 16 | 65 | 54 | 10.29 | |
| S87611-20-20RW | 1.1/4" | 32 | 20 | 66 | 54 | 10.29 | |
| S87611-24-20RW | 1.1/2" | 32 | 20 | 75 | 63.5 | 12.57 | |
| S87611-24-24RW | 1.1/2" | 38 | 24 | 75 | 63.5 | 12.57 | |
| S87611-32-24RW | 2" | 38 | 24 | 85 | 79.4 | 12.57 | |
| S87611-32-32RW | 2" | 51 | 32 | 85 | 79.4 | 12.57 | |


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S87612-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S87612-XX-XXRW.

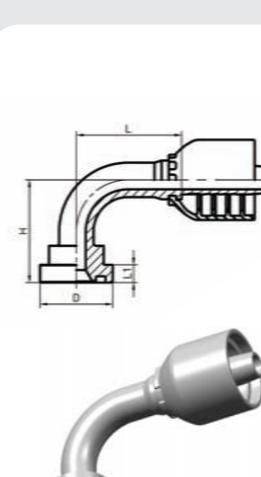S87691-RW90°弯 SAE 法兰 6000 PSI
90° SAE FLANGE 6000 PSI
ISO 12151-3-SAE J516

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|---|---|------|
| | | 公称内径DN | 标号 DASH | L | H | D | L1 |
| S87691-08-08RW | 1/2" | 13 | 08 | | | | 43.5 |
| S87691-12-10RW | 3/4" | 16 | 10 | | | | 55 |
| S87691-12-12RW | 3/4" | 19 | 12 | | | | 63 |
| S87691-16-12RW | 1" | 19 | 12 | | | | 66 |
| S87691-16-16RW | 1" | 25 | 16 | | | | 73 |
| S87691-16-20RW | 1" | 32 | 20 | | | | 91.5 |
| S87691-20-16RW | 1.1/4" | 25 | 16 | | | | 74 |
| S87691-20-20RW | 1.1/4" | 32 | 20 | | | | 91.5 |
| S87691-24-20RW | 1.1/2" | 32 | 20 | | | | 91.5 |
| S87691-24-24RW | 1.1/2" | 38 | 24 | | | | 109 |
| S87691-32-24RW | 2" | 38 | 24 | | | | 112 |
| S87691-32-32RW | 2" | 51 | 32 | | | | 137 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S87692-XX-XXRW。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S87692-XX-XXRW.

S10411

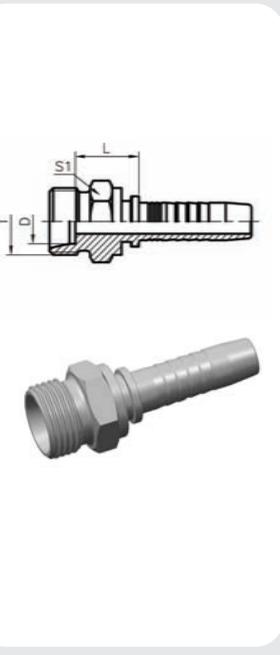


公制外螺纹24° 内锥面轻系列
METRIC MALE 24° CONE SET L.T.
ISO 84341-1—DIN3861

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | | L | D | S1 |
| S10411-12-04 | M12X1.5 | 6 | 04 | 6 | 20.5 | 6 | 14 |
| S10411-14-04 | M14X1.5 | 6 | 04 | 8 | 20.5 | 8 | 17 |
| S10411-14-05 | M14X1.5 | 8 | 05 | 8 | 21.5 | 8 | 17 |
| S10411-16-04 | M16X1.5 | 6 | 04 | 10 | 22.5 | 10 | 17 |
| S10411-16-05 | M16X1.5 | 8 | 05 | 10 | 22.5 | 10 | 17 |
| S10411-16-06 | M16X1.5 | 10 | 06 | 10 | 23.5 | 10 | 17 |
| S10411-18-05 | M18X1.5 | 8 | 05 | 12 | 23.5 | 12 | 19 |
| S10411-18-06 | M18X1.5 | 10 | 06 | 12 | 23.5 | 12 | 19 |
| S10411-22-06 | M22X1.5 | 10 | 06 | 15 | 24.5 | 15 | 24 |
| S10411-22-08 | M22X1.5 | 13 | 08 | 15 | 25 | 15 | 24 |
| S10411-26-08 | M26X1.5 | 13 | 08 | 18 | 26.5 | 18 | 27 |
| S10411-26-10 | M26X1.5 | 16 | 10 | 18 | 27 | 18 | 27 |
| S10411-30-10 | M30X2 | 16 | 10 | 22 | 30 | 22 | 32 |
| S10411-30-12 | M30X2 | 19 | 12 | 22 | 30 | 22 | 32 |
| S10411-36-16 | M36X2 | 25 | 16 | 28 | 33 | 28 | 41 |
| S10411-45-20 | M45X2 | 32 | 20 | 35 | 38 | 35 | 46 |
| S10411-52-24 | M52X2 | 38 | 24 | 42 | 38.5 | 42 | 55 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S10412-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S10412-XX-XX.

S20411-W

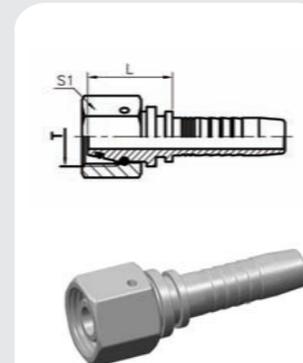


公制内螺纹24° 锥带O型圈轻系列
METRIC FEMALE 24° CONE O-RING L.T.
ISO 12151-2—DIN 3865


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|---|----|
| | | 公称内径DN | 标号 DASH | | L | D | S1 |
| S20411-12-04W | M12X1.5 | 6 | 04 | 6 | 26 | | 14 |
| S20411-14-04T | M14X1.5 | 6 | 04 | 8 | 23.5 | | 17 |
| S20411-14-05W | M14X1.5 | 8 | 05 | 8 | 27.5 | | 17 |
| S20411-14-06W | M14X1.5 | 10 | 06 | 8 | 27.5 | | 17 |
| S20411-16-04T | M16X1.5 | 6 | 04 | 10 | 20.5 | | 19 |
| S20411-16-05T | M16X1.5 | 8 | 05 | 10 | 25.5 | | 19 |
| S20411-16-06W | M16X1.5 | 10 | 06 | 10 | 28 | | 19 |
| S20411-18-05T | M18X1.5 | 8 | 05 | 12 | 23.5 | | 22 |
| S20411-18-06T | M18X1.5 | 10 | 06 | 12 | 26.5 | | 22 |
| S20411-18-08W | M18X1.5 | 13 | 08 | 12 | 29.5 | | 22 |
| S20411-22-08T | M22X1.5 | 13 | 08 | 15 | 28.5 | | 27 |
| S20411-22-10W | M22X1.5 | 16 | 10 | 15 | 26.5 | | 27 |
| S20411-26-10T | M26X1.5 | 16 | 10 | 18 | 32 | | 32 |
| S20411-26-12W | M26X1.5 | 19 | 12 | 18 | 35 | | 32 |
| S20411-30-10T | M30X2 | 16 | 10 | 22 | 32.5 | | 36 |
| S20411-30-12T | M30X2 | 19 | 12 | 22 | 33.5 | | 36 |
| S20411-30-16W | M30X2 | 25 | 16 | 22 | 31 | | 36 |
| S20411-36-12T | M36X2 | 19 | 12 | 28 | 35 | | 41 |
| S20411-36-14T | M36X2 | 22 | 14 | 28 | 35 | | 41 |
| S20411-36-16T | M36X2 | 25 | 16 | 28 | 36 | | 41 |
| S20411-36-20W | M36X2 | 32 | 20 | 28 | 33 | | 41 |
| S20411-45-16T | M45X2 | 25 | 16 | 35 | 34 | | 50 |
| S20411-45-20T | M45X2 | 32 | 20 | 35 | 35 | | 50 |
| S20411-45-24W | M45X2 | 38 | 24 | 35 | 35 | | 50 |
| S20411-52-20T | M52X2 | 32 | 20 | 42 | 38 | | 60 |
| S20411-52-24T | M52X2 | 38 | 24 | 42 | 38 | | 60 |
| S20411-52-32W | M52X2 | 51 | 32 | 42 | 39 | | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20412-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20412-XX-XX.

S20441-W

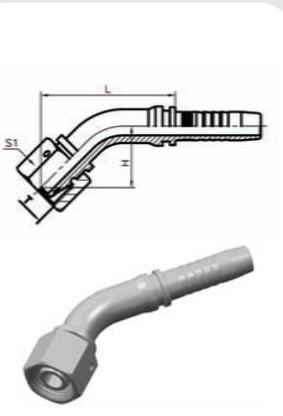

S20441-T

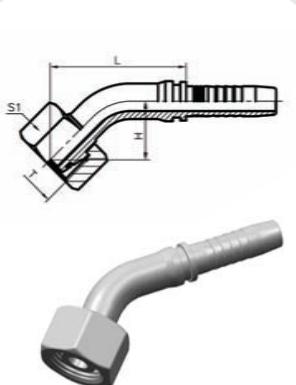

D


扣压式

45° 弯公制内螺纹24° 锥带O型圈轻系列
45° METRIC FEMALE 24° CONE O-RING L.T.
ISO 12151-2—DIN 3865


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20441-12-04W | M12X1.5 | 6 | 04 | 6 | 47 | 25 | 14 |
| S20441-14-04T | M14X1.5 | 6 | 04 | 8 | 39 | 17 | 17 |
| S20441-14-05W | M14X1.5 | 8 | 05 | 8 | 42.5 | 19 | 17 |
| S20441-14-06W | M14X1.5 | 10 | 06 | 8 | 45 | 19 | 17 |
| S20441-16-04T | M16X1.5 | 6 | 04 | 10 | 39 | 19 | 19 |
| S20441-16-05T | M16X1.5 | 8 | 05 | 10 | 45 | 21.5 | 19 |
| S20441-16-06W | M16X1.5 | 10 | 06 | 10 | 54.6 | 28.6 | 19 |
| S20441-18-05T | M18X1.5 | 8 | 05 | 12 | 46 | 22 | 22 |
| S20441-18-06T | M18X1.5 | 10 | 06 | 12 | 48 | 22.2 | 22 |
| S20441-18-08W | M18X1.5 | 13 | 08 | 12 | 54 | 21.5 | 22 |
| S20441-22-08T | M22X1.5 | 13 | 08 | 15 | 57 | 25 | 27 |
| S20441-22-10W | M22X1.5 | 16 | 10 | 15 | 73 | 33.7 | 27 |
| S20441-26-10T | M26X1.5 | 16 | 10 | 18 | 68.5 | 29 | 32 |
| S20441-26-12W | M26X1.5 | 19 | 12 | 18 | 81 | 38.5 | 32 |
| S20441-30-10T | M30X2 | 16 | 10 | 22 | 68 | 28.5 | 36 |
| S20441-30-12T | M30X2 | 19 | 12 | 22 | 74 | 31.5 | 36 |
| S20441-30-16W | M30X2 | 25 | 16 | 22 | 89.5 | 36.5 | 36 |
| S20441-36-12T | M36X2 | 19 | 12 | 28 | 76.5 | 33.7 | 41 |
| S20441-36-14T | M36X2 | 22 | 14 | 28 | 79.5 | 34 | 41 |
| S20441-36-16T | M36X2 | 25 | 16 | 28 | 88 | 35 | 41 |
| S20441-36-20W | M36X2 | 32 | 20 | 28 | 102 | 41.5 | 41 |
| S20441-45-16T | M45X2 | 25 | 16 | 35 | 88 | 35 | 50 |
| S20441-45-20T | M45X2 | 32 | 20 | 35 | 99.8 | 39.1 | 50 |
| S20441-45-24W | M45X2 | 38 | 24 | 35 | 113.5 | 44.5 | 50 |
| S20441-52-20T | M52X2 | 32 | 20 | 42 | 100 | 39.1 | 60 |
| S20441-52-24T | M52X2 | 38 | 24 | 42 | 115 | 45.3 | 60 |
| S20441-52-32W | M52X2 | 51 | 32 | 42 | 132.5 | 51.5 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20442-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20442-XX-XX.

S20491-W

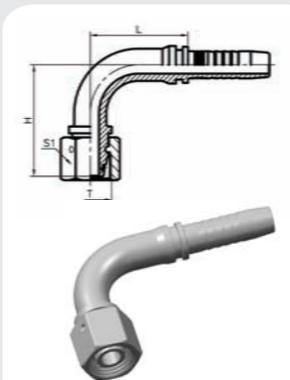

S20491-T

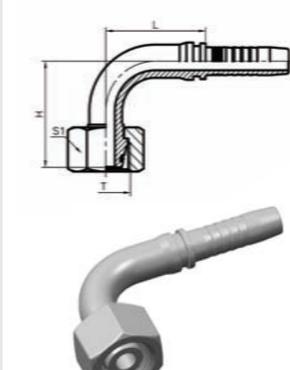

D


扣压式

90° 弯公制内螺纹24° 锥带O型圈轻系列
90° METRIC FEMALE 24° CONE O-RING L.T.
ISO 12151-2—DIN 3865

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|-------|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20491-12-04W | M12X1.5 | 6 | 04 | 6 | 30 | 40 | 14 |
| S20491-14-04T | M14X1.5 | 6 | 04 | 8 | 30 | 32 | 17 |
| S20491-14-05W | M14X1.5 | 8 | 05 | 8 | 33 | 43 | 17 |
| S20491-14-06W | M14X1.5 | 10 | 06 | 8 | 36.5 | 45 | 17 |
| S20491-16-04T | M16X1.5 | 6 | 04 | 10 | 28 | 29 | 19 |
| S20491-16-05T | M16X1.5 | 8 | 05 | 10 | 33 | 39 | 19 |
| S20491-16-06W | M16X1.5 | 10 | 06 | 10 | 36.5 | 51 | 19 |
| S20491-18-05T | M18X1.5 | 8 | 05 | 12 | 33 | 40 | 22 |
| S20491-18-06T | M18X1.5 | 10 | 06 | 12 | 36.5 | 42 | 22 |
| S20491-18-08W | M18X1.5 | 13 | 08 | 12 | 43.5 | 55 | 22 |
| S20491-22-08T | M22X1.5 | 13 | 08 | 15 | 43.5 | 48 | 27 |
| S20491-22-10W | M22X1.5 | 16 | 10 | 15 | 55 | 64 | 27 |
| S20491-26-10T | M26X1.5 | 16 | 10 | 18 | 55 | 56.5 | 32 |
| S20491-26-12W | M26X1.5 | 19 | 12 | 18 | 64 | 73.5 | 32 |
| S20491-30-10T | M30X2 | 16 | 10 | 22 | 55 | 56 | 36 |
| S20491-30-12T | M30X2 | 19 | 12 | 22 | 64 | 64 | 36 |
| S20491-30-16W | M30X2 | 25 | 16 | 22 | 74 | 76 | 36 |
| S20491-36-12T | M36X2 | 19 | 12 | 28 | 64 | 67 | 41 |
| S20491-36-14T | M36X2 | 22 | 14 | 28 | 74 | 74 | 41 |
| S20491-36-16T | M36X2 | 25 | 16 | 28 | 89.5 | 89.5 | 41 |
| S20491-45-16T | M45X2 | 25 | 16 | 35 | 74 | 73.5 | 50 |
| S20491-45-20T | M45X2 | 32 | 20 | 35 | 91.5 | 87.5 | 60 |
| S20491-45-24W | M45X2 | 38 | 24 | 35 | 109 | 101 | 50 |
| S20491-52-20T | M52X2 | 32 | 20 | 42 | 129 | 130.5 | 60 |
| S20491-52-24T | M52X2 | 38 | 24 | 42 | 129 | 130.5 | 60 |
| S20491-52-32W | M52X2 | 51 | 32 | 42 | 129 | 130.5 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20492-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20492-XX-XX.

S10511

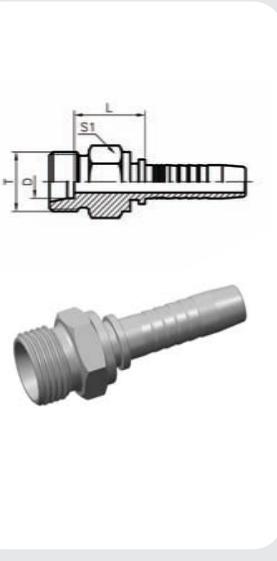


公制外螺纹24° 内锥面重系列
METRIC MALE 24° CONE SET H.T.
ISO 84341-1—DIN3861

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | | L | D | S1 |
| S10511-14-04 | M14X1.5 | 6 | 04 | 6 | 24 | 6 | 14 |
| S10511-16-04 | M16X1.5 | 6 | 04 | 8 | 26.5 | 8 | 17 |
| S10511-18-04 | M18X1.5 | 6 | 04 | 10 | 26.5 | 10 | 19 |
| S10511-18-06 | M18X1.5 | 10 | 06 | 10 | 27 | 10 | 19 |
| S10511-20-05 | M20X1.5 | 8 | 05 | 12 | 28 | 12 | 22 |
| S10511-20-06 | M20X1.5 | 10 | 06 | 12 | 28 | 12 | 22 |
| S10511-22-06 | M22X1.5 | 10 | 06 | 14 | 28.5 | 14 | 24 |
| S10511-24-08 | M24X1.5 | 13 | 08 | 16 | 32 | 16 | 27 |
| S10511-30-10 | M30X2 | 16 | 10 | 20 | 36 | 20 | 32 |
| S10511-30-12 | M30X2 | 19 | 12 | 20 | 36 | 20 | 32 |
| S10511-36-12 | M36X2 | 19 | 12 | 25 | 40 | 25 | 41 |
| S10511-36-16 | M36X2 | 25 | 16 | 25 | 41 | 25 | 41 |
| S10511-42-16 | M42X2 | 25 | 16 | 30 | 43 | 30 | 46 |
| S10511-52-20 | M52X2 | 32 | 20 | 38 | 48 | 38 | 55 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S10512-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S10512-XX-XX.

S20511-W




公制内螺纹24° 锥重系列
METRIC FEMALE 24° CONE O-RING H.T.
ISO 12151-2—DIN 3865

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | | L | | S1 |
| S20511-14-04T | M14X1.5 | 6 | 04 | 6 | 23.5 | | 17 |
| S20511-16-04T | M16X1.5 | 6 | 04 | 8 | 24 | | 19 |
| S20511-16-05T | M16X1.5 | 8 | 05 | 8 | 24 | | 19 |
| S20511-18-04T | M18X1.5 | 6 | 04 | 10 | 25 | | 22 |
| S20511-18-05T | M18X1.5 | 8 | 05 | 10 | 25 | | 22 |
| S20511-18-06T | M18X1.5 | 10 | 06 | 10 | 25 | | 22 |
| S20511-20-06T | M20X1.5 | 10 | 06 | 12 | 28.5 | | 24 |
| S20511-20-08W | M20X1.5 | 13 | 08 | 12 | 29 | | 24 |
| S20511-22-06T | M22X1.5 | 10 | 06 | 14 | 25.5 | | 27 |
| S20511-24-06T | M24X1.5 | 10 | 06 | 16 | 29.5 | | 30 |
| S20511-24-08T | M24X1.5 | 13 | 08 | 16 | 30 | | 30 |
| S20511-30-10T | M30X2 | 16 | 10 | 20 | 34 | | 36 |
| S20511-30-12T | M30X2 | 19 | 12 | 20 | 35 | | 36 |
| S20511-36-12T | M36X2 | 19 | 12 | 25 | 32 | | 46 |
| S20511-36-16T | M36X2 | 25 | 16 | 25 | 35.5 | | 46 |
| S20511-42-12T | M42X2 | 19 | 12 | 30 | 35 | | 50 |
| S20511-42-16T | M42X2 | 25 | 16 | 30 | 36 | | 50 |
| S20511-42-20W | M42X2 | 32 | 20 | 30 | 34.5 | | 50 |
| S20511-52-20T | M52X2 | 32 | 20 | 38 | 36 | | 60 |
| S20511-52-24T | M52X2 | 38 | 24 | 38 | 36 | | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20512-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20512-XX-XX.

S20541-W





45° 公制内螺纹24° 锥带O型圈重系列
45° METRIC FEMALE 24° CONE O-RING H.T.
ISO 12151-2—DIN 3865


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20541-14-04T | M14X1.5 | 6 | 04 | 6 | 41 | 18.5 | 17 |
| S20541-16-04T | M16X1.5 | 6 | 04 | 8 | 37 | 20 | 19 |
| S20541-16-05T | M16X1.5 | 8 | 05 | 8 | 46 | 22 | 19 |
| S20541-18-04T | M18X1.5 | 6 | 04 | 10 | 42 | 18.6 | 22 |
| S20541-18-05T | M18X1.5 | 8 | 05 | 10 | 47.2 | 23.2 | 22 |
| S20541-18-06T | M18X1.5 | 10 | 06 | 10 | 49.2 | 23.5 | 22 |
| S20541-20-06T | M20X1.5 | 10 | 06 | 12 | 50 | 24 | 24 |
| S20541-20-08W | M20X1.5 | 13 | 08 | 12 | 58.5 | 26 | 24 |
| S20541-22-06T | M22X1.5 | 10 | 06 | 14 | 50 | 24 | 27 |
| S20541-24-06T | M24X1.5 | 10 | 06 | 16 | 50 | 24.5 | 30 |
| S20541-24-08T | M24X1.5 | 13 | 08 | 16 | 59 | 26.5 | 30 |
| S20541-30-10T | M30X2 | 16 | 10 | 20 | 69 | 29.5 | 36 |
| S20541-30-12T | M30X2 | 19 | 12 | 20 | 76 | 33.3 | 36 |
| S20541-36-12T | M36X2 | 19 | 12 | 25 | 76 | 33 | 46 |
| S20541-36-16T | M36X2 | 25 | 16 | 25 | 88 | 34.5 | 46 |
| S20541-42-12T | M42X2 | 19 | 12 | 30 | 76.5 | 34 | 50 |
| S20541-42-16T | M42X2 | 25 | 16 | 30 | 88 | 35.1 | 50 |
| S20541-42-20W | M42X2 | 32 | 20 | 30 | 100 | 39.5 | 50 |
| S20541-52-20T | M52X2 | 32 | 20 | 38 | 100 | 39.4 | 60 |
| S20541-52-24T | M52X2 | 38 | 24 | 38 | 114 | 44.6 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20542-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20542-XX-XX.


S20511-T

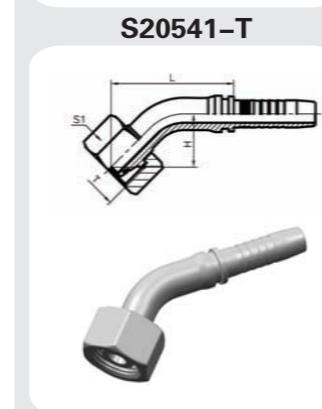

S20591-W

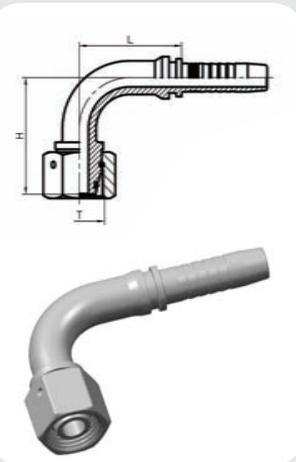

S20591-T

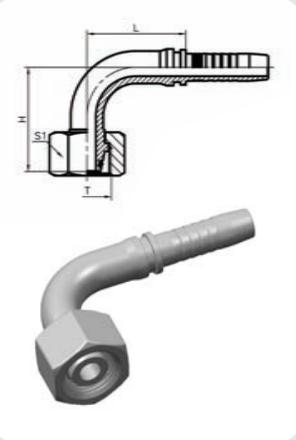

D


扣压式

90° 弯公制内螺纹24° 锥带O型圈重系列
90° METRIC FEMALE 24° CONE O-RING H.T.
ISO 12151-2—DIN 3865


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20591-14-04T | M14X1.5 | 6 | 04 | 6 | 32 | 35 | 17 |
| S20591-16-04T | M16X1.5 | 6 | 04 | 8 | 32 | 32 | 19 |
| S20591-16-05T | M16X1.5 | 8 | 05 | 8 | 33 | 32 | 19 |
| S20591-18-04T | M18X1.5 | 6 | 04 | 10 | 30 | 38 | 22 |
| S20591-18-05T | M18X1.5 | 8 | 05 | 10 | 33 | 38 | 22 |
| S20591-18-06T | M18X1.5 | 10 | 06 | 10 | 36.5 | 43.5 | 22 |
| S20591-20-06T | M20X1.5 | 10 | 06 | 12 | 36.5 | 44 | 24 |
| S20591-20-08W | M20X1.5 | 13 | 08 | 12 | 43.5 | 50 | 24 |
| S20591-22-06T | M22X1.5 | 10 | 06 | 14 | 36.5 | 44 | 27 |
| S20591-24-06T | M24X1.5 | 10 | 06 | 16 | 36.5 | 44 | 30 |
| S20591-24-08T | M24X1.5 | 13 | 08 | 16 | 43.5 | 50.5 | 30 |
| S20591-30-10T | M30X2 | 16 | 10 | 20 | 55 | 57 | 36 |
| S20591-30-12T | M30X2 | 19 | 12 | 20 | 64 | 60 | 36 |
| S20591-36-12T | M36X2 | 19 | 12 | 25 | 63 | 66 | 46 |
| S20591-36-16T | M36X2 | 25 | 16 | 25 | 74 | 73 | 46 |
| S20591-42-12T | M42X2 | 19 | 12 | 30 | 64 | 67 | 50 |
| S20591-42-16T | M42X2 | 25 | 16 | 30 | 74 | 74 | 50 |
| S20591-42-20W | M42X2 | 32 | 20 | 30 | 91.5 | 91 | 50 |
| S20591-52-20T | M52X2 | 32 | 20 | 38 | 91.5 | 86.5 | 60 |
| S20591-52-24T | M52X2 | 38 | 24 | 38 | 109 | 100 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20592-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20592-XX-XX.

S20111



S20111-T




公制内螺纹球面
METRIC FEMALE MULTISEAL


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | |
|----------------|-----------------|--------------|---------|---------------|----|
| | | 公称内径DN | 标号 DASH | | |
| S20111-12-04 | M12X1.5 | 6 | 04 | 19.5 | 17 |
| S20111-12-05 | M12X1.5 | 8 | 05 | 19.5 | 17 |
| S20111-14-04T | M14X1.5 | 6 | 04 | 19.5 | 17 |
| S20111-14-05 | M14X1.5 | 8 | 05 | 19.5 | 19 |
| S20111-16-04T | M16X1.5 | 6 | 04 | 20 | 19 |
| S20111-16-05T | M16X1.5 | 8 | 05 | 20 | 19 |
| S20111-18-06T | M18X1.5 | 10 | 06 | 20.5 | 22 |
| S20111-18-08 | M18X1.5 | 13 | 08 | 22 | 24 |
| S20111-22-08T | M22X1.5 | 13 | 08 | 22.8 | 27 |
| S20111-24-10 | M24X1.5 | 16 | 10 | 25.5 | 30 |
| S20111-27-10T | M27X1.5 | 16 | 10 | 23.5 | 32 |
| S20111-30-12T | M30X1.5 | 19 | 12 | 24.5 | 36 |
| S20111-39-16T | M39X2 | 25 | 16 | 29.5 | 46 |
| S20111-45-20T | M45X2 | 32 | 20 | 31.5 | 55 |
| S20111-52-24T | M52X2 | 38 | 24 | 33 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20112-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20112-XX-XX.

S20141



S20141-T




45° 弯公制内螺纹球面
45° METRIC FEMALE MULTISEAL

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | | L | H |
| S20141-12-04 | M12X1.5 | 6 | 04 | 39.5 | 16.5 | 17 |
| S20141-14-04T | M14X1.5 | 6 | 04 | 43 | 18.3 | 17 |
| S20141-14-05 | M14X1.5 | 8 | 05 | 45.5 | 22.2 | 19 |
| S20141-16-04T | M16X1.5 | 6 | 04 | 42.5 | 21.4 | 19 |
| S20141-16-05T | M16X1.5 | 8 | 05 | 44.5 | 19.5 | 19 |
| S20141-16-06 | M16X1.5 | 10 | 06 | 50 | 24 | 22 |
| S20141-18-06T | M18X1.5 | 10 | 06 | 50 | 24 | 22 |
| S20141-18-08 | M18X1.5 | 13 | 08 | 58.5 | 28.8 | 24 |
| S20141-22-08T | M22X1.5 | 13 | 08 | 60 | 27.2 | 27 |
| S20141-24-10 | M24X1.5 | 16 | 10 | 67 | 27 | 30 |
| S20141-27-10T | M27X1.5 | 16 | 10 | 69 | 29.6 | 32 |
| S20141-30-12T | M30X1.5 | 19 | 12 | 76.5 | 33.7 | 36 |
| S20141-39-16T | M39X2 | 25 | 16 | 86 | 33.6 | 46 |
| S20141-45-20T | M45X2 | 32 | 20 | 99 | 38.4 | 55 |
| S20141-52-24T | M52X2 | 38 | 24 | 114 | 44.6 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20142-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20142-XX-XX.

S20191




S20191-T

90° METRIC FEMALE MULTISEAL
90° 公制内螺纹球面


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S20191-12-04 | M12X1.5 | 6 | 04 | 30 | 32 | 17 |
| S20191-14-04T | M14X1.5 | 6 | 04 | 32 | 35.5 | 17 |
| S20191-14-05 | M14X1.5 | 8 | 05 | 33 | 40.5 | 19 |
| S20191-16-04T | M16X1.5 | 6 | 04 | 32 | 34.5 | 19 |
| S20191-16-05T | M16X1.5 | 8 | 05 | 33 | 41 | 19 |
| S20191-16-06 | M16X1.5 | 10 | 06 | 36.5 | 43 | 22 |
| S20191-18-06T | M18X1.5 | 10 | 06 | 36.5 | 44.5 | 22 |
| S20191-18-08 | M18X1.5 | 13 | 08 | 43.5 | 50 | 24 |
| S20191-22-08T | M22X1.5 | 13 | 08 | 43.5 | 52 | 27 |
| S20191-24-10 | M24X1.5 | 16 | 10 | 55 | 56.5 | 30 |
| S20191-27-10T | M27X1.5 | 16 | 10 | 55 | 54 | 32 |
| S20191-30-12T | M30X1.5 | 19 | 12 | 64 | 67 | 36 |
| S20191-39-16T | M39X2 | 25 | 16 | 74 | 72 | 46 |
| S20191-45-20T | M45X2 | 32 | 20 | 91.5 | 85 | 55 |
| S20191-52-24T | M52X2 | 38 | 24 | 109 | 100 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20192-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20192-XX-XX.

S20241




S20241-T

45° METRIC FEMALE FLAT SEAT
45° 公制内螺纹平面
参考REF.GB/T 9065.3

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|-------|------|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S20241-14-04T | M14X1.5 | 6 | 04 | | 37 | 13.5 |
| S20241-14-05 | M14X1.5 | 8 | 05 | | 41 | 17.5 |
| S20241-16-05T | M16X1.5 | 8 | 05 | | 42 | 18.5 |
| S20241-16-06 | M16X1.5 | 10 | 06 | | 45 | 19 |
| S20241-18-06T | M18X1.5 | 10 | 06 | | 46 | 20 |
| S20241-22-08T | M22X1.5 | 13 | 08 | | 53 | 21.5 |
| S20241-27-10T | M27X1.5 | 16 | 10 | | 65 | 25.5 |
| S20241-30-12T | M30X1.5 | 19 | 12 | | 70 | 27.5 |
| S20241-39-16T | M39X2 | 25 | 16 | | 84 | 29.7 |
| S20241-45-20T | M45X2 | 32 | 20 | | 94.5 | 34 |
| S20241-52-24T | M52X2 | 38 | 24 | | 110 | 41 |
| S20241-60-28T | M60X2 | 45 | 28 | | 118.5 | 43.6 |
| S20241-64-32T | M64X2 | 51 | 32 | | 128 | 45.5 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20242-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20242-XX-XX.

S20211




S20211-T

METRIC FEMALE FLAT SEAT
公制内螺纹平面
参考REF.GB/T 9065.3

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S20211-14-04T | M14X1.5 | 6 | 04 | 15.5 | 17 | |
| S20211-14-05 | M14X1.5 | 8 | 05 | 15.5 | 19 | |
| S20211-16-05T | M16X1.5 | 8 | 05 | 16.5 | 19 | |
| S20211-16-06 | M16X1.5 | 10 | 06 | 16.5 | 22 | |
| S20211-18-06T | M18X1.5 | 10 | 06 | 17.5 | 22 | |
| S20211-22-08T | M22X1.5 | 13 | 08 | 18.5 | 27 | |
| S20211-27-10T | M27X1.5 | 16 | 10 | 22 | 32 | |
| S20211-30-12T | M30X1.5 | 19 | 12 | 21 | 36 | |
| S20211-36-12T | M36X2 | 19 | 12 | 21 | 41 | |
| S20211-39-16T | M39X2 | 25 | 16 | 23.5 | 46 | |
| S20211-45-20T | M45X2 | 32 | 20 | 24.5 | 55 | |
| S20211-52-24T | M52X2 | 38 | 24 | 25 | 60 | |
| S20211-60-28T | M60X2 | 45 | 28 | 26 | 70 | |
| S20211-64-32T | M64X2 | 51 | 32 | 27 | 75 | |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20212-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20212-XX-XX.

S20291





S20291-T

90° METRIC FEMALE FLAT SEAT
90° 公制内螺纹平面
参考REF.GB/T 9065.3

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|-------|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S20291-14-04T | M14X1.5 | 6 | 04 | | 32 | 28.5 |
| S20291-14-05 | M14X1.5 | 8 | 05 | | 33 | 33.5 |
| S20291-16-05T | M16X1.5 | 8 | 05 | | 32.5 | 35 |
| S20291-16-06 | M16X1.5 | 10 | 06 | | 36.5 | 37 |
| S20291-18-06T | M18X1.5 | 10 | 06 | | 36.5 | 39 |
| S20291-22-08T | M22X1.5 | 13 | 08 | | 43.5 | 43.5 |
| S20291-27-10T | M27X1.5 | 16 | 10 | | 55 | 52 |
| S20291-30-12T | M30X1.5 | 19 | 12 | | 63 | 58 |
| S20291-39-16T | M39X2 | 25 | 16 | | 74 | 68.5 |
| S20291-45-20T | M45X2 | 32 | 20 | | 91.5 | 78.5 |
| S20291-52-24T | M52X2 | 38 | 24 | | 109 | 92 |
| S20291-64-32T | M64X2 | 51 | 32 | | 129 | 113.3 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20292-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20292-XX-XX.

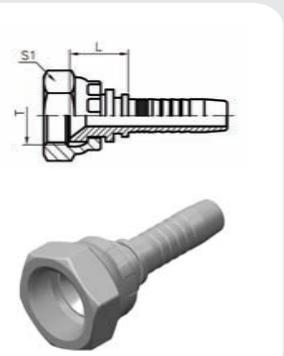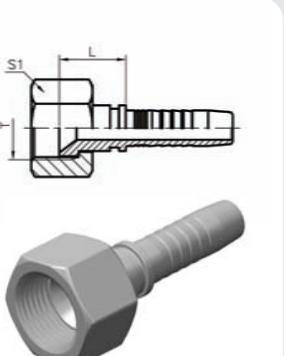S20711**S20711-T**



D

扣压式

国标公制内螺纹74° 内锥面
GB METRIC FEMALE 74° CONE SEAT
参考 REF.GB/T 9065.1

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|---|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S20711-12-04 | M12X1.5 | 6 | 04 | 14.5 | | 17 |
| S20711-14-04T | M14X1.5 | 6 | 04 | 15.5 | | 17 |
| S20711-14-05 | M14X1.5 | 8 | 05 | 15.5 | | 19 |
| S20711-14-06 | M14X1.5 | 10 | 06 | 15.5 | | 19 |
| S20711-16-04T | M16X1.5 | 6 | 04 | 16.5 | | 19 |
| S20711-16-05T | M16X1.5 | 8 | 05 | 16.5 | | 19 |
| S20711-16-06 | M16X1.5 | 10 | 06 | 16.5 | | 22 |
| S20711-18-05T | M18X1.5 | 8 | 05 | 18.5 | | 22 |
| S20711-18-06T | M18X1.5 | 10 | 06 | 17.5 | | 22 |
| S20711-20-06T | M20X1.5 | 10 | 06 | 16 | | 24 |
| S20711-22-08T | M22X1.5 | 13 | 08 | 18.5 | | 27 |
| S20711-27-08T | M27X1.5 | 13 | 08 | 20.5 | | 32 |
| S20711-27-10T | M27X1.5 | 16 | 10 | 21.5 | | 32 |
| S20711-30-10T | M30X1.5 | 16 | 10 | 21.5 | | 36 |
| S20711-30-12T | M30X1.5 | 19 | 12 | 21.5 | | 36 |
| S20711-33-12T | M33X2 | 19 | 12 | 22 | | 41 |
| S20711-36-12T | M36X2 | 19 | 12 | 21 | | 41 |
| S20711-36-14T | M36X2 | 22 | 14 | 21 | | 41 |
| S20711-36-16T | M36X2 | 25 | 16 | 22 | | 41 |
| S20711-39-16T | M39X2 | 25 | 16 | 23.5 | | 46 |
| S20711-42-16T | M42X2 | 25 | 16 | 23.5 | | 50 |
| S20711-45-20T | M45X2 | 32 | 20 | 25 | | 55 |
| S20711-52-24T | M52X2 | 38 | 24 | 25 | | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20712-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20712-XX-XX.

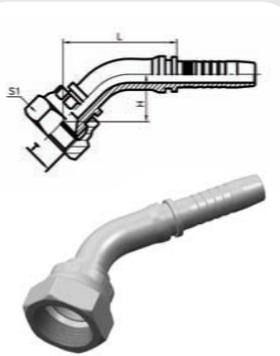S20741**S20741-T**

D


扣压式

45° 国标公制内螺纹74° 内锥面
45° GB METRIC FEMALE 74° CONE SEAT
参考 REF.GB/T 9065.1


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|------|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S20741-12-04 | M12X1.5 | 6 | 04 | | 38 | 15 |
| S20741-14-04T | M14X1.5 | 6 | 04 | | 39 | 16 |
| S20741-14-05 | M14X1.5 | 8 | 05 | | 43.5 | 19.5 |
| S20741-14-06 | M14X1.5 | 10 | 06 | | 46 | 20 |
| S20741-16-04T | M16X1.5 | 6 | 04 | | 39 | 15.5 |
| S20741-16-05T | M16X1.5 | 8 | 05 | | 42.5 | 19 |
| S20741-16-06 | M16X1.5 | 10 | 06 | | 46.5 | 20.5 |
| S20741-18-05T | M18X1.5 | 8 | 05 | | 44.5 | 21 |
| S20741-18-06T | M18X1.5 | 10 | 06 | | 47 | 23 |
| S20741-22-08T | M22X1.5 | 13 | 08 | | 56.2 | 23.7 |
| S20741-27-08T | M27X1.5 | 13 | 08 | | 55 | 22.5 |
| S20741-27-10T | M27X1.5 | 16 | 10 | | 63.5 | 24 |
| S20741-30-10T | M30X1.5 | 16 | 10 | | 67 | 27 |
| S20741-30-12T | M30X1.5 | 19 | 12 | | 72.8 | 30.2 |
| S20741-33-12T | M33X2 | 19 | 12 | | 72 | 29.5 |
| S20741-36-12T | M36X2 | 19 | 12 | | 69.5 | 26.5 |
| S20741-36-14T | M36X2 | 22 | 14 | | 74 | 28.4 |
| S20741-36-16T | M36X2 | 25 | 16 | | 81 | 28 |
| S20741-39-16T | M39X2 | 25 | 16 | | 82 | 29.4 |
| S20741-45-20T | M45X2 | 32 | 20 | | 94.5 | 33.8 |
| S20741-52-24T | M52X2 | 38 | 24 | | 108 | 39 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20742-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20742-XX-XX.

S20791

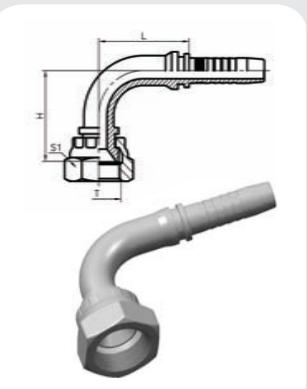

S20791-T

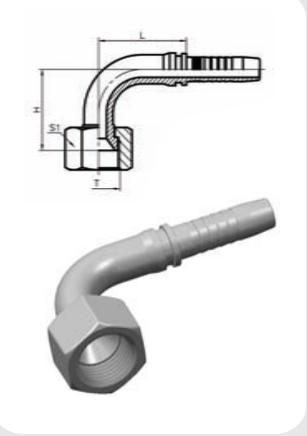

D


扣压式

90° 弯国标公制内螺纹74° 内锥面
90° GB METRIC FEMALE 74° CONE SEAT
参考 REF.GB/T 9065.1

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S20791-12-04 | M12X1.5 | 6 | 04 | 32 | 30 | 17 |
| S20791-14-04T | M14X1.5 | 6 | 04 | 30 | 30 | 17 |
| S20791-14-05 | M14X1.5 | 8 | 05 | 33 | 37 | 19 |
| S20791-14-06 | M14X1.5 | 10 | 06 | 36.5 | 38.5 | 19 |
| S20791-16-04T | M16X1.5 | 6 | 04 | 32 | 32.5 | 19 |
| S20791-16-05T | M16X1.5 | 8 | 05 | 33 | 36 | 19 |
| S20791-16-06 | M16X1.5 | 10 | 06 | 36.5 | 39.5 | 22 |
| S20791-18-05T | M18X1.5 | 8 | 05 | 33 | 38.5 | 22 |
| S20791-18-06T | M18X1.5 | 10 | 06 | 36.5 | 40.5 | 22 |
| S20791-22-08T | M22X1.5 | 13 | 08 | 43.5 | 46.5 | 27 |
| S20791-27-08T | M27X1.5 | 13 | 08 | 43.5 | 48.5 | 32 |
| S20791-27-10T | M27X1.5 | 16 | 10 | 55 | 53 | 32 |
| S20791-30-10T | M30X1.5 | 16 | 10 | 55 | 54 | 36 |
| S20791-30-12T | M30X1.5 | 19 | 12 | 64 | 62 | 36 |
| S20791-33-12T | M33X2 | 19 | 12 | 64 | 61 | 41 |
| S20791-36-12T | M36X2 | 19 | 12 | 64 | 57 | 41 |
| S20791-36-14T | M36X2 | 22 | 14 | 68.5 | 63 | 41 |
| S20791-36-16T | M36X2 | 25 | 16 | 74 | 64 | 41 |
| S20791-39-16T | M39X2 | 25 | 16 | 74 | 66 | 46 |
| S20791-45-20T | M45X2 | 32 | 20 | 91.5 | 78.5 | 55 |
| S20791-52-24T | M52X2 | 38 | 24 | 109 | 92 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S20792-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S20792-XX-XX.

S50011

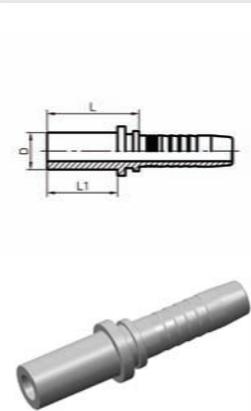

卡套式直管


METRIC STANDPIPE STRAIGHT

D

轻系列
(L)重系列
(S)

| 代号 PART NO. | 管子外径 TUBE O.D | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | 备注 NOTE |
|----------------|------------------|--------------|---------|---------------|----|----|------------|
| | | 公称内径DN | 标号 DASH | L | D | L1 | |
| S50011-06L-04 | 6 | 6 | 04 | 29.5 | 6 | 22 | |
| S50011-10L-05 | 10 | 8 | 05 | 31 | 10 | 23 | |
| S50011-10L-06 | 10 | 10 | 06 | 33.5 | 10 | 23 | |
| S50011-12L-06 | 12 | 10 | 06 | 32 | 12 | 25 | |
| S50011-12L-08 | 12 | 13 | 08 | 32.5 | 12 | 25 | |
| S50011-15-08 | 15 | 13 | 08 | 35.5 | 15 | 25 | |
| S50011-18-10 | 18 | 16 | 10 | 35 | 18 | 26 | |
| S50011-22-10 | 22 | 16 | 10 | 38 | 22 | 28 | |
| S50011-22-12 | 22 | 19 | 12 | 38 | 22 | 28 | |
| S50011-22-16 | 22 | 25 | 16 | 39 | 22 | 28 | |
| S50011-28-16 | 28 | 25 | 16 | 41 | 28 | 30 | |
| S50011-35-20 | 35 | 32 | 20 | 56 | 35 | 36 | |
| S50011-42-24 | 42 | 38 | 24 | 62 | 42 | 40 | |
| S50011-08S-04 | 8 | 6 | 04 | 31 | 8 | 24 | |
| S50011-08S-05 | 8 | 8 | 05 | 31 | 8 | 24 | |
| S50011-08S-06 | 8 | 10 | 06 | 31 | 8 | 24 | |
| S50011-10S-04 | 10 | 6 | 04 | 35 | 10 | 23 | |
| S50011-12S-04 | 12 | 6 | 04 | 33 | 12 | 25 | |
| S50011-12S-05 | 12 | 8 | 05 | 33 | 12 | 25 | |
| S50011-14-05 | 14 | 8 | 05 | 39.5 | 14 | 29 | |
| S50011-14-06 | 14 | 10 | 06 | 39.5 | 14 | 29 | |
| S50011-14-08 | 14 | 13 | 08 | 40 | 14 | 29 | |
| S50011-16-08 | 16 | 13 | 08 | 41 | 16 | 30 | |
| S50011-16-10 | 16 | 16 | 10 | 42 | 16 | 30 | |
| S50011-20-10 | 20 | 16 | 10 | 52.5 | 20 | 36 | |
| S50011-20-12 | 20 | 19 | 12 | 52.5 | 20 | 36 | |
| S50011-25-12 | 25 | 19 | 12 | 56 | 25 | 40 | |
| S50011-25-16 | 25 | 25 | 16 | 57 | 25 | 40 | |
| S50011-30-16 | 30 | 25 | 16 | 63 | 30 | 44 | |
| S50011-30-20 | 30 | 32 | 20 | 64 | 30 | 44 | |
| S50011-38-16 | 38 | 25 | 16 | 69 | 38 | 50 | |
| S50011-38-20 | 38 | 32 | 20 | 70 | 38 | 50 | |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S50012-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S50012-XX-XX.

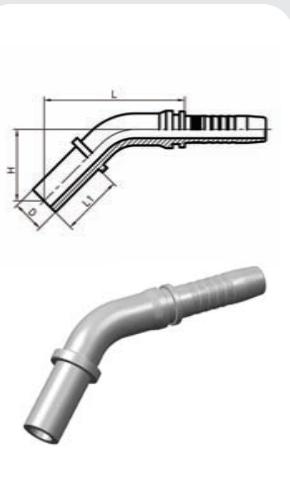
S50041**D**

扣压式

45° METRIC STRANDPIPE STRAIGHT

| 代号 PART NO. | 管子外径 TUBE O.D | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | 备注 NOTE |
|----------------|------------------|--------------|---------|---------------|------|----|----|------------|
| | | 公称内径DN | 标号 DASH | L | H | D | L1 | |
| S50041-06L-04 | 6 | 6 | 04 | 52 | 30 | 6 | 22 | 轻系列 (L) |
| S50041-10L-05 | 10 | 8 | 05 | 54 | 30.5 | 10 | 23 | |
| S50041-10L-06 | 10 | 10 | 06 | 56 | 31 | 10 | 23 | |
| S50041-12L-06 | 12 | 10 | 06 | 58.5 | 34 | 12 | 25 | |
| S50041-12L-08 | 12 | 13 | 08 | 73 | 37 | 12 | 25 | |
| S50041-15-08 | 15 | 13 | 08 | 71 | 35.5 | 15 | 25 | |
| S50041-18-10 | 18 | 16 | 10 | 85 | 39.5 | 18 | 26 | |
| S50041-22-10 | 22 | 16 | 10 | 87 | 42 | 22 | 28 | |
| S50041-22-12 | 22 | 19 | 12 | 93.5 | 45.5 | 22 | 28 | |
| S50041-22-16 | 22 | 25 | 16 | 101 | 46.5 | 22 | 28 | |
| S50041-28-16 | 28 | 25 | 16 | 104 | 49.5 | 28 | 30 | |
| S50041-35-20 | 35 | 32 | 20 | 119 | 57.5 | 35 | 36 | |
| S50041-08S-04 | 8 | 6 | 04 | 54 | 30 | 8 | 24 | |
| S50041-08S-05 | 8 | 8 | 05 | 56 | 32 | 8 | 24 | |
| S50041-08S-06 | 8 | 10 | 06 | 58 | 33 | 8 | 24 | |
| S50041-10S-04 | 10 | 6 | 04 | 54 | 31 | 10 | 23 | |
| S50041-12S-04 | 12 | 6 | 04 | 57 | 35 | 12 | 25 | |
| S50041-12S-05 | 12 | 8 | 05 | 59 | 35.5 | 12 | 25 | |
| S50041-14-05 | 14 | 8 | 05 | 61 | 37 | 14 | 29 | |
| S50041-14-06 | 14 | 10 | 06 | 62 | 37.5 | 14 | 29 | |
| S50041-14-08 | 14 | 13 | 08 | 74 | 38.5 | 14 | 29 | |
| S50041-16-08 | 16 | 13 | 08 | 77 | 41.5 | 16 | 30 | |
| S50041-16-10 | 16 | 16 | 10 | 88 | 43 | 16 | 30 | |
| S50041-20-10 | 20 | 16 | 10 | 93 | 48 | 20 | 36 | |
| S50041-20-12 | 20 | 19 | 12 | 101 | 52.5 | 20 | 36 | |
| S50041-25-12 | 25 | 19 | 12 | 102 | 54 | 25 | 40 | |
| S50041-25-16 | 25 | 25 | 16 | 110 | 55 | 25 | 40 | |
| S50041-30-16 | 30 | 25 | 16 | 114 | 59.5 | 30 | 44 | |
| S50041-30-20 | 30 | 32 | 20 | 125 | 63.5 | 30 | 44 | |
| S50041-38-16 | 38 | 25 | 16 | 119 | 63.5 | 38 | 50 | |
| S50041-38-20 | 38 | 32 | 20 | 129 | 68 | 38 | 50 | |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S50042-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S50042-XX-XX.

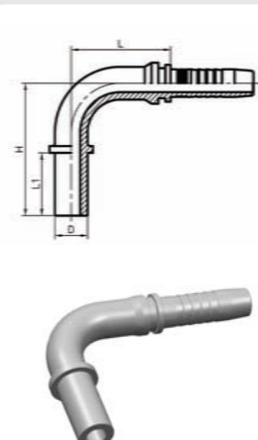
S50091**D**

扣压式

90° METRIC STRANDPIPE STRAIGHT


| 代号 PART NO. | 管子外径 TUBE O.D | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | 备注 NOTE |
|----------------|------------------|--------------|---------|---------------|-------|----|----|------------|
| | | 公称内径DN | 标号 DASH | L | H | D | L1 | |
| S50091-06L-04 | 6 | 6 | 04 | 31 | 44 | 6 | 22 | 轻系列 (L) |
| S50091-10L-05 | 10 | 8 | 05 | 33 | 53 | 10 | 23 | |
| S50091-10L-06 | 10 | 10 | 06 | 36.5 | 55 | 10 | 23 | |
| S50091-12L-06 | 12 | 10 | 06 | 36.5 | 60 | 12 | 25 | |
| S50091-12L-08 | 12 | 13 | 08 | 43.5 | 67 | 12 | 25 | |
| S50091-15-08 | 15 | 13 | 08 | 43.5 | 69 | 15 | 25 | |
| S50091-18-10 | 18 | 16 | 10 | 55 | 73 | 18 | 26 | |
| S50091-22-10 | 22 | 16 | 10 | 55 | 75 | 22 | 28 | |
| S50091-22-12 | 22 | 19 | 12 | 64 | 86 | 22 | 28 | |
| S50091-22-16 | 22 | 25 | 16 | 74 | 91.5 | 22 | 28 | |
| S50091-28-16 | 28 | 25 | 16 | 74 | 93.5 | 28 | 30 | |
| S50091-35-20 | 35 | 32 | 20 | 91.5 | 112.5 | 35 | 36 | |
| S50091-08S-04 | 8 | 6 | 04 | 30 | 48 | 8 | 24 | |
| S50091-08S-05 | 8 | 8 | 05 | 33 | 55 | 8 | 24 | |
| S50091-08S-06 | 8 | 10 | 06 | 36.5 | 58 | 8 | 24 | |
| S50091-10S-04 | 10 | 6 | 04 | 32 | 50 | 10 | 23 | |
| S50091-12S-04 | 12 | 6 | 04 | 32 | 50 | 12 | 23 | |
| S50091-12S-05 | 12 | 8 | 05 | 33 | 60 | 12 | 23 | |
| S50091-14-06 | 14 | 10 | 06 | 36.5 | 63 | 14 | 29 | |
| S50091-14-08 | 14 | 13 | 08 | 43.5 | 69 | 14 | 29 | |
| S50091-16-08 | 16 | 13 | 08 | 43.5 | 70 | 16 | 30 | |
| S50091-16-10 | 16 | 16 | 10 | 55 | 77.5 | 16 | 30 | |
| S50091-20-10 | 20 | 16 | 10 | 55 | 83.5 | 20 | 36 | |
| S50091-20-12 | 20 | 19 | 12 | 64 | 95.5 | 20 | 36 | |
| S50091-25-12 | 25 | 19 | 12 | 64 | 99.5 | 25 | 40 | |
| S50091-25-16 | 25 | 25 | 16 | 74 | 103.5 | 25 | 40 | |
| S50091-30-16 | 30 | 25 | 16 | 74 | 109.5 | 30 | 40 | |
| S50091-30-20 | 30 | 32 | 20 | 91.5 | 120.5 | 30 | 44 | |
| S50091-38-16 | 38 | 25 | 16 | 74 | 115.5 | 38 | 50 | |
| S50091-38-20 | 38 | 32 | 20 | 91.5 | 126.5 | 38 | 50 | |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S50092-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S50092-XX-XX.

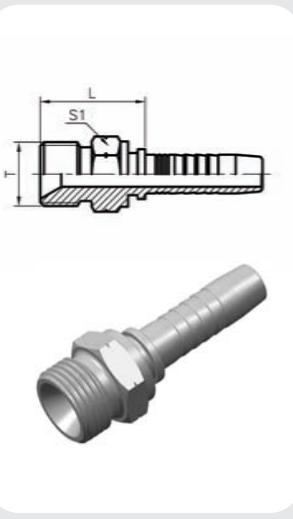S12611英管外螺纹60° 内锥面
BSP MALE 60° CONE SEAT


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S12611-04-04 | G1/4"X19 | 6 | 04 | 24.5 | | 14 |
| S12611-06-05 | G3/8"X19 | 8 | 05 | 27.5 | | 17 |
| S12611-06-06 | G3/8"X19 | 10 | 06 | 27.5 | | 17 |
| S12611-06-08 | G3/8"X19 | 13 | 08 | 26.5 | | 19 |
| S12611-08-06 | G1/2"X14 | 10 | 06 | 30.5 | | 22 |
| S12611-08-08 | G1/2"X14 | 13 | 08 | 31 | | 22 |
| S12611-10-08 | G5/8"X14 | 13 | 08 | 32.5 | | 24 |
| S12611-10-10 | G5/8"X14 | 16 | 10 | 33.5 | | 24 |
| S12611-12-08 | G3/4"X14 | 13 | 08 | 35.5 | | 27 |
| S12611-12-10 | G3/4"X14 | 16 | 10 | 36.5 | | 27 |
| S12611-12-12 | G3/4"X14 | 19 | 12 | 36.5 | | 27 |
| S12611-16-12 | G1"X11 | 19 | 12 | 39.5 | | 36 |
| S12611-16-16 | G1"X11 | 25 | 16 | 41.5 | | 36 |
| S12611-20-16 | G1.1/4"X11 | 25 | 16 | 43.5 | | 46 |
| S12611-20-20 | G1.1/4"X11 | 32 | 20 | 44.5 | | 46 |
| S12611-24-20 | G1.1/2"X11 | 32 | 20 | 46 | | 50 |
| S12611-24-24 | G1.1/2"X11 | 38 | 24 | 46 | | 50 |
| S12611-32-32 | G2"X11 | 51 | 32 | 53.5 | | 65 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S12612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S12612-XX-XX.

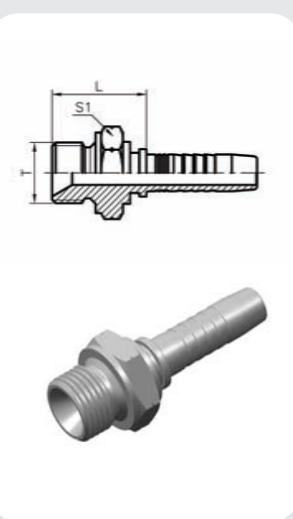S12611A英管外螺纹60° 内锥面或六角端面组合垫密封的双用接头
BSP MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S12611A-04-04 | G1/4"X19 | 6 | 04 | 25.5 | | 19 |
| S12611A-06-05 | G3/8"X19 | 8 | 05 | 27.5 | | 22 |
| S12611A-06-06 | G3/8"X19 | 10 | 06 | 26 | | 22 |
| S12611A-06-08 | G3/8"X19 | 13 | 08 | 28 | | 22 |
| S12611A-08-06 | G1/2"X14 | 10 | 06 | 32 | | 27 |
| S12611A-08-08 | G1/2"X14 | 13 | 08 | 33 | | 27 |
| S12611A-08-10 | G1/2"X14 | 16 | 10 | 34 | | 27 |
| S12611A-10-08 | G5/8"X14 | 13 | 08 | 36 | | 30 |
| S12611A-10-10 | G5/8"X14 | 16 | 10 | 37 | | 30 |
| S12611A-12-08 | G3/4"X14 | 13 | 08 | 35 | | 32 |
| S12611A-12-10 | G3/4"X14 | 16 | 10 | 36 | | 32 |
| S12611A-12-12 | G3/4"X14 | 19 | 12 | 37 | | 32 |
| S12611A-16-12 | G1"X11 | 19 | 12 | 39 | | 41 |
| S12611A-16-16 | G1"X11 | 25 | 16 | 42 | | 41 |
| S12611A-20-16 | G1.1/4"X11 | 25 | 16 | 45 | | 50 |
| S12611A-20-20 | G1.1/4"X11 | 32 | 20 | 45 | | 50 |
| S12611A-24-20 | G1.1/2"X11 | 32 | 20 | 46 | | 55 |
| S12611A-24-24 | G1.1/2"X11 | 38 | 24 | 49 | | 55 |
| S12611A-32-32 | G2"X11 | 51 | 32 | 54.5 | | 70 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S12612A-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S12612A-XX-XX.


S22611英管内螺纹60° 外锥面
BSP FEMALE 60° CONE

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S22611-02-04 | G1/8" X28 | 6 | 04 | 16 | | 14 |
| S22611-04-04 | G1/4" X19 | 6 | 04 | 19 | | 19 |
| S22611-04-05 | G1/4" X19 | 8 | 05 | 19 | | 19 |
| S22611-04-06 | G1/4" X19 | 10 | 06 | 19 | | 19 |
| S22611-06-04T | G3/8" X19 | 6 | 04 | 18 | | 22 |
| S22611-06-05T | G3/8" X19 | 8 | 05 | 19 | | 22 |
| S22611-06-06 | G3/8" X19 | 10 | 06 | 19.5 | | 22 |
| S22611-06-08 | G3/8" X19 | 13 | 08 | 20 | | 22 |
| S22611-08-06T | G1/2" X14 | 10 | 06 | 20.5 | | 27 |
| S22611-08-08 | G1/2" X14 | 13 | 08 | 21.5 | | 27 |
| S22611-10-08T | G5/8" X14 | 13 | 08 | 22.5 | | 30 |
| S22611-10-10 | G5/8" X14 | 16 | 10 | 23 | | 30 |
| S22611-12-10T | G3/4" X14 | 16 | 10 | 23 | | 32 |
| S22611-12-12 | G3/4" X14 | 19 | 12 | 24 | | 32 |
| S22611-16-12T | G1" X11 | 19 | 12 | 24 | | 41 |
| S22611-16-16 | G1" X11 | 25 | 16 | 26 | | 41 |
| S22611-20-16T | G1.1/4" X11 | 25 | 16 | 27.5 | | 50 |
| S22611-20-20 | G1.1/4" X11 | 32 | 20 | 30.5 | | 50 |
| S22611-24-20T | G1.1/2" X11 | 32 | 20 | 32 | | 55 |
| S22611-24-24 | G1.1/2" X11 | 38 | 24 | 31.5 | | 55 |
| S22611-32-24T | G2" X11 | 38 | 24 | 33.5 | | 70 |
| S22611-32-32 | G2" X11 | 51 | 32 | 34 | | 70 |


注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22612-XX-XX.

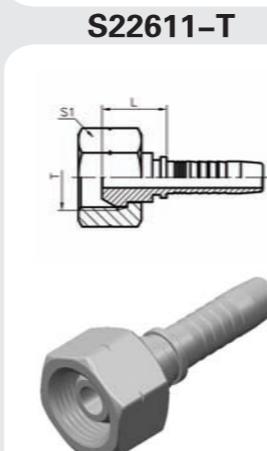

S22641

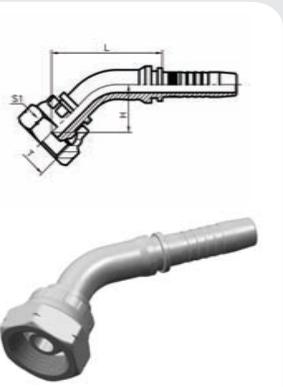

S22641-T




45° 弯英管内螺纹60° 外锥面
45° BSP FEMALE 60° CONE


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S22641-02-04 | G1/8 " X28 | 6 | 04 | 42 | 19.5 | 14 |
| S22641-04-04 | G1/4 " X19 | 6 | 04 | 42.3 | 18 | 19 |
| S22641-04-05 | G1/4 " X19 | 8 | 05 | 46 | 22 | 19 |
| S22641-04-06 | G1/4 " X19 | 10 | 06 | 48.5 | 22 | 19 |
| S22641-06-04T | G3/8 " X19 | 6 | 04 | 41.5 | 18.2 | 22 |
| S22641-06-05T | G3/8 " X19 | 8 | 05 | 46 | 22 | 22 |
| S22641-06-06 | G3/8 " X19 | 10 | 06 | 48 | 22 | 22 |
| S22641-06-08 | G3/8 " X19 | 13 | 08 | 57 | 24.5 | 22 |
| S22641-08-06T | G1/2 " X14 | 10 | 06 | 50 | 24 | 27 |
| S22641-08-08 | G1/2 " X14 | 13 | 08 | 59.3 | 26 | 27 |
| S22641-10-08T | G5/8 " X14 | 13 | 08 | 59 | 26.5 | 30 |
| S22641-10-10 | G5/8 " X14 | 16 | 10 | 71 | 27.8 | 30 |
| S22641-12-10T | G3/4 " X14 | 16 | 10 | 68.5 | 28.8 | 32 |
| S22641-12-12T | G3/4 " X14 | 19 | 12 | 74.5 | 32 | 32 |
| S22641-16-12T | G1 " X11 | 19 | 12 | 75.5 | 32.5 | 41 |
| S22641-16-16T | G1 " X11 | 25 | 16 | 87 | 34 | 41 |
| S22641-20-16T | G1.1/4 " X11 | 25 | 16 | 89 | 36 | 50 |
| S22641-20-20T | G1.1/4 " X11 | 32 | 20 | 101 | 40 | 50 |
| S22641-24-20T | G1.1/2 " X11 | 32 | 20 | 101.5 | 40.8 | 55 |
| S22641-24-24 | G1.1/2 " X11 | 38 | 24 | 117 | 47 | 55 |
| S22641-32-24T | G2 " X11 | 38 | 24 | 119.5 | 50.5 | 70 |
| S22641-32-32 | G2 " X11 | 51 | 32 | 137 | 56.2 | 70 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S26412-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S26412-XX-XX.

S22691





S22691-T

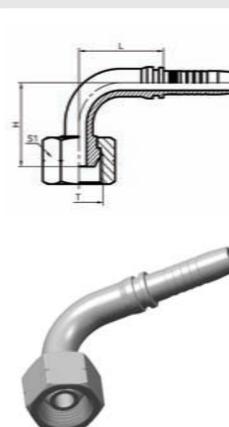

90° 弯英管内螺纹60° 外锥面
90° BSP FEMALE 60° CONE

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|-------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S22691-02-04 | G1/8 " X28 | 6 | 04 | 30 | 29 | 14 |
| S22691-04-04 | G1/4 " X19 | 6 | 04 | 32 | 30 | 19 |
| S22691-04-05 | G1/4 " X19 | 8 | 05 | 33 | 40 | 19 |
| S22691-04-06 | G1/4 " X19 | 10 | 06 | 36.5 | 42 | 19 |
| S22691-06-04T | G3/8 " X19 | 6 | 04 | 30 | 33 | 22 |
| S22691-06-05T | G3/8 " X19 | 8 | 05 | 30 | 39 | 22 |
| S22691-06-06 | G3/8 " X19 | 10 | 06 | 36.5 | 42 | 22 |
| S22691-06-08 | G3/8 " X19 | 13 | 08 | 43.5 | 58.5 | 22 |
| S22691-08-06T | G1/2 " X14 | 10 | 06 | 36.5 | 44.5 | 27 |
| S22691-08-08 | G1/2 " X14 | 13 | 08 | 43.5 | 50 | 27 |
| S22691-10-08T | G5/8 " X14 | 13 | 08 | 43.5 | 50.5 | 30 |
| S22691-10-10 | G5/8 " X14 | 16 | 10 | 56 | 55 | 30 |
| S22691-12-10T | G3/4 " X14 | 16 | 10 | 56 | 56.5 | 32 |
| S22691-12-12 | G3/4 " X14 | 19 | 12 | 64 | 65 | 32 |
| S22691-16-12T | G1 " X11 | 19 | 12 | 64 | 61 | 41 |
| S22691-16-16 | G1 " X11 | 25 | 16 | 74 | 74 | 41 |
| S22691-20-16T | G1.1/4 " X11 | 25 | 16 | 73 | 77 | 50 |
| S22691-20-20 | G1.1/4 " X11 | 32 | 20 | 92 | 90 | 50 |
| S22691-24-20T | G1.1/2 " X11 | 32 | 20 | 92 | 88.5 | 55 |
| S22691-24-24 | G1.1/2 " X11 | 38 | 24 | 110 | 105 | 55 |
| S22691-32-24T | G2 " X11 | 38 | 24 | 109 | 108 | 70 |
| S22691-32-32 | G2 " X11 | 51 | 32 | 128 | 128.5 | 70 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22692-XX-XX.

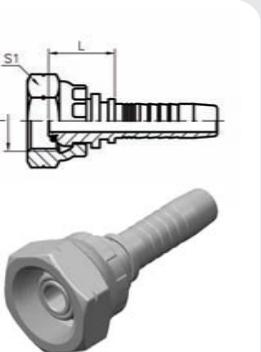
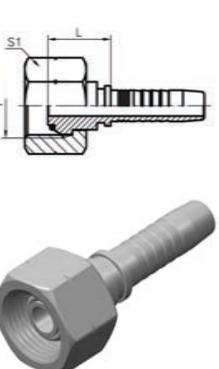
S22611-OR**S22611-ORT****D**

扣压式

英管内螺纹60° 外锥面带O形圈
BSP FEMALE 60° O-RING CONE

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|---------------|---|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S22611-02-04OR | G1/8" X28 | 6 | 04 | 15 | | 14 |
| S22611-04-04OR | G1/4" X19 | 6 | 04 | 19 | | 19 |
| S22611-04-05OR | G1/4" X19 | 8 | 05 | 19 | | 19 |
| S22611-04-06OR | G1/4" X19 | 10 | 06 | 19 | | 19 |
| S22611-06-04ORT | G3/8" X19 | 6 | 04 | 18 | | 22 |
| S22611-06-05ORT | G3/8" X19 | 8 | 05 | 19 | | 22 |
| S22611-06-06OR | G3/8" X19 | 10 | 06 | 19.5 | | 22 |
| S22611-06-08OR | G3/8" X19 | 13 | 08 | 20 | | 22 |
| S22611-08-06ORT | G1/2" X14 | 10 | 06 | 21 | | 27 |
| S22611-08-08OR | G1/2" X14 | 13 | 08 | 21.5 | | 27 |
| S22611-10-08ORT | G5/8" X14 | 13 | 08 | 21.5 | | 30 |
| S22611-10-10OR | G5/8" X14 | 16 | 10 | 23 | | 30 |
| S22611-12-10ORT | G3/4" X14 | 16 | 10 | 23 | | 32 |
| S22611-12-12OR | G3/4" X14 | 19 | 12 | 24 | | 32 |
| S22611-16-12ORT | G1" X11 | 19 | 12 | 25 | | 41 |
| S22611-16-16OR | G1" X11 | 25 | 16 | 27 | | 41 |
| S22611-20-16ORT | G1.1/4" X11 | 25 | 16 | 28.5 | | 50 |
| S22611-20-20OR | G1.1/4" X11 | 32 | 20 | 30.5 | | 50 |
| S22611-24-20ORT | G1.1/2" X11 | 32 | 20 | 32 | | 55 |
| S22611-24-24OR | G1.1/2" X11 | 38 | 24 | 31.5 | | 55 |
| S22611-32-24ORT | G2" X11 | 38 | 24 | 33.5 | | 70 |
| S22611-32-32OR | G2" X11 | 51 | 32 | 34 | | 70 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22612-XX-XX.

S22641-OR**S22641-ORT****D**

扣压式

45° 弯英管内螺纹60° 外锥面带O形圈
45° BSP FEMALE 60° O-RING CONE


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|---------------|-------|------|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S22641-02-04OR | G1/8" X28 | 6 | 04 | | 42 | 19.5 |
| S22641-04-04OR | G1/4" X19 | 6 | 04 | | 41.5 | 20.2 |
| S22641-04-05OR | G1/4" X19 | 8 | 05 | | 46 | 22 |
| S22641-04-06OR | G1/4" X19 | 10 | 06 | | 48.5 | 22 |
| S22641-06-04ORT | G3/8" X19 | 6 | 04 | | 41.5 | 18.2 |
| S22641-06-05ORT | G3/8" X19 | 8 | 05 | | 46 | 22 |
| S22641-06-06OR | G3/8" X19 | 10 | 06 | | 48.2 | 22.2 |
| S22641-06-08OR | G3/8" X19 | 13 | 08 | | 57 | 24 |
| S22641-08-06ORT | G1/2" X14 | 10 | 06 | | 50 | 24 |
| S22641-08-08OR | G1/2" X14 | 13 | 08 | | 58.3 | 25.8 |
| S22641-10-08ORT | G5/8" X14 | 13 | 08 | | 59 | 26.5 |
| S22641-10-10OR | G5/8" X14 | 16 | 10 | | 67.4 | 27.7 |
| S22641-12-10ORT | G3/4" X14 | 16 | 10 | | 68.5 | 28.8 |
| S22641-12-12OR | G3/4" X14 | 19 | 12 | | 74.6 | 32 |
| S22641-16-12ORT | G1" X11 | 19 | 12 | | 75.5 | 32.5 |
| S22641-16-16OR | G1" X11 | 25 | 16 | | 86.4 | 34 |
| S22641-20-16ORT | G1.1/4" X11 | 25 | 16 | | 87 | 34 |
| S22641-20-20OR | G1.1/4" X11 | 32 | 20 | | 101 | 40 |
| S22641-24-20ORT | G1.1/2" X11 | 32 | 20 | | 101 | 40 |
| S22641-32-24ORT | G2" X11 | 38 | 24 | | 118 | 49 |
| S22641-32-32OR | G2" X11 | 51 | 32 | | 136.2 | 56.4 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22642-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22642-XX-XX.




| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|-----------------|-----------------|--------------|---------|------------------|------|------|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S22691-02-04OR | G1/8 " X28 | 6 | 04 | | 32 | 34 | 14 |
| S22691-04-04OR | G1/4 " X19 | 6 | 04 | | 32 | 36 | 19 |
| S22691-04-05OR | G1/4 " X19 | 8 | 05 | | 33 | 40 | 19 |
| S22691-04-06OR | G1/4 " X19 | 10 | 06 | | 36.5 | 42 | 19 |
| S22691-06-04ORT | G3/8 " X19 | 6 | 04 | | 32 | 35 | 22 |
| S22691-06-05ORT | G3/8 " X19 | 8 | 05 | | 33 | 39 | 22 |
| S22691-06-06OR | G3/8 " X19 | 10 | 06 | | 36.5 | 42 | 22 |
| S22691-06-08OR | G3/8 " X19 | 13 | 08 | | 43.5 | 47.5 | 22 |
| S22691-08-06ORT | G1/2 " X14 | 10 | 06 | | 36.5 | 44.5 | 27 |
| S22691-08-08OR | G1/2 " X14 | 13 | 08 | | 43.5 | 50.5 | 27 |
| S22691-10-08ORT | G5/8 " X14 | 13 | 08 | | 43.5 | 49.5 | 30 |
| S22691-10-10OR | G5/8 " X14 | 16 | 10 | | 56 | 55 | 30 |
| S22691-12-10ORT | G3/4 " X14 | 16 | 10 | | 55 | 56.5 | 32 |
| S22691-12-12OR | G3/4 " X14 | 19 | 12 | | 64 | 64.5 | 32 |
| S22691-16-12ORT | G1 " X11 | 19 | 12 | | 64 | 61 | 41 |
| S22691-16-16OR | G1 " X11 | 25 | 16 | | 74 | 74 | 41 |
| S22691-20-16ORT | G1.1/4 " X11 | 25 | 16 | | 74 | 77 | 50 |
| S22691-20-20OR | G1.1/4 " X11 | 32 | 20 | | 91.5 | 90 | 50 |
| S22691-24-20ORT | G1.1/2 " X11 | 32 | 20 | | 91.5 | 88.5 | 55 |
| S22691-24-24OR | G1.1/2 " X11 | 38 | 24 | | 109 | 105 | 55 |
| S22691-32-24ORT | G2 " X11 | 38 | 24 | | 109 | 103 | 70 |
| S22691-32-32OR | G2 " X11 | 51 | 32 | | 129 | 130 | 70 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22692-XX-XX.

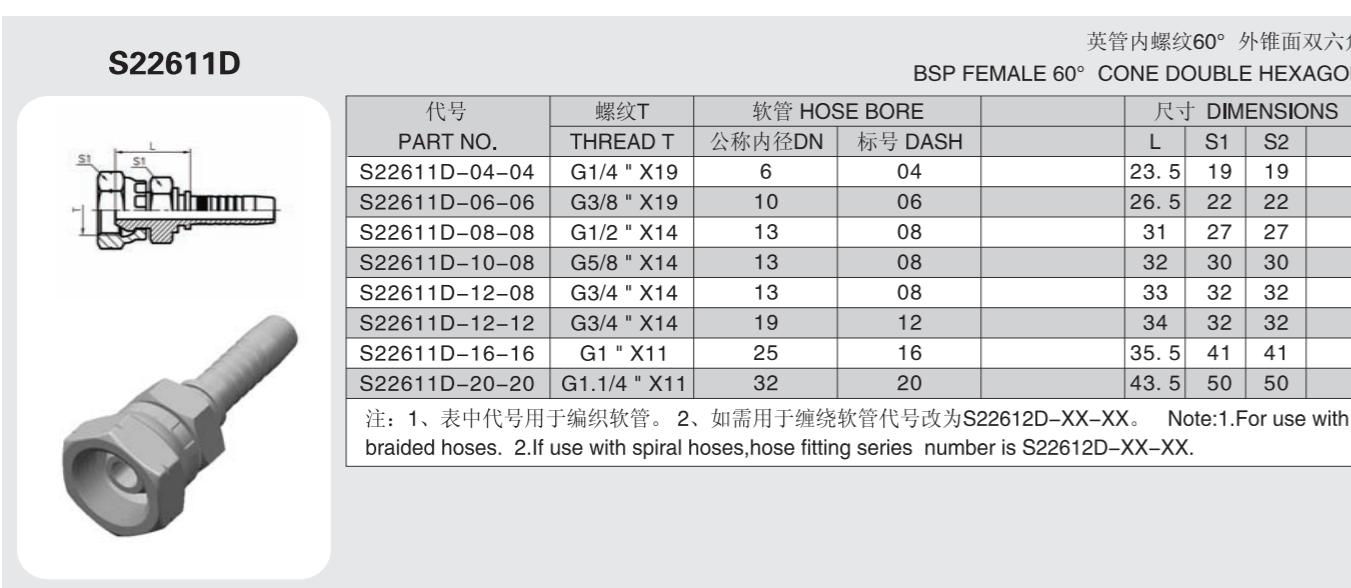


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|-----------------|--------------|---------|------------------|------|----|----|
| | | 公称内径DN | 标号 DASH | | L | S1 | S2 |
| S22611D-04-04 | G1/4 " X19 | 6 | 04 | | 23.5 | 19 | 19 |
| S22611D-06-06 | G3/8 " X19 | 10 | 06 | | 26.5 | 22 | 22 |
| S22611D-08-08 | G1/2 " X14 | 13 | 08 | | 31 | 27 | 27 |
| S22611D-10-08 | G5/8 " X14 | 13 | 08 | | 32 | 30 | 30 |
| S22611D-12-08 | G3/4 " X14 | 13 | 08 | | 33 | 32 | 32 |
| S22611D-12-12 | G3/4 " X14 | 19 | 12 | | 34 | 32 | 32 |
| S22611D-16-16 | G1 " X11 | 25 | 16 | | 35.5 | 41 | 41 |
| S22611D-20-20 | G1.1/4 " X11 | 32 | 20 | | 43.5 | 50 | 50 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22612D-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22612D-XX-XX.

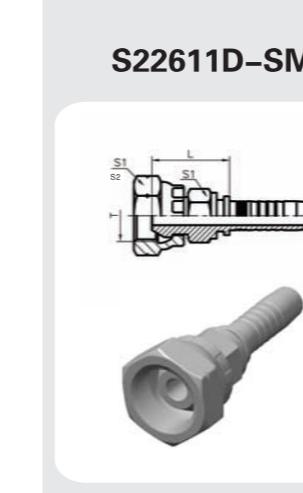

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|-----------------|-----------------|--------------|---------|------------------|------|----|----|
| | | 公称内径DN | 标号 DASH | | L | S1 | S2 |
| S22611D-04-04SM | G1/4 " X19 | 6 | 04 | | 23 | 14 | 19 |
| S22611D-06-06SM | G3/8 " X19 | 10 | 06 | | 25 | 17 | 22 |
| S22611D-08-08SM | G1/2 " X14 | 13 | 08 | | 28.5 | 22 | 27 |
| S22611D-10-08SM | G5/8 " X14 | 13 | 08 | | 30 | 22 | 30 |
| S22611D-12-08SM | G3/4 " X14 | 13 | 08 | | 31.5 | 27 | 32 |
| S22611D-12-12SM | G3/4 " X14 | 19 | 12 | | 32.5 | 27 | 32 |
| S22611D-16-16SM | G1 " X11 | 25 | 16 | | 36.3 | 32 | 41 |
| S22611D-20-20SM | G1.1/4 " X11 | 32 | 20 | | 41.5 | 41 | 50 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22612D-XX-XXSM。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22612D-XX-XXSM.

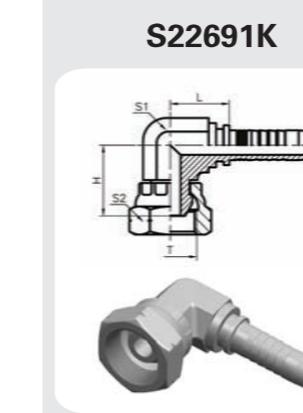

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | |
|----------------|-----------------|--------------|---------|------------------|------|------|----|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 | S2 |
| S22691K-04-04 | G1/4 " X19 | 6 | 04 | | 17.5 | 22 | 14 | 19 |
| S22691K-06-04 | G3/8 " X19 | 6 | 04 | | 20 | 24 | 16 | 22 |
| S22691K-06-05 | G3/8 " X19 | 8 | 05 | | 20 | 24 | 16 | 22 |
| S22691K-06-06 | G3/8 " X19 | 10 | 06 | | 20 | 24 | 16 | 22 |
| S22691K-08-06 | G1/2 " X14 | 10 | 06 | | 23 | 26.5 | 19 | 27 |
| S22691K-08-08 | G1/2 " X14 | 13 | 08 | | 23.5 | 28.5 | 19 | 27 |
| S22691K-10-10 | G5/8 " X14 | 16 | 10 | | 25 | 29.5 | 22 | 30 |
| S22691K-12-12 | G3/4 " X14 | 19 | 12 | | 27.5 | 33 | 27 | 32 |
| S22691K-16-16 | G1 " X11 | 25 | 16 | | 32.5 | 38.1 | 33 | 41 |

S13011

英锥管外螺纹
BSPT MALE

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S13011-02-04 | R1/8"X28 | 6 | 04 | 18.5 | | 12 |
| S13011-04-04 | R1/4"X19 | 6 | 04 | 21 | | 17 |
| S13011-04-05 | R1/4"X19 | 8 | 05 | 21 | | 17 |
| S13011-04-06 | R1/4"X19 | 10 | 06 | 21 | | 17 |
| S13011-06-04 | R3/8"X19 | 6 | 04 | 21.1 | | 17 |
| S13011-06-05 | R3/8"X19 | 8 | 05 | 21.1 | | 17 |
| S13011-06-06 | R3/8"X19 | 10 | 06 | 21.1 | | 17 |
| S13011-06-08 | R3/8"X19 | 13 | 08 | 23.6 | | 19 |
| S13011-08-06 | R1/2"X14 | 10 | 06 | 26.3 | | 22 |
| S13011-08-08 | R1/2"X14 | 13 | 08 | 26.8 | | 22 |
| S13011-08-10 | R1/2"X14 | 16 | 10 | 26.8 | | 22 |
| S13011-08-12 | R1/2"X14 | 19 | 12 | 29.8 | | 27 |
| S13011-12-08 | R3/4"X14 | 13 | 08 | 27.5 | | 27 |
| S13011-12-10 | R3/4"X14 | 16 | 10 | 28.5 | | 27 |
| S13011-12-12 | R3/4"X14 | 19 | 12 | 29.3 | | 27 |
| S13011-12-16 | R3/4"X14 | 25 | 16 | 30 | | 32 |
| S13011-16-12 | R1"X11 | 19 | 12 | 35.1 | | 36 |
| S13011-16-16 | R1"X11 | 25 | 16 | 36.1 | | 36 |
| S13011-20-20 | R1.1/4"X11 | 32 | 20 | 36.8 | | 46 |
| S13011-24-24 | R1.1/2"X11 | 38 | 24 | 38.8 | | 50 |
| S13011-32-24 | R2"X11 | 38 | 24 | 42.1 | | 65 |
| S13011-32-32 | R2"X11 | 51 | 32 | 42.1 | | 65 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S13012-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S13012-XX-XX.


S22111

英管内螺纹球面
BSP FEMALE MULTISEAL


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S22111-02-04 | G1/8"X28 | 6 | 04 | 17.5 | | 14 |
| S22111-04-04 | G1/4"X19 | 6 | 04 | 19.5 | | 19 |
| S22111-06-05T | G3/8"X19 | 8 | 05 | 20 | | 22 |
| S22111-06-06 | G3/8"X19 | 10 | 06 | 20.5 | | 22 |
| S22111-06-08 | G3/8"X19 | 13 | 08 | 21 | | 22 |
| S22111-08-06T | G1/2"X14 | 10 | 06 | 23 | | 27 |
| S22111-08-08 | G1/2"X14 | 13 | 08 | 24 | | 27 |
| S22111-08-10 | G1/2"X14 | 16 | 10 | 24.5 | | 27 |
| S22111-10-08T | G5/8"X14 | 13 | 08 | 24 | | 30 |
| S22111-10-10 | G5/8"X14 | 16 | 10 | 25 | | 30 |
| S22111-10-12 | G5/8"X14 | 19 | 12 | 25 | | 30 |
| S22111-12-10T | G3/4"X14 | 16 | 10 | 26 | | 32 |
| S22111-12-12 | G3/4"X14 | 19 | 12 | 26 | | 32 |
| S22111-16-12T | G1"X11 | 19 | 12 | 27 | | 41 |
| S22111-16-16 | G1"X11 | 25 | 16 | 28 | | 41 |
| S22111-20-16T | G1.1/4"X11 | 25 | 16 | 28 | | 50 |
| S22111-20-20 | G1.1/4"X11 | 32 | 20 | 31.5 | | 50 |
| S22111-24-20T | G1.1/2"X11 | 32 | 20 | 33 | | 55 |
| S22111-24-24 | G1.1/2"X11 | 38 | 24 | 33 | | 55 |
| S22111-32-24T | G2"X11 | 38 | 24 | 35 | | 70 |
| S22111-32-32 | G2"X11 | 51 | 32 | 35 | | 70 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22112-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22112-XX-XX.

S22141




S22141-T

45° 弯英管内螺纹球面
45° BSP FEMALE MULTISEAL

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S22141-02-04 | G1/8" X28 | 6 | 04 | 43 | 21.6 | 14 |
| S22141-04-04 | G1/4" X19 | 6 | 04 | 43 | 21.6 | 19 |
| S22141-06-05T | G3/8" X19 | 8 | 05 | 46 | 22.9 | 22 |
| S22141-06-06 | G3/8" X19 | 10 | 06 | 50 | 23.9 | 22 |
| S22141-06-08 | G3/8" X19 | 13 | 08 | 58 | 25.5 | 22 |
| S22141-08-06T | G1/2" X14 | 10 | 06 | 51 | 25 | 27 |
| S22141-08-08 | G1/2" X14 | 13 | 08 | 61 | 26.8 | 27 |
| S22141-08-10 | G1/2" X14 | 16 | 10 | 68 | 28 | 27 |
| S22141-10-08T | G5/8" X14 | 13 | 08 | 60 | 27.5 | 30 |
| S22141-10-10 | G5/8" X14 | 16 | 10 | 68.5 | 28.8 | 30 |
| S22141-10-12 | G5/8" X14 | 19 | 12 | 74.5 | 32 | 30 |
| S22141-12-10T | G3/4" X14 | 16 | 10 | 67 | 27 | 32 |
| S22141-12-12 | G3/4" X14 | 19 | 12 | 76 | 33.7 | 32 |
| S22141-16-12T | G1" X11 | 19 | 12 | 81.6 | 33 | 41 |
| S22141-16-16 | G1" X11 | 25 | 16 | 88 | 35.1 | 41 |
| S22141-20-16T | G1.1/4" X11 | 25 | 16 | 89.5 | 36.5 | 50 |
| S22141-20-20 | G1.1/4" X11 | 32 | 20 | 101.5 | 40.8 | 50 |
| S22141-24-20T | G1.1/2" X11 | 32 | 20 | 104 | 43 | 55 |
| S22141-24-24 | G1.1/2" X11 | 38 | 24 | 117.5 | 48.2 | 55 |
| S22141-32-24T | G2" X11 | 38 | 24 | 120 | 51 | 70 |
| S22141-32-32 | G2" X11 | 51 | 32 | 138 | 57 | 70 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22142-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22142-XX-XX.

S22191




S22191-T

90° 弯英管内螺纹球面
90° BSP FEMALE MULTISEAL

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|-------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S22191-02-04 | G1/8" X28 | 6 | 04 | 30.5 | 33 | 14 |
| S22191-04-04 | G1/4" X19 | 6 | 04 | 30.5 | 37 | 19 |
| S22191-06-05T | G3/8" X19 | 8 | 05 | 33 | 41.5 | 22 |
| S22191-06-06 | G3/8" X19 | 10 | 06 | 36.5 | 43.5 | 22 |
| S22191-06-08 | G3/8" X19 | 13 | 08 | 43.5 | 49 | 22 |
| S22191-08-06T | G1/2" X14 | 10 | 06 | 36.5 | 46 | 27 |
| S22191-08-08 | G1/2" X14 | 13 | 08 | 43.5 | 51.5 | 27 |
| S22191-08-10 | G1/2" X14 | 16 | 10 | 55 | 56 | 27 |
| S22191-10-08T | G5/8" X14 | 13 | 08 | 43.5 | 52 | 30 |
| S22191-10-10 | G5/8" X14 | 16 | 10 | 55 | 56.5 | 30 |
| S22191-10-12 | G5/8" X14 | 19 | 12 | 64 | 64.5 | 30 |
| S22191-12-10T | G3/4" X14 | 16 | 10 | 55 | 58.5 | 32 |
| S22191-12-12 | G3/4" X14 | 19 | 12 | 63 | 66.5 | 32 |
| S22191-16-12T | G1" X11 | 19 | 12 | 63 | 67.5 | 41 |
| S22191-16-16 | G1" X11 | 25 | 16 | 74 | 74.5 | 41 |
| S22191-20-16T | G1.1/4" X11 | 25 | 16 | 74 | 76.5 | 50 |
| S22191-20-20 | G1.1/4" X11 | 32 | 20 | 91.5 | 89 | 50 |
| S22191-24-20T | G1.1/2" X11 | 32 | 20 | 91.5 | 92.5 | 55 |
| S22191-24-24 | G1.1/2" X11 | 38 | 24 | 109 | 106 | 55 |
| S22191-32-24T | G2" X11 | 38 | 24 | 109 | 105 | 70 |
| S22191-32-32 | G2" X11 | 51 | 32 | 129 | 125.5 | 70 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S22192-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S22192-XX-XX.


S28611

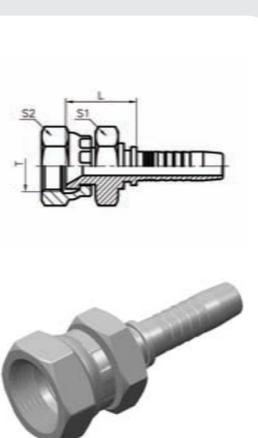日本公制内螺纹60° 内锥面
JIS METRIC FEMALE 60° CONE SEAT

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | L | S1 | S2 |
| S28611-12-04 | M12X1.5 | 6 | 04 | 20.5 | 17 | 17 |
| S28611-14-04 | M14X1.5 | 6 | 04 | 21 | 19 | 19 |
| S28611-14-06 | M14X1.5 | 10 | 06 | 21 | 19 | 19 |
| S28611-16-04 | M16X1.5 | 6 | 04 | 24 | 22 | 22 |
| S28611-16-05 | M16X1.5 | 8 | 05 | 24 | 22 | 22 |
| S28611-16-06 | M16X1.5 | 10 | 06 | 24 | 22 | 22 |
| S28611-18-06 | M18X1.5 | 10 | 06 | 25 | 24 | 24 |
| S28611-18-08 | M18X1.5 | 13 | 08 | 25.5 | 24 | 24 |
| S28611-20-08 | M20X1.5 | 13 | 08 | 28.5 | 27 | 27 |
| S28611-22-08 | M22X1.5 | 13 | 08 | 25.5 | 27 | 27 |
| S28611-24-08 | M24X1.5 | 13 | 08 | 28 | 32 | 32 |
| S28611-24-10 | M24X1.5 | 16 | 10 | 28.5 | 32 | 32 |
| S28611-27-10 | M27X1.5 | 16 | 10 | 28.5 | 32 | 32 |
| S28611-30-12 | M30X1.5 | 19 | 12 | 28.5 | 36 | 36 |
| S28611-33-12 | M33X1.5 | 19 | 12 | 31 | 41 | 41 |
| S28611-33-16 | M33X1.5 | 25 | 16 | 32 | 41 | 41 |
| S28611-36-20 | M36X1.5 | 32 | 20 | 35.5 | 46 | 46 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S28612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S28612-XX-XX.


S28611GM

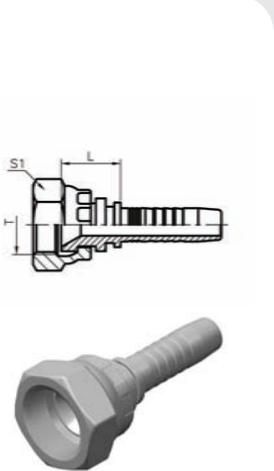日本公制内螺纹60° 内锥面
JIS METRIC FEMALE 60° CONE SEAT

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | |
|----------------|-----------------|--------------|---------|------------------|------|---|----|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 | S2 |
| S28611GM-12-04 | M12X1.5 | 6 | 04 | | 20 | | 17 | |
| S28611GM-14-04 | M14X1.5 | 6 | 04 | | 21 | | 19 | |
| S28611GM-14-06 | M14X1.5 | 10 | 06 | | 21 | | 19 | |
| S28611GM-16-04 | M16X1.5 | 6 | 04 | | 24 | | 22 | |
| S28611GM-16-05 | M16X1.5 | 8 | 05 | | 24 | | 22 | |
| S28611GM-16-06 | M16X1.5 | 10 | 06 | | 24 | | 22 | |
| S28611GM-18-06 | M18X1.5 | 10 | 06 | | 25 | | 24 | |
| S28611GM-18-08 | M18X1.5 | 13 | 08 | | 24.5 | | 24 | |
| S28611GM-20-08 | M20X1.5 | 13 | 08 | | 28.5 | | 27 | |
| S28611GM-22-08 | M22X1.5 | 13 | 08 | | 25.5 | | 27 | |
| S28611GM-24-08 | M24X1.5 | 13 | 08 | | 27.5 | | 32 | |
| S28611GM-24-10 | M24X1.5 | 16 | 10 | | 28.5 | | 32 | |
| S28611GM-27-10 | M27X1.5 | 16 | 10 | | 28.5 | | 32 | |
| S28611GM-30-12 | M30X1.5 | 19 | 12 | | 28.5 | | 36 | |
| S28611GM-33-12 | M33X1.5 | 19 | 12 | | 31 | | 41 | |
| S28611GM-33-16 | M33X1.5 | 25 | 16 | | 32 | | 41 | |
| S28611GM-36-20 | M36X1.5 | 32 | 20 | | 35.5 | | 46 | |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S28612GM-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S28612GM-XX-XX.


S28691

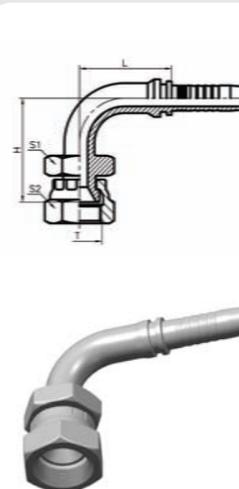90°弯日本公制内螺纹60° 内锥面
90°JIS METRIC FEMALE 60° CONE SEAT

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | | |
|----------------|-----------------|--------------|---------|------------------|---|------|------|----|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 | S2 | |
| S28691-12-04 | M12X1.5 | 6 | 04 | | | 30 | 29.5 | 17 | 17 |
| S28691-14-04 | M14X1.5 | 6 | 04 | | | 30 | 30 | 19 | 19 |
| S28691-14-06 | M14X1.5 | 10 | 06 | | | 36.5 | 28 | 19 | 19 |
| S28691-16-04T | M16X1.5 | 6 | 04 | | | 30 | 28 | 22 | 22 |
| S28691-16-05 | M16X1.5 | 8 | 05 | | | 36.5 | 37.5 | 22 | 22 |
| S28691-16-06 | M16X1.5 | 10 | 06 | | | 36.5 | 39 | 22 | 22 |
| S28691-18-06 | M18X1.5 | 10 | 06 | | | 36.5 | 41 | 24 | 24 |
| S28691-18-08 | M18X1.5 | 13 | 08 | | | 43.5 | 46.5 | 24 | 24 |
| S28691-22-08 | M22X1.5 | 13 | 08 | | | 43.5 | 47 | 27 | 27 |
| S28691-24-08 | M24X1.5 | 13 | 08 | | | 43.5 | 48.5 | 32 | 32 |
| S28691-24-10 | M24X1.5 | 16 | 10 | | | 55 | 53 | 32 | 32 |
| S28691-30-12 | M30X1.5 | 19 | 12 | | | 64 | 62 | 36 | 36 |
| S28691-33-12 | M33X1.5 | 19 | 12 | | | 64 | 70 | 41 | 41 |
| S28691-33-16 | M33X1.5 | 25 | 16 | | | 74 | 77 | 41 | 41 |
| S28691-36-20 | M36X1.5 | 32 | 20 | | | 91.5 | 92 | 46 | 46 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S28692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S28692-XX-XX.


S28641

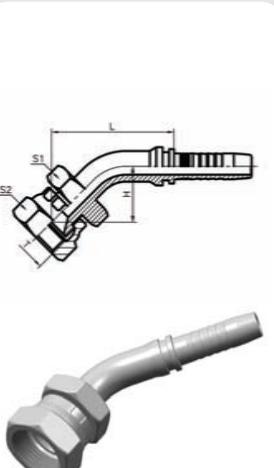45°弯日本公制内螺纹60° 内锥面
45° JIS METRIC FEMALE 60° CONE SEAT

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | |
|----------------|-----------------|--------------|---------|------------------|------|------|----|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 | S2 |
| S28641-12-04 | M12X1.5 | 6 | 04 | | 42.5 | 19 | 17 | 17 |
| S28641-14-04 | M14X1.5 | 6 | 04 | | 42.5 | 19 | 19 | 19 |
| S28641-14-06 | M14X1.5 | 10 | 06 | | 49 | 23 | 19 | 19 |
| S28641-16-04 | M16X1.5 | 6 | 04 | | 45 | 21.5 | 22 | 22 |
| S28641-16-05 | M16X1.5 | 8 | 05 | | 49 | 25.5 | 22 | 22 |
| S28641-16-06 | M16X1.5 | 10 | 06 | | 51.5 | 25.5 | 22 | 22 |
| S28641-18-06 | M18X1.5 | 10 | 06 | | 52 | 26 | 24 | 24 |
| S28641-18-08 | M18X1.5 | 13 | 08 | | 61 | 28.5 | 24 | 24 |
| S28641-22-08 | M22X1.5 | 13 | 08 | | 61 | 28.5 | 27 | 27 |
| S28641-24-08 | M24X1.5 | 13 | 08 | | 62.5 | 30 | 32 | 32 |
| S28641-24-10 | M24X1.5 | 16 | 10 | | 71 | 31 | 32 | 32 |
| S28641-30-12 | M30X1.5 | 19 | 12 | | 77 | 34 | 36 | 36 |
| S28641-33-12 | M33X1.5 | 19 | 12 | | 78.5 | 36 | 41 | 41 |
| S28641-33-16 | M33X1.5 | 25 | 16 | | 90 | 37 | 41 | 41 |
| S28641-36-20 | M36X1.5 | 32 | 20 | | 104 | 43.5 | 46 | 46 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S28642-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S28642-XX-XX.


S29611

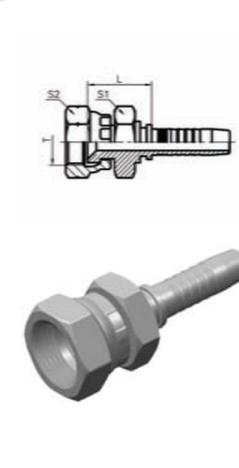日本英制内螺纹60° 内锥面
JIS GAS FEMALE 60° CONE
SEAT JIS B8363

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | | |
|----------------|-----------------|--------------|---------|------------------|---|------|----|----|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 | S2 | |
| S29611-04-04 | G1/4 " X19 | 6 | 04 | | | 21 | | 19 | 19 |
| S29611-04-05 | G1/4 " X19 | 8 | 05 | | | 21 | | 19 | 19 |
| S29611-06-04 | G3/8 " X19 | 6 | 04 | | | 23.5 | | 22 | 22 |
| S29611-06-06 | G3/8 " X19 | 10 | 06 | | | 23 | | 22 | 22 |
| S29611-08-06 | G1/2 " X14 | 10 | 06 | | | 26 | | 27 | 27 |
| S29611-08-08 | G1/2 " X14 | 13 | 08 | | | 26.5 | | 27 | 27 |
| S29611-10-10 | G5/8 " X14 | 16 | 10 | | | 31 | | 30 | 30 |
| S29611-12-10 | G3/4 " X14 | 16 | 10 | | | 31.5 | | 32 | 32 |
| S29611-12-12 | G3/4 " X14 | 19 | 12 | | | 31.5 | | 32 | 32 |
| S29611-16-16 | G1 " X11 | 25 | 16 | | | 32 | | 41 | 41 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S29612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S29612-XX-XX.

S29641

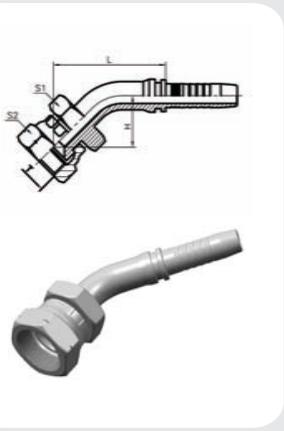


45° 弯日本英制内螺纹60° 内锥面
45° JIS GAS FEMALE 60° CONE
SEAT JIS B8363

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|-----------------|--------------|---------|---------------|------|----|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 | S2 |
| S29641-04-04 | G1/4 " X19 | 6 | 04 | 42.5 | 19.5 | 19 | 19 |
| S29641-04-05 | G1/4 " X19 | 8 | 05 | 47 | 23 | 19 | 19 |
| S29641-06-04 | G3/8 " X19 | 6 | 04 | 44.5 | 21 | 22 | 22 |
| S29641-06-06 | G3/8 " X19 | 10 | 06 | 51 | 25 | 22 | 22 |
| S29641-08-06 | G1/2 " X14 | 10 | 06 | 53 | 27 | 27 | 27 |
| S29641-08-08 | G1/2 " X14 | 13 | 08 | 61.5 | 29 | 27 | 27 |
| S29641-10-10 | G5/8 " X14 | 16 | 10 | 72.5 | 32.5 | 30 | 30 |
| S29641-12-10 | G3/4 " X14 | 16 | 10 | 72.5 | 33 | 32 | 32 |
| S29641-12-12 | G3/4 " X14 | 19 | 12 | 79 | 36 | 32 | 32 |
| S29641-16-16 | G1 " X11 | 25 | 16 | 90 | 37 | 41 | 41 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S29642-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S29642-XX-XX.

S29691

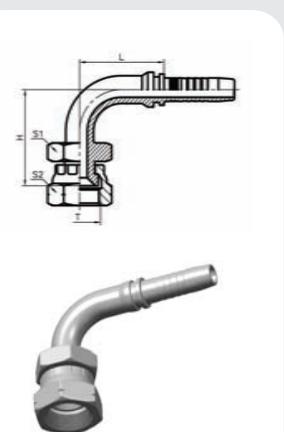


90° 弯日本英制内螺纹60° 内锥面
90° JIS GAS FEMALE 60° CONE
SEAT JIS B8363

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|-----------------|--------------|---------|---------------|------|----|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 | S2 |
| S29691-04-04 | G1/4 " X19 | 6 | 04 | 30.5 | 36 | 19 | 19 |
| S29691-04-05 | G1/4 " X19 | 8 | 05 | 33 | 39.5 | 19 | 19 |
| S29691-06-04 | G3/8 " X19 | 6 | 04 | 30.5 | 37 | 22 | 22 |
| S29691-06-06 | G3/8 " X19 | 10 | 06 | 36.5 | 44 | 22 | 22 |
| S29691-08-06 | G1/2 " X14 | 10 | 06 | 36.5 | 46 | 27 | 27 |
| S29691-08-08 | G1/2 " X14 | 13 | 08 | 44 | 51.5 | 27 | 27 |
| S29691-10-10 | G5/8 " X14 | 16 | 10 | 55 | 59 | 30 | 30 |
| S29691-12-10 | G3/4 " X14 | 16 | 10 | 55 | 57.5 | 32 | 32 |
| S29691-12-12 | G3/4 " X14 | 19 | 12 | 63 | 65.5 | 32 | 32 |
| S29691-16-16 | G1 " X11 | 25 | 16 | 74 | 74.5 | 41 | 41 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S29692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S29692-XX-XX.

S15611

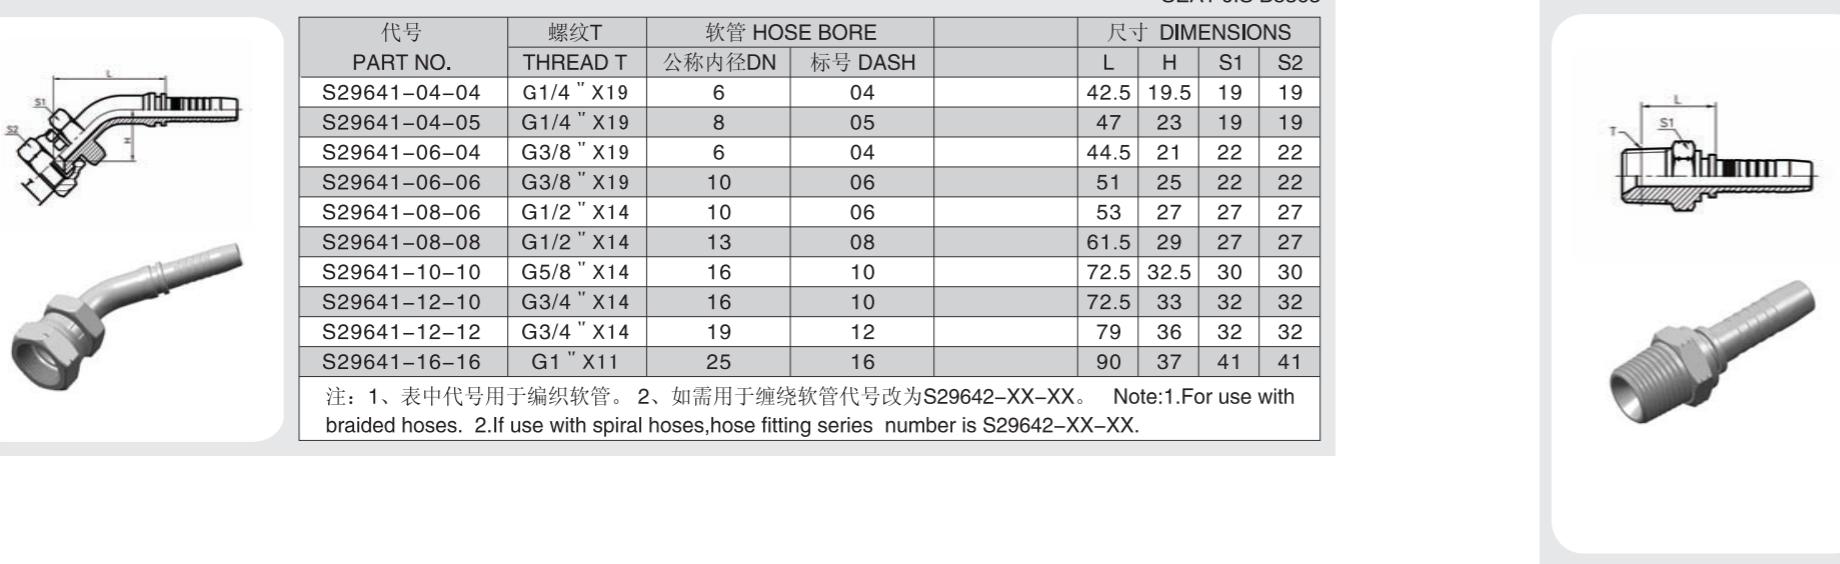


布锥管外螺纹
NPT MALE

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|------------------|--------------|---------|---------------|--|--|----|
| | | 公称内径DN | 标号 DASH | L | | | S1 |
| S15611-02-04 | NPT1/8 " X27 | 6 | 04 | 18.5 | | | 12 |
| S15611-04-04 | NPT1/4 " X18 | 6 | 04 | 22.5 | | | 17 |
| S15611-04-05 | NPT1/4 " X18 | 8 | 05 | 22.5 | | | 17 |
| S15611-04-06 | NPT1/4 " X18 | 10 | 06 | 22.5 | | | 17 |
| S15611-06-04 | NPT3/8 " X18 | 6 | 04 | 23 | | | 19 |
| S15611-06-05 | NPT3/8 " X18 | 8 | 05 | 23.5 | | | 19 |
| S15611-06-06 | NPT3/8 " X18 | 10 | 06 | 23.9 | | | 19 |
| S15611-06-08 | NPT3/8 " X18 | 13 | 08 | 24.4 | | | 19 |
| S15611-08-06 | NPT1/2 " X14 | 10 | 06 | 26.5 | | | 22 |
| S15611-08-08 | NPT1/2 " X14 | 13 | 08 | 26.5 | | | 22 |
| S15611-08-10 | NPT1/2 " X14 | 16 | 10 | 28 | | | 22 |
| S15611-12-08 | NPT3/4 " X14 | 13 | 08 | 29 | | | 27 |
| S15611-12-10 | NPT3/4 " X14 | 16 | 10 | 29.5 | | | 27 |
| S15611-12-12 | NPT3/4 " X14 | 19 | 12 | 30 | | | 27 |
| S15611-12-16 | NPT3/4 " X14 | 25 | 16 | 31 | | | 32 |
| S15611-16-10 | NPT1 " X11.5 | 16 | 10 | 33.5 | | | 36 |
| S15611-16-12 | NPT1 " X11.5 | 19 | 12 | 34 | | | 36 |
| S15611-16-16 | NPT1 " X11.5 | 25 | 16 | 35 | | | 36 |
| S15611-20-16 | NPT1.1/4 " X11.5 | 25 | 16 | 37.5 | | | 46 |
| S15611-20-20 | NPT1.1/4 " X11.5 | 32 | 20 | 38.5 | | | 46 |
| S15611-24-24 | NPT1.1/2 " X11.5 | 38 | 24 | 40.5 | | | 50 |
| S15611-32-32 | NPT2 " X11.5 | 51 | 32 | 43.5 | | | 65 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S15612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S15612-XX-XX.


S15611SW

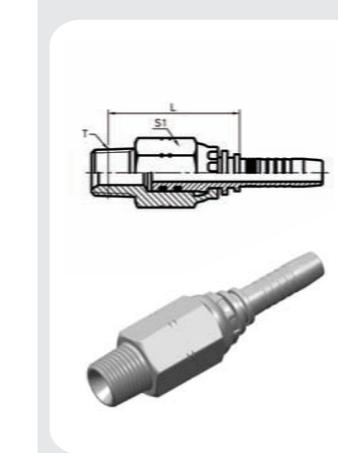

布锥管旋转外螺纹
NPT SWIVEL MALE

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|-----------------|--------------|---------|---------------|--|--|----|
| | | 公称内径DN | 标号 DASH | L | | | S1 |
| S15611SW-04-04 | NPT1/4 " X18 | 6 | 04 | 47.3 | | | 19 |
| S15611SW-06-06 | NPT3/8 " X18 | 10 | 06 | 54 | | | 22 |
| S15611SW-08-08 | NPT1/2 " X14 | 13 | 08 | 64 | | | 27 |
| S15611SW-12-12 | NPT3/4 " X14 | 19 | 12 | 68.5 | | | 32 |

S15691KSW

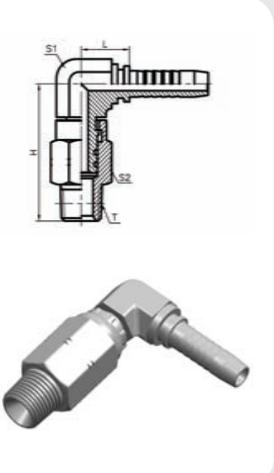90° 弯布锥管旋转外螺纹
90° NPT SWIVEL MALE

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|-----------------|-----------------|--------------|---------|---------------|------|----|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 | S2 |
| S15691KSW-04-04 | NPT1/4" X18 | 6 | 04 | 25 | 59.5 | 16 | 19 |
| S15691KSW-06-06 | NPT3/8" X18 | 10 | 06 | 25 | 64.5 | 16 | 22 |
| S15691KSW-08-08 | NPT1/2" X14 | 13 | 08 | 28.5 | 71.5 | 19 | 27 |
| S15691KSW-12-12 | NPT3/4" X14 | 19 | 12 | 36 | 76.9 | 27 | 32 |

D

扣压式

S24211

美制ORFS内螺纹平面
ORFS FEMALE FLAT SEAT
ISO 12151-1—SAE J516


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | L | S1 | |
| S24211-04-04 | 9/16" X18 | 6 | 04 | 22.5 | | 19 |
| S24211-06-04T | 11/16" X16 | 6 | 04 | 22.5 | | 22 |
| S24211-06-05T | 11/16" X16 | 8 | 05 | 23.5 | | 22 |
| S24211-06-06 | 11/16" X16 | 10 | 06 | 25.5 | | 22 |
| S24211-08-06T | 13/16" X16 | 10 | 06 | 25 | | 27 |
| S24211-08-08 | 13/16" X16 | 13 | 08 | 28.5 | | 27 |
| S24211-08-10 | 13/16" X16 | 16 | 10 | 29.5 | | 27 |
| S24211-10-08T | 1" X14 | 13 | 08 | 29 | | 30 |
| S24211-10-10 | 1" X14 | 16 | 10 | 33.5 | | 30 |
| S24211-12-08T | 1.3/16" X12 | 13 | 08 | 31 | | 36 |
| S24211-12-10T | 1.3/16" X12 | 16 | 10 | 32 | | 36 |
| S24211-12-12 | 1.3/16" X12 | 19 | 12 | 35 | | 36 |
| S24211-16-12T | 1.7/16" X12 | 19 | 12 | 34 | | 41 |
| S24211-16-16T | 1.7/16" X12 | 25 | 16 | 38 | | 41 |
| S24211-20-16T | 1.11/16" X12 | 25 | 16 | 35 | | 50 |
| S24211-20-20 | 1.11/16" X12 | 32 | 20 | 40 | | 50 |
| S24211-24-20T | 2" X12 | 32 | 20 | 36.5 | | 60 |
| S24211-24-24T | 2" X12 | 38 | 24 | 36.5 | | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S24212-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S24212-XX-XX.

D

扣压式


S14211

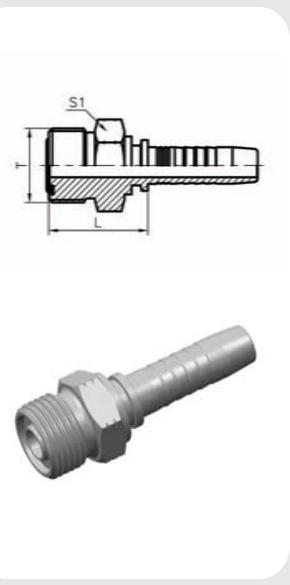美制ORFS外螺纹平面O形圈密封
ORFS MALE O-RING SEAL ISO 8434-3—SAE J1453

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|-----------------|--------------|---------|---------------|--|----|--|
| | | 公称内径DN | 标号 DASH | L | | S1 | |
| S14211-04-04 | 9/16" X18 | 6 | 04 | 22.5 | | 17 | |
| S14211-06-04 | 11/16" X16 | 6 | 04 | 24 | | 19 | |
| S14211-06-06 | 11/16" X16 | 10 | 06 | 24 | | 19 | |
| S14211-08-06 | 13/16" X16 | 10 | 06 | 27.5 | | 22 | |
| S14211-08-08 | 13/16" X16 | 13 | 08 | 28.5 | | 22 | |
| S14211-08-10 | 13/16" X16 | 16 | 10 | 28.5 | | 22 | |
| S14211-10-08 | 1" X14 | 13 | 08 | 32.5 | | 27 | |
| S14211-10-10 | 1" X14 | 16 | 10 | 33.5 | | 27 | |
| S14211-12-08 | 1.3/16" X12 | 13 | 08 | 35.5 | | 32 | |
| S14211-12-10 | 1.3/16" X12 | 16 | 10 | 36 | | 32 | |
| S14211-12-12 | 1.3/16" X12 | 19 | 12 | 36.5 | | 32 | |
| S14211-16-12 | 1.7/16" X12 | 19 | 12 | 37 | | 41 | |
| S14211-16-16 | 1.7/16" X12 | 25 | 16 | 38.5 | | 41 | |
| S14211-20-20 | 1.11/16" X12 | 32 | 20 | 41.5 | | 46 | |
| S14211-24-24 | 2" X12 | 38 | 24 | 43 | | 55 | |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S14212-XX-XX。
NOTE: 1、For use with braided hoses。2、If use spiral hoses, hose fitting series number is S14212-XX-XX。

S24211D

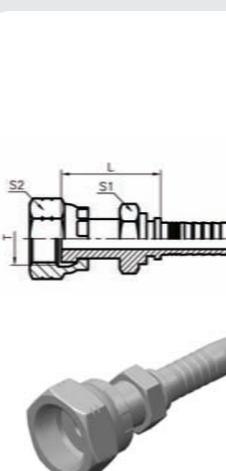美制 ORFS 内螺纹平面双六角
ORFS FEMALE FLAT SEAT DOUBLE HEXAGON
ISO 12151-1—SAE J516


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | L | S1 | S2 |
| S24211D-04-04 | 9/16" X18 | 6 | 04 | 27.5 | 14 | 19 |
| S24211D-06-04 | 11/16" X16 | 6 | 04 | 30.5 | 19 | 22 |
| S24211D-06-05 | 11/16" X16 | 8 | 05 | 30.5 | 19 | 22 |
| S24211D-06-06 | 11/16" X16 | 10 | 06 | 30.5 | 19 | 22 |
| S24211D-08-06 | 13/16" X16 | 10 | 06 | 33 | 22 | 27 |
| S24211D-08-08 | 13/16" X16 | 13 | 08 | 33.5 | 22 | 27 |
| S24211D-08-10 | 13/16" X16 | 16 | 10 | 34.5 | 24 | 27 |
| S24211D-10-08 | 1" X14 | 13 | 08 | 40 | 27 | 30 |
| S24211D-10-10 | 1" X14 | 16 | 10 | 41 | 27 | 30 |
| S24211D-12-08 | 1.3/16" X12 | 13 | 08 | 31 | 36 | 36 |
| S24211D-12-10 | 1.3/16" X12 | 16 | 10 | 32 | 36 | 36 |
| S24211D-12-12 | 1.3/16" X12 | 19 | 12 | 35 | 36 | 36 |
| S24211D-16-16 | 1.7/16" X12 | 25 | 16 | 35 | 41 | 41 |
| S24211D-20-16 | 1.11/16" X12 | 25 | 16 | 35 | 50 | 50 |
| S24211D-20-20 | 1.11/16" X12 | 32 | 20 | 40 | 50 | 50 |
| S24211D-24-20 | 2" X12 | 32 | 20 | 36.5 | 60 | 60 |
| S24211D-24-24 | 2" X12 | 38 | 24 | 36.5 | 60 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S24212D-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S24212D-XX-XX.

S24241



S24241-T




45° ORFS FEMALE FLAT SEAT ISO 12151-1—SAE J516

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S24241-04-04 | 9/16" X18 | 6 | 04 | 43 | 20 | 19 |
| S24241-06-04T | 11/16" X16 | 6 | 04 | 38 | 14.7 | 22 |
| S24241-06-05T | 11/16" X16 | 8 | 05 | 42 | 18.5 | 22 |
| S24241-06-06 | 11/16" X16 | 10 | 06 | 52 | 27 | 22 |
| S24241-08-06T | 13/16" X16 | 10 | 06 | 48 | 21.4 | 27 |
| S24241-08-08 | 13/16" X16 | 13 | 08 | 63.3 | 30.4 | 27 |
| S24241-08-10 | 13/16" X16 | 16 | 10 | 71 | 31.5 | 27 |
| S24241-10-08T | 1" X14 | 13 | 08 | 66.5 | 33.5 | 30 |
| S24241-10-10 | 1" X14 | 16 | 10 | 74.5 | 35 | 30 |
| S24241-12-08T | 1.3/16" X12 | 13 | 08 | 67.5 | 35 | 36 |
| S24241-12-10T | 1.3/16" X12 | 16 | 10 | 64.8 | 25.6 | 36 |
| S24241-12-12 | 1.3/16" X12 | 19 | 12 | 79.5 | 39.4 | 36 |
| S24241-16-12T | 1.7/16" X12 | 19 | 12 | 74 | 29 | 41 |
| S24241-16-16T | 1.7/16" X12 | 25 | 16 | 82 | 29.5 | 41 |
| S24241-20-16T | 1.11/16" X12 | 25 | 16 | 95 | 42 | 50 |
| S24241-20-20 | 1.11/16" X12 | 32 | 20 | 107 | 46.5 | 50 |
| S24241-24-20T | 2" X12 | 32 | 20 | 94.5 | 33.8 | 60 |
| S24241-24-24T | 2" X12 | 38 | 24 | 112 | 39.5 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S24242-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S24242-XX-XX.

S24291



S24291-T




90° ORFS FEMALE FLAT SEAT ISO 12151-1—SAE J516

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S24291-04-04 | 9/16" X18 | 6 | 04 | 30 | 36 | 19 |
| S24291-06-04T | 11/16" X16 | 6 | 04 | 30 | 42.5 | 22 |
| S24291-06-05T | 11/16" X16 | 8 | 05 | 33 | 35 | 22 |
| S24291-06-06 | 11/16" X16 | 10 | 06 | 36.5 | 48 | 22 |
| S24291-08-06T | 13/16" X16 | 10 | 06 | 36.5 | 38 | 27 |
| S24291-08-08 | 13/16" X16 | 13 | 08 | 43.5 | 56 | 27 |
| S24291-08-10 | 13/16" X16 | 16 | 10 | 55 | 60.5 | 27 |
| S24291-10-08T | 1" X14 | 13 | 08 | 43.5 | 46 | 30 |
| S24291-10-10 | 1" X14 | 16 | 10 | 55 | 65 | 30 |
| S24291-12-08T | 1.3/16" X12 | 13 | 08 | 43.5 | 46.5 | 36 |
| S24291-12-10T | 1.3/16" X12 | 16 | 10 | 55 | 51 | 36 |
| S24291-12-12 | 1.3/16" X12 | 19 | 12 | 64 | 75 | 36 |
| S24291-16-12T | 1.7/16" X12 | 19 | 12 | 64 | 58 | 41 |
| S24291-16-16T | 1.7/16" X12 | 25 | 16 | 73 | 66 | 41 |
| S24291-20-16T | 1.11/16" X12 | 25 | 16 | 74 | 67 | 50 |
| S24291-20-20 | 1.11/16" X12 | 32 | 20 | 91.5 | 96.5 | 50 |
| S24291-24-20T | 2" X12 | 32 | 20 | 91.5 | 79.5 | 60 |
| S24291-24-24T | 2" X12 | 38 | 24 | 109 | 93 | 60 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S24292-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S24292-XX-XX.

S16711

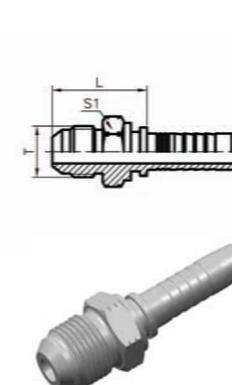


美制JIC外螺纹74° 外锥面
JIC MALE 74° CONE
ISO 8434-2-SAE J514


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|---|------|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S16711-04-04 | 7/16" X20 | 6 | 04 | | | 12 |
| S16711-05-04 | 1/2" X20 | 6 | 04 | | | 14 |
| S16711-05-05 | 1/2" X20 | 8 | 05 | | | 14 |
| S16711-05-06 | 1/2" X20 | 10 | 06 | | | 17 |
| S16711-06-04 | 9/16" X18 | 6 | 04 | | | 17 |
| S16711-06-05 | 9/16" X18 | 8 | 05 | | | 17 |
| S16711-06-06 | 9/16" X18 | 10 | 06 | | | 17 |
| S16711-08-06 | 3/4" X16 | 10 | 06 | | | 22 |
| S16711-08-08 | 3/4" X16 | 13 | 08 | | | 22 |
| S16711-10-06 | 7/8" X14 | 10 | 06 | | | 24 |
| S16711-10-08 | 7/8" X14 | 13 | 08 | | | 24 |
| S16711-10-10 | 7/8" X14 | 16 | 10 | | | 24 |
| S16711-12-08 | 1.1/16" X12 | 13 | 08 | | | 27 |
| S16711-12-10 | 1.1/16" X12 | 16 | 10 | | | 27 |
| S16711-12-12 | 1.1/16" X12 | 19 | 12 | | | 27 |
| S16711-12-16 | 1.1/16" X12 | 25 | 16 | | | 32 |
| S16711-14-10 | 1.3/16" X12 | 16 | 10 | | | 32 |
| S16711-14-12 | 1.3/16" X12 | 19 | 12 | | | 32 |
| S16711-16-12 | 1.5/16" X12 | 19 | 12 | | | 36 |
| S16711-16-16 | 1.5/16" X12 | 25 | 16 | | | 36 |
| S16711-20-16 | 1.5/8" X12 | 25 | 16 | | | 46 |
| S16711-20-20 | 1.5/8" X12 | 32 | 20 | | | 47.5 |
| S16711-24-20 | 1.7/8" X12 | 32 | 20 | | | 53.5 |
| S16711-24-24 | 1.7/8" X12 | 38 | 24 | | | 53 |
| S16711-32-32 | 2.1/2" X12 | 51 | 32 | | | 64 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S16712-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S16712-XX-XX.


S26711



S26711-T




S26711D

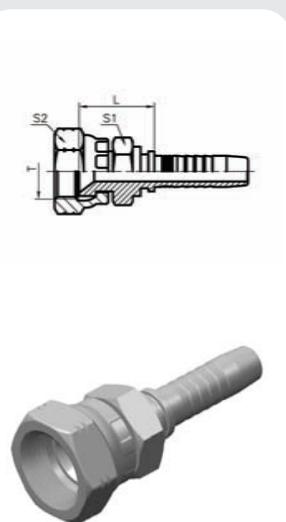美制JIC内螺纹74° 内锥面
JIC FEMALE 74° CONE SEAT J514

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | L | S1 | S2 |
| S26711-04-04 | 7/16" X20 | 6 | 04 | 15 | 14 | |
| S26711-05-04 | 1/2" X20 | 6 | 04 | 15.5 | 17 | |
| S26711-05-05 | 1/2" X20 | 8 | 05 | 15.5 | 17 | |
| S26711-06-04T | 9/16" X18 | 6 | 04 | 15.5 | 19 | |
| S26711-06-05 | 9/16" X18 | 8 | 05 | 15.5 | 19 | |
| S26711-06-06 | 9/16" X18 | 10 | 06 | 15.5 | 19 | |
| S26711-07-06 | 5/8" X18 | 10 | 06 | 16.5 | 22 | |
| S26711-08-06T | 3/4" X16 | 10 | 06 | 17.5 | 24 | |
| S26711-08-08 | 3/4" X16 | 13 | 08 | 18 | 24 | |
| S26711-08-10 | 3/4" X16 | 16 | 10 | 19 | 24 | |
| S26711-10-08T | 7/8" X14 | 13 | 08 | 18 | 27 | |
| S26711-10-10 | 7/8" X14 | 16 | 10 | 20 | 27 | |
| S26711-10-12 | 7/8" X14 | 19 | 12 | 20 | 27 | |
| S26711-12-08T | 1.1/16" X12 | 13 | 08 | 20 | 32 | |
| S26711-12-10T | 1.1/16" X12 | 16 | 10 | 21.5 | 32 | |
| S26711-12-12 | 1.1/16" X12 | 19 | 12 | 21.5 | 32 | |
| S26711-14-12T | 1.3/16" X12 | 19 | 12 | 21.5 | 36 | |
| S26711-16-12T | 1.5/16" X12 | 19 | 12 | 22 | 41 | |
| S26711-16-16 | 1.5/16" X12 | 25 | 16 | 23 | 41 | |
| S26711-20-16T | 1.5/8" X12 | 25 | 16 | 25 | 50 | |
| S26711-20-20 | 1.5/8" X12 | 32 | 20 | 26 | 50 | |
| S26711-24-20T | 1.7/8" X12 | 32 | 20 | 26.5 | 55 | |
| S26711-24-24 | 1.7/8" X12 | 38 | 24 | 26.5 | 55 | |
| S26711-32-24T | 2.1/2" X12 | 38 | 24 | 26.5 | 75 | |
| S26711-32-32 | 2.1/2" X12 | 51 | 32 | 27 | 75 | |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S26712-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S26712-XX-XX.


S26711D

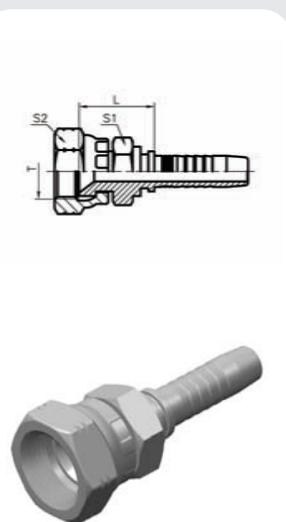美制JIC内螺纹74° 内锥面双六角
JIC FEMALE 74° CONE SEAT DOUBLE HEXAGON SAE J514

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | L | S1 | S2 |
| S26711D-04-04 | 7/16" X20 | 6 | 04 | 20 | 14 | 14 |
| S26711D-05-04 | 1/2" X20 | 6 | 04 | 20.5 | 17 | 17 |
| S26711D-06-04 | 9/16" X18 | 6 | 04 | 21 | 19 | 19 |
| S26711D-06-06 | 9/16" X18 | 10 | 06 | 21 | 19 | 19 |
| S26711D-08-06 | 3/4" X16 | 10 | 06 | 25 | 24 | 24 |
| S26711D-08-08 | 3/4" X16 | 13 | 08 | 24.5 | 24 | 24 |
| S26711D-08-10 | 3/4" X16 | 16 | 10 | 25.5 | 24 | 24 |
| S26711D-10-08 | 7/8" X14 | 13 | 08 | 28 | 27 | 27 |
| S26711D-10-10 | 7/8" X14 | 16 | 10 | 29 | 27 | 27 |
| S26711D-12-12 | 1.1/16" X12 | 19 | 12 | 31.5 | 32 | 32 |
| S26711D-16-12 | 1.5/16" X12 | 19 | 12 | 33.5 | 41 | 41 |
| S26711D-16-16 | 1.5/16" X12 | 25 | 16 | 34.5 | 41 | 41 |
| S26711D-16-20 | 1.5/16" X12 | 32 | 20 | 36.5 | 41 | 41 |
| S26711D-20-20 | 1.5/8" X12 | 32 | 20 | 39 | 50 | 50 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S26712-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S26712-XX-XX.


S26711D-SM

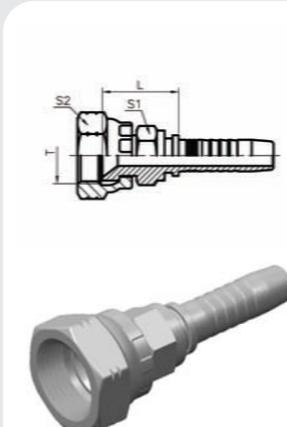美制JIC内螺纹74° 内锥面双六角
JIC FEMALE 74° CONE SEAT DOUBLE HEXAGON
SAE J514


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|-----------------|-----------------|--------------|---------|---------------|----|----|
| | | 公称内径DN | 标号 DASH | L | S1 | S2 |
| S26711D-04-04SM | 7/16" X20 | 6 | 04 | 20 | 12 | 14 |
| S26711D-05-04SM | 1/2" X20 | 6 | 04 | 20.5 | 12 | 17 |
| S26711D-06-04SM | 9/16" X18 | 6 | 04 | 21 | 14 | 19 |
| S26711D-06-06SM | 9/16" X18 | 10 | 06 | 21 | 17 | 19 |
| S26711D-08-06SM | 3/4" X16 | 10 | 06 | 25 | 19 | 24 |
| S26711D-08-08SM | 3/4" X16 | 13 | 08 | 24.5 | 22 | 24 |
| S26711D-08-10SM | 3/4" X16 | 16 | 10 | 25.5 | 22 | 24 |
| S26711D-10-08SM | 7/8" X14 | 13 | 08 | 24 | 22 | 27 |
| S26711D-10-10SM | 7/8" X14 | 16 | 10 | 27 | 22 | 27 |
| S26711D-12-12SM | 1.1/16" X12 | 19 | 12 | 31.5 | 27 | 32 |
| S26711D-16-12SM | 1.5/16" X12 | 19 | 12 | 31.5 | 32 | 41 |
| S26711D-16-16SM | 1.5/16" X12 | 25 | 16 | 32.5 | 32 | 41 |
| S26711D-20-20SM | 1.5/8" X12 | 32 | 20 | 37 | 41 | 50 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S26712D-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S26712D-XX-XX.




S26741




S26741-T

45° 弯美制JIC内螺纹74° 内锥面
45° JIC FEMALE 74° CONE SEAT
SAE J514

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S26741-04-04 | 7/16" X20 | 6 | 04 | 39 | 17.4 | 14 |
| S26741-05-04 | 1/2" X20 | 6 | 04 | 39 | 15.5 | 17 |
| S26741-05-05 | 1/2" X20 | 8 | 05 | 43 | 19.2 | 17 |
| S26741-06-04T | 9/16" X18 | 6 | 04 | 39.5 | 15.5 | 19 |
| S26741-06-05 | 9/16" X18 | 8 | 05 | 43.7 | 20 | 19 |
| S26741-06-06 | 9/16" X18 | 10 | 06 | 45.5 | 20 | 19 |
| S26741-07-06 | 5/8" X18 | 10 | 06 | 46 | 20 | 22 |
| S26741-08-06T | 3/4" X16 | 10 | 06 | 46.6 | 21 | 24 |
| S26741-08-08 | 3/4" X16 | 13 | 08 | 56 | 23.7 | 24 |
| S26741-08-10 | 3/4" X16 | 16 | 10 | 64.5 | 25 | 24 |
| S26741-10-08T | 7/8" X14 | 13 | 08 | 50 | 19 | 27 |
| S26741-10-10 | 7/8" X14 | 16</ | | | | |

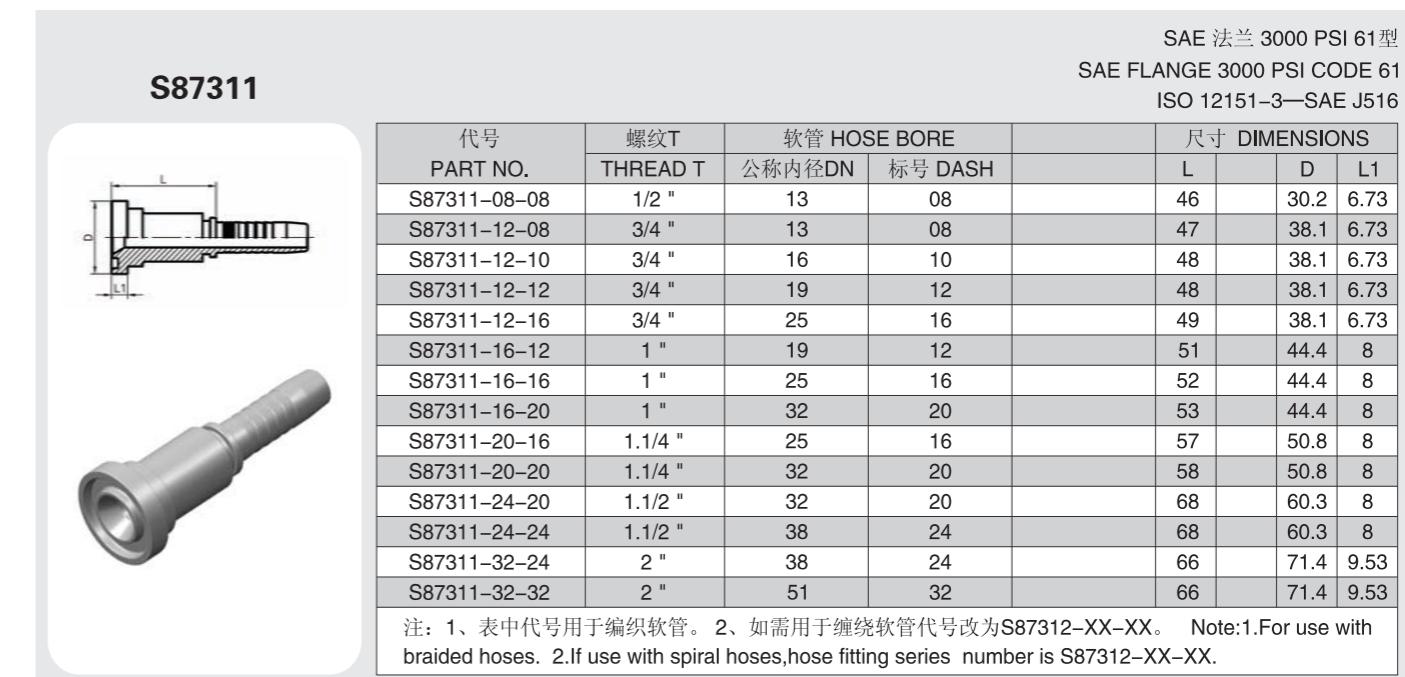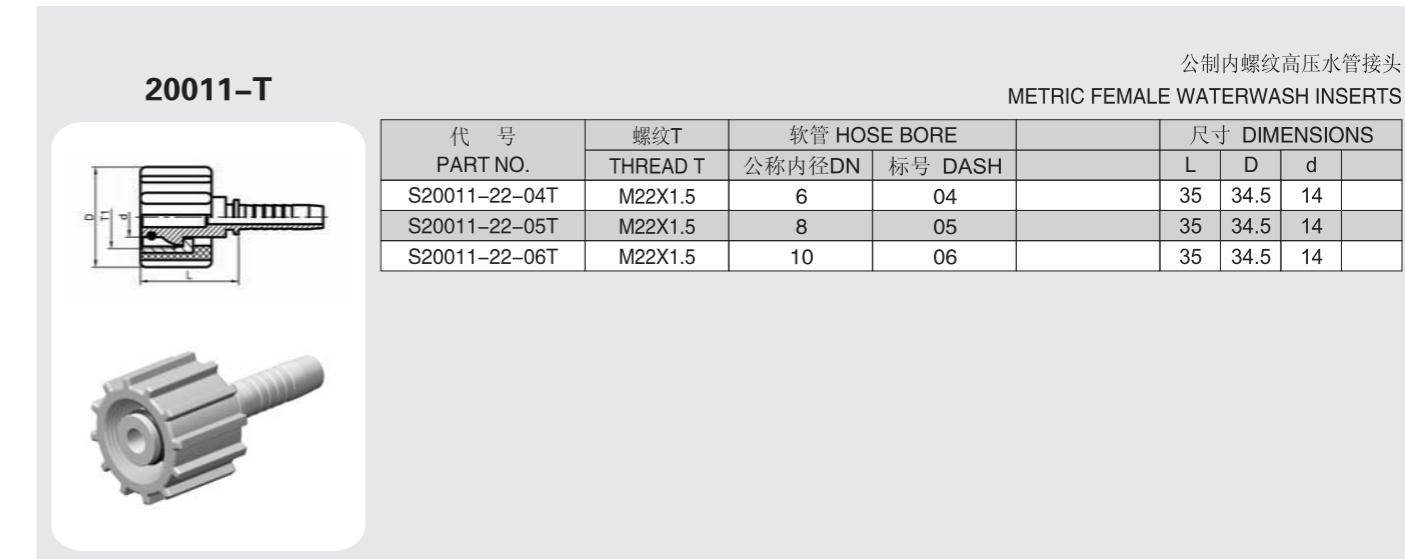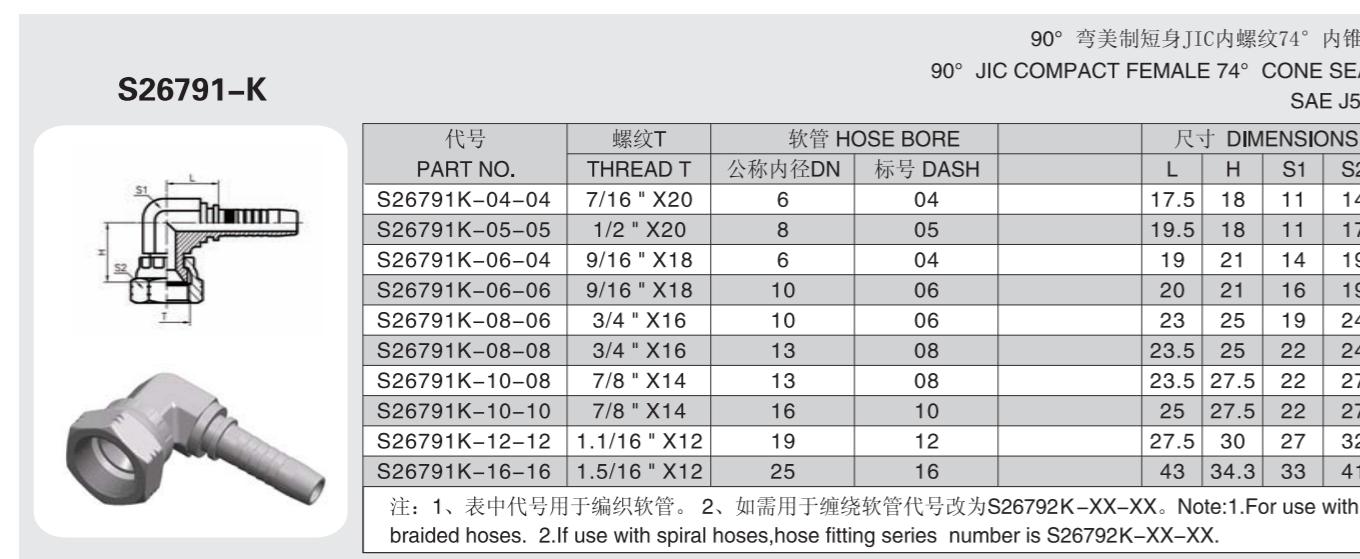

S87341

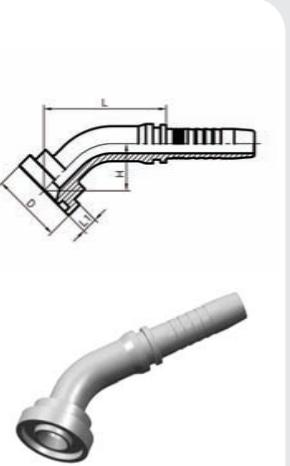


45° 弯 SAE 法兰 3000 PSI 61型
45° SAE FLANGE 3000 PSI CODE 61
ISO 12151-3-SAE J516

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|-----------------|--------------|---------|---------------|------|------|------|
| | | 公称内径DN | 标号 DASH | L | H | D | L1 |
| S87341-08-08 | 1/2 " | 13 | 08 | 55.5 | 23 | 30.2 | 6.73 |
| S87341-12-08 | 3/4 " | 13 | 08 | 59 | 24 | 38.1 | 6.73 |
| S87341-12-10 | 3/4 " | 16 | 10 | 64.5 | 25 | 38.1 | 6.73 |
| S87341-12-12 | 3/4 " | 19 | 12 | 71 | 28 | 38.1 | 6.73 |
| S87341-12-16 | 3/4 " | 25 | 16 | 82.5 | 29.5 | 38.1 | 6.73 |
| S87341-16-12 | 1 " | 19 | 12 | 71 | 28 | 44.4 | 8 |
| S87341-16-16 | 1 " | 25 | 16 | 82 | 29.4 | 44.4 | 8 |
| S87341-16-20 | 1 " | 32 | 20 | 94.5 | 33.8 | 44.4 | 8 |
| S87341-20-16 | 1.1/4 " | 25 | 16 | 77 | 31 | 50.8 | 8 |
| S87341-20-20 | 1.1/4 " | 32 | 20 | 94.5 | 33.8 | 50.8 | 8 |
| S87341-24-20 | 1.1/2 " | 32 | 20 | 94.5 | 33.8 | 60.3 | 8 |
| S87341-24-24 | 1.1/2 " | 38 | 24 | 110 | 40.4 | 60.3 | 8 |
| S87341-32-24 | 2 " | 38 | 24 | 110 | 40.4 | 71.4 | 9.53 |
| S87341-32-32 | 2 " | 51 | 32 | 127 | 46.3 | 71.4 | 9.53 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S87342-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S87342-XX-XX.

S87611

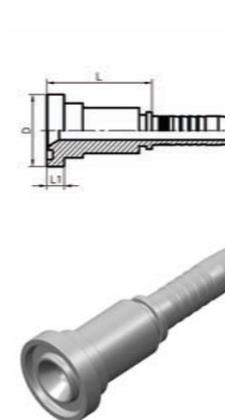


SAE 法兰 6000 PSI 62型
SAE FLANGE 6000 PSI CODE 62
ISO 12151-3-SAE J516

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|---|------|-------|
| | | 公称内径DN | 标号 DASH | L | H | D | L1 |
| S87611-08-08 | 1/2" | 13 | 08 | 47 | | 31.7 | 7.75 |
| S87611-12-10 | 3/4" | 16 | 10 | 51 | | 41.3 | 8.76 |
| S87611-12-12 | 3/4" | 19 | 12 | 51 | | 41.3 | 8.76 |
| S87611-16-12 | 1" | 19 | 12 | 56 | | 47.6 | 9.53 |
| S87611-16-16 | 1" | 25 | 16 | 57 | | 47.6 | 9.53 |
| S87611-16-20 | 1" | 32 | 20 | 58 | | 47.6 | 9.53 |
| S87611-20-16 | 1.1/4" | 25 | 16 | 65 | | 54 | 10.29 |
| S87611-20-20 | 1.1/4" | 32 | 20 | 66 | | 54 | 10.29 |
| S87611-24-20 | 1.1/2" | 32 | 20 | 75 | | 63.5 | 12.57 |
| S87611-24-24 | 1.1/2" | 38 | 24 | 75 | | 63.5 | 12.57 |
| S87611-32-24 | 2" | 38 | 24 | 85 | | 79.4 | 12.57 |
| S87611-32-32 | 2" | 51 | 32 | 85 | | 79.4 | 12.57 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S87612-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S87612-XX-XX.

S87391

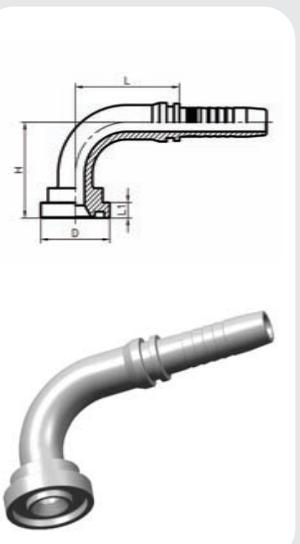


90° 弯 SAE 法兰 3000 PSI 61型
90° SAE FLANGE 3000 PSI CODE 61
ISO 12151-3-SAE J516

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|-----------------|--------------|---------|---------------|------|------|------|
| | | 公称内径DN | 标号 DASH | L | H | D | L1 |
| S87391-08-08 | 1/2 " | 13 | 08 | 44 | 47 | 30.2 | 6.73 |
| S87391-12-08 | 3/4 " | 13 | 08 | 44 | 48 | 38.1 | 6.73 |
| S87391-12-10 | 3/4 " | 16 | 10 | 55 | 53 | 38.1 | 6.73 |
| S87391-12-12 | 3/4 " | 19 | 12 | 64 | 59 | 38.1 | 6.73 |
| S87391-12-16 | 3/4 " | 25 | 16 | 74 | 66 | 38.1 | 6.73 |
| S87391-16-12 | 1 " | 19 | 12 | 64 | 59 | 44.4 | 8 |
| S87391-16-16 | 1 " | 25 | 16 | 74 | 66 | 44.4 | 8 |
| S87391-16-20 | 1 " | 32 | 20 | 91.5 | 78.5 | 44.4 | 8 |
| S87391-20-16 | 1.1/4 " | 25 | 16 | 74 | 66 | 50.8 | 8 |
| S87391-20-20 | 1.1/4 " | 32 | 20 | 91.5 | 78.5 | 50.8 | 8 |
| S87391-24-20 | 1.1/2 " | 32 | 20 | 91.5 | 80.5 | 60.3 | 8 |
| S87391-24-24 | 1.1/2 " | 38 | 24 | 109 | 94 | 60.3 | 8 |
| S87391-32-24 | 2 " | 38 | 24 | 109 | 94 | 71.4 | 9.53 |
| S87391-32-32 | 2 " | 51 | 32 | 131 | 115 | 71.4 | 9.53 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S87392-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S87392-XX-XX.

S87641

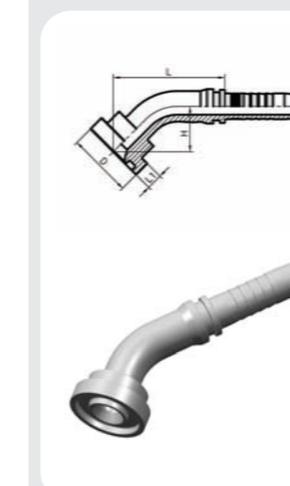


45° 弯 SAE 法兰 6000 PSI 62型
45° SAE FLANGE 6000 PSI CODE 62
ISO 12151-3-SAE J516

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|------|------|-------|
| | | 公称内径DN | 标号 DASH | L | H | D | L1 |
| S87641-08-08 | 1/2" | 13 | 08 | 58 | 25.1 | 31.7 | 7.75 |
| S87641-12-10 | 3/4" | 16 | 10 | 67 | 27.8 | 41.3 | 8.76 |
| S87641-12-12 | 3/4" | 19 | 12 | 73.5 | 30.5 | 41.3 | 8.76 |
| S87641-16-12 | 1" | 19 | 12 | 76 | 33 | 47.6 | 9.53 |
| S87641-16-16 | 1" | 25 | 16 | 87 | 34.4 | 47.6 | 9.53 |
| S87641-16-20 | 1" | 32 | 20 | 99.5 | 39 | 47.6 | 9.53 |
| S87641-20-16 | 1.1/4" | 25 | 16 | 90 | 37.4 | 54 | 10.29 |
| S87641-20-20 | 1.1/4" | 32 | 20 | 103 | 41.5 | 54 | 10.29 |
| S87641-24-20 | 1.1/2" | 32 | 20 | 106 | 45.1 | 63.5 | 12.57 |
| S87641-24-24 | 1.1/2" | 38 | 24 | 120 | 50.3 | 63.5 | 12.57 |
| S87641-32-24 | 2" | 38 | 24 | 125 | 56 | 79.4 | 12.57 |
| S87641-32-32 | 2" | 51 | 32 | 143 | 62 | 79.4 | 12.57 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S87642-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S87642-XX-XX.

S87691

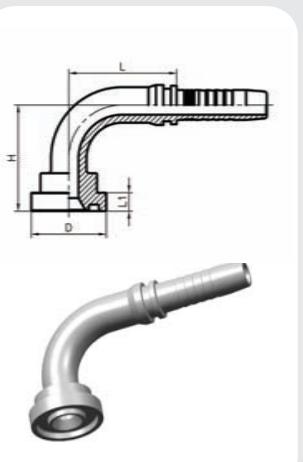


90° 弯 SAE 法兰 6000 PSI 62型
90° SAE FLANGE 6000 PSI CODE 62
ISO 12151-3-SAE J516

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|------|------|-------|
| | | 公称内径DN | 标号 DASH | L | H | D | L1 |
| S87691-08-08 | 1/2" | 13 | 08 | 43.5 | 48.5 | 31.7 | 7.75 |
| S87691-12-10 | 3/4" | 16 | 10 | 55 | 55 | 41.3 | 8.76 |
| S87691-12-12 | 3/4" | 19 | 12 | 64 | 63 | 41.3 | 8.76 |
| S87691-16-12 | 1" | 19 | 12 | 64 | 66 | 47.6 | 9.53 |
| S87691-16-16 | 1" | 25 | 16 | 74 | 73 | 47.6 | 9.53 |
| S87691-16-20 | 1" | 32 | 20 | 91.5 | 85.5 | 47.6 | 9.53 |
| S87691-20-16 | 1.1/4" | 25 | 16 | 74 | 77 | 54 | 10.29 |
| S87691-20-20 | 1.1/4" | 32 | 20 | 91.5 | 89.5 | 54 | 10.29 |
| S87691-24-20 | 1.1/2" | 32 | 20 | 91.5 | 94.5 | 63.5 | 12.57 |
| S87691-24-24 | 1.1/2" | 38 | 24 | 109 | 108 | 63.5 | 12.57 |
| S87691-32-24 | 2" | 38 | 24 | 109 | 112 | 79.4 | 12.57 |
| S87691-32-32 | 2" | 51 | 32 | 129 | 137 | 79.4 | 12.57 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S87692-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S87692-XX-XX.

S60011

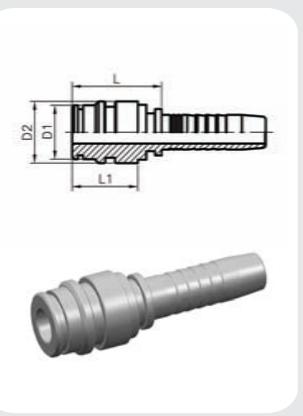


煤炭部标准矿用接头
MT STAPLELOCK MALE

| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | |
|----------------|--------------|---------|---------------|------|----|----|----|
| | 公称内径DN | 标号 DASH | L | L1 | D1 | D2 | |
| S60011-04-04 | 6 | 04 | | 31 | 25 | 11 | 15 |
| S60011-05-05 | 8 | 05 | | 33.5 | 26 | 13 | 18 |
| S60011-06-06 | 10 | 06 | | 34 | 26 | 15 | 18 |
| S60011-08-06 | 10 | 06 | | 34.5 | 26 | 18 | 22 |
| S60011-08-08 | 13 | 08 | | 34.5 | 26 | 18 | 22 |
| S60011-10-10 | 16 | 10 | | 39 | 30 | 20 | 25 |
| S60011-12-12 | 19 | 12 | | 40.5 | 31 | 24 | 28 |
| S60011-16-14 | 22 | 14 | | 41 | 31 | 30 | 35 |
| S60011-16-16 | 25 | 16 | | 42 | 31 | 30 | 35 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S60012-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S60012-XX-XX.

S70011

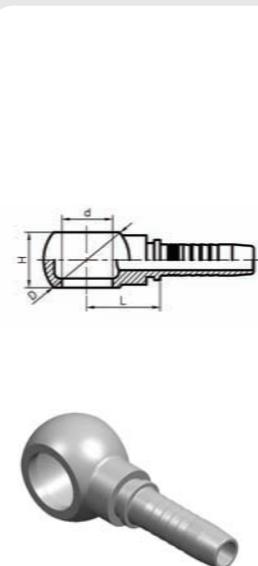


公制铰接体

METRIC BANJO DIN 7642

| 代号 PART NO. | 螺栓 BOLT | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | |
|----------------|------------|--------------|---------|---------------|------|------|----|----|
| | | 公称内径DN | 标号 DASH | L | d | D | H | |
| S70011-10-03 | M10X1 | 5 | 03 | | 17 | 10.1 | 17 | 10 |
| S70011-10-04 | M10X1 | 6 | 04 | | 19.5 | 10.1 | 17 | 10 |
| S70011-12-04 | M12X1.5 | 6 | 04 | | 21 | 12.1 | 20 | 12 |
| S70011-12-05 | M12X1.5 | 8 | 05 | | 22.5 | 12.1 | 22 | 12 |
| S70011-12-06 | M12X1.5 | 10 | 06 | | 21 | 12.1 | 20 | 12 |
| S70011-14-04 | M14X1.5 | 6 | 04 | | 24.5 | 14.1 | 24 | 14 |
| S70011-14-05 | M14X1.5 | 8 | 05 | | 21 | 14.1 | 24 | 14 |
| S70011-14-06 | M14X1.5 | 10 | 06 | | 24.5 | 14.1 | 24 | 14 |
| S70011-16-04 | M16X1.5 | 6 | 04 | | 24 | 16.1 | 28 | 18 |
| S70011-16-05 | M16X1.5 | 8 | 05 | | 24 | 16.1 | 28 | 18 |
| S70011-16-06 | M16X1.5 | 10 | 06 | | 24 | 16.1 | 28 | 18 |
| S70011-18-04 | M18X1.5 | 6 | 04 | | 30.5 | 18.1 | 32 | 20 |
| S70011-18-05 | M18X1.5 | 8 | 05 | | 24.5 | 18.1 | 32 | 20 |
| S70011-18-06 | M18X1.5 | 10 | 06 | | 24.5 | 18.1 | 32 | 20 |
| S70011-18-08 | M18X1.5 | 13 | 08 | | 25 | 18.1 | 32 | 20 |
| S70011-22-06 | M22X1.5 | 10 | 06 | | 27 | 22.1 | 35 | 22 |
| S70011-22-08 | M22X1.5 | 13 | 08 | | 27.5 | 22.1 | 35 | 22 |
| S70011-22-10 | M22X1.5 | 16 | 10 | | 28 | 22.1 | 39 | 22 |
| S70011-26-12 | M26X1.5 | 19 | 12 | | 36.5 | 26.1 | 45 | 29 |
| S70011-30-16 | M30X1.5 | 25 | 16 | | 40 | 30.1 | 54 | 36 |
| S70011-30-20 | M30X1.5 | 32 | 20 | | 41 | 30.1 | 54 | 36 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S70012-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S70012-XX-XX.

S72011

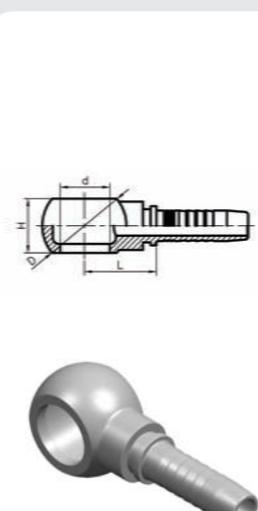


英制铰接体

BSP BANJO

| 代号 PART NO. | 螺栓 BOLT | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | |
|----------------|------------|--------------|---------|---------------|------|------|----|----|
| | | 公称内径DN | 标号 DASH | L | d | D | H | |
| S72011-04-04 | G1/4" X19 | 6 | 04 | | 19.5 | 13.3 | 24 | 14 |
| S72011-04-05 | G1/4" X19 | 8 | 05 | | 19.5 | 13.3 | 24 | 14 |
| S72011-04-06 | G1/4" X19 | 10 | 06 | | 22 | 13.3 | 24 | 14 |
| S72011-06-04 | G3/8" X19 | 6 | 04 | | 22 | 16.7 | 29 | 18 |
| S72011-06-05 | G3/8" X19 | 8 | 05 | | 22 | 16.7 | 29 | 20 |
| S72011-06-06 | G3/8" X19 | 10 | 06 | | 22 | 16.7 | 29 | 20 |
| S72011-06-08 | G3/8" X19 | 13 | 08 | | 23.5 | 16.7 | 28 | 20 |
| S72011-08-05 | G1/2" X14 | 8 | 05 | | 27.5 | 21 | 35 | 22 |
| S72011-08-06 | G1/2" X14 | 10 | 06 | | 27.5 | 21.2 | 35 | 22 |
| S72011-08-08 | G1/2" X14 | 13 | 08 | | 27.5 | 21.2 | 36 | 25 |
| S72011-08-10 | G1/2" X14 | 16 | 10 | | 28.5 | 21.2 | 36 | 25 |
| S72011-10-10 | G5/8" X14 | 16 | 10 | | 28 | 23 | 40 | 27 |
| S72011-12-10 | G3/4" X14 | 16 | 10 | | 32 | 26.5 | 48 | 31 |
| S72011-12-12 | G3/4" X14 | 19 | 12 | | 32 | 26.5 | 48 | 31 |
| S72011-16-08 | G1" X11 | 13 | 08 | | 40 | 33.3 | 48 | 36 |
| S72011-16-12 | G1" X11 | 19 | 12 | | 40 | 33.3 | 54 | 36 |
| S72011-16-16 | G1" X11 | 25 | 16 | | 41 | 33.3 | 54 | 36 |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S72012XX-XX。 Note:1.For use with braided hoses. 2.If use

S700M

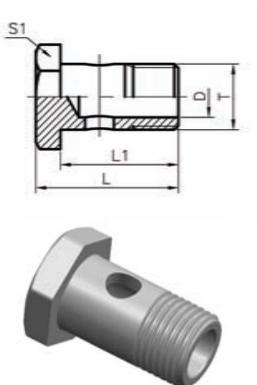


公制铰接螺栓
METRIC BOLT
DIN 7643

| 代号 PART NO. | 螺纹T THREAD T | 尺寸 DIMENSIONS | | |
|----------------|-----------------|---------------|------|----|
| | | L | L1 | S1 |
| S700M-10 | M10X1 | | 19.5 | 6 |
| S700M-12 | M12X1.5 | | 24.5 | 6 |
| S700M-14 | M14X1.5 | | 26 | 6 |
| S700M-16 | M16X1.5 | | 28.5 | 6 |
| S700M-18 | M18X1.5 | | 32.5 | 6 |
| S700M-22 | M22X1.5 | | 39 | 8 |
| S700M-26 | M26X1.5 | | 46 | 10 |
| S700M-30 | M30X1.5 | | 51 | 10 |

注：配S70011使用。Note: USE for S70011 series

S720B

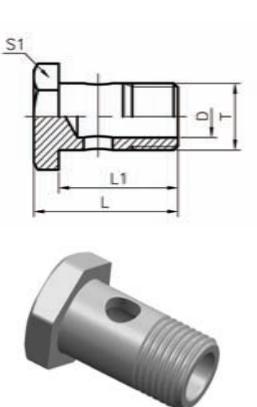


英制铰接螺栓
BSP BOLT

| 代号 PART NO. | 螺纹T THREAD T | 尺寸 DIMENSIONS | | |
|----------------|-----------------|---------------|------|-----|
| | | L | L1 | S1 |
| S720B-02 | G1/8" X28 | | 29.5 | 4.8 |
| S720B-04 | G1/4" X19 | | 28.5 | 6 |
| S720B-06 | G3/8" X19 | | 38.5 | 7 |
| S720B-08 | G1/2" X14 | | 44 | 8.5 |
| S720B-10 | G5/8" X14 | | 48.5 | 10 |
| S720B-12 | G3/4" X14 | | 46 | 10 |
| S720B-16 | G1" X11 | | 68.5 | 13 |

注：配S72011使用。Note: USE for S72011 series

S90011

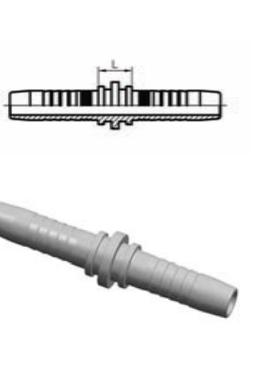


双面连接芯
DOUBLE CONNECTOR

| 代号 PART NO. | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|--------------|---------|---------------|----|--|
| | 公称内径DN | 标号 DASH | L | | |
| S90011-04 | 6 | 04 | | 12 | |
| S90011-05 | 8 | 05 | | 12 | |
| S90011-06 | 10 | 06 | | 12 | |
| S90011-08 | 13 | 08 | | 13 | |
| S90011-10 | 16 | 10 | | 16 | |
| S90011-12 | 19 | 12 | | 16 | |
| S90011-16 | 25 | 16 | | 23 | |
| S90011-20 | 32 | 20 | | 26 | |
| S90011-24 | 38 | 24 | | 26 | |
| S90011-32 | 51 | 32 | | 26 | |

注：1、表中代号用于编织软管。2、如需用于缠绕软管代号改为S90012-XX-XX。 Note:1.For use with braided hoses. 2.If use with spiral hoses,hose fitting series number is S90012-XX-XX.


S20513-T

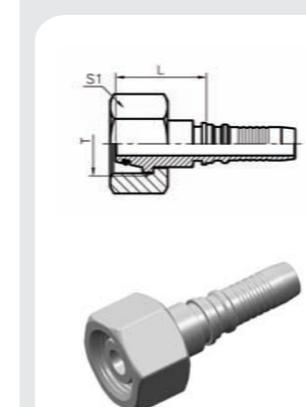

公制内螺纹24° 锥带O形圈重系列
METRIC FEMALE 24° CONE O-RING H.T.
ISO 12151-2-DIN 3865

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|---|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20513-36-12T | M36X2 | 19 | 12 | 25 | 33.5 | | 46 |
| S20513-42-16T | M42X2 | 25 | 16 | 30 | 37.5 | | 50 |
| S20513-52-20T | M52X2 | 32 | 20 | 38 | 45.5 | | 60 |


S20543-T

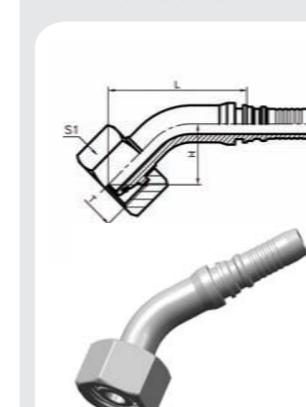

45° 弯公制内螺纹24° 锥带O形圈重系列
45° METRIC FEMALE 24° CONE O-RING H.T.
ISO 12151-2-DIN 3865

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20543-36-12T | M36X2 | 19 | 12 | 25 | 82.5 | 33 | 46 |
| S20543-42-16T | M42X2 | 25 | 16 | 30 | 95 | 35.1 | 50 |
| S20543-52-20T | M52X2 | 32 | 20 | 38 | 109 | 39.5 | 60 |


S20593-T

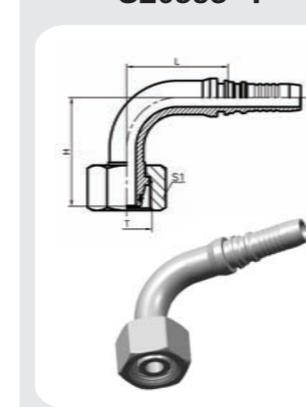

90° 公制内螺纹24° 锥带O形圈重系列
90° METRIC FEMALE 24° CONE O-RING H.T.
ISO 12151-2-DIN 3865


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|------------------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | | L | H | S1 |
| S20593-36-12T | M36X2 | 19 | 12 | 25 | 69 | 67.8 | 46 |
| S20593-42-16T | M42X2 | 25 | 16 | 30 | 76 | 74 | 50 |
| S20593-52-20T | M52X2 | 32 | 20 | 38 | 99.5 | 89.5 | 60 |

S22613-OR

英管内螺纹 60° 外锥面带O形圈
BSP FEMALE 60° CONE O-RING


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S22613-12-12OR | G3/4"X14 | 19 | 12 | 26.5 | | 32 |
| S22613-16-16OR | G1"X11 | 25 | 16 | 30.4 | | 41 |
| S22613-20-20OR | G1.1/4"X11 | 32 | 20 | 35.8 | | 50 |
| S22613-24-24OR | G1.1/2"X11 | 38 | 24 | 36.7 | | 55 |

S26713

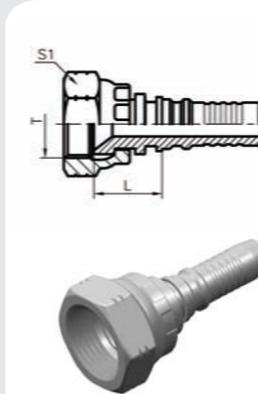美制JIC内螺纹74° 内锥面
JIC FEMALE 74° CONE SEAT SAE J514


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|--|----|
| | | 公称内径DN | 标号 DASH | L | | S1 |
| S26713-12-12 | 1.1/16 " X12 | 19 | 12 | 26.5 | | 32 |
| S26713-16-16 | 1.5/16 " X12 | 25 | 16 | 29.4 | | 41 |
| S26713-20-20 | 1.5/8 " X12 | 32 | 20 | 32.3 | | 50 |
| S26713-24-24 | 1.7/8 " X12 | 38 | 24 | 35.2 | | 60 |
| S26713-32-32 | 2.1/2 " X12 | 50 | 32 | 34.5 | | 75 |

S22643-OR

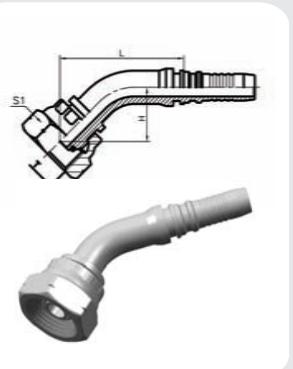45° 弯英管内螺纹 60° 外锥面带O形圈
45° BSP FEMALE 60° CONE O-RING


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S22643-12-12OR | G3/4"X14 | 19 | 12 | 83 | 32 | 32 |
| S22643-16-16OR | G1"X11 | 25 | 16 | 93 | 34.2 | 41 |
| S22643-20-20OR | G1.1/4"X11 | 32 | 20 | 109.5 | 40 | 50 |
| S22643-24-24OR | G1.1/2"X11 | 38 | 24 | 125 | 47 | 55 |

S26743

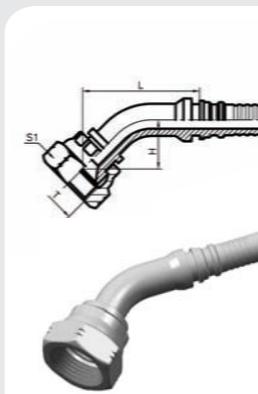45° 弯美制JIC内螺纹74° 内锥面
45° ELBOWJIC FEMALE 74° CONE SEAT SAE J514


| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S26743-12-12 | 1.1/16 " X12 | 19 | 12 | 80 | 30.2 | 32 |
| S26743-16-16 | 1.5/16 " X12 | 25 | 16 | 90 | 32.2 | 41 |
| S26743-20-20 | 1.5/8 " X12 | 32 | 20 | 109 | 38.4 | 50 |
| S26743-24-24 | 1.7/8 " X12 | 38 | 24 | 113 | 43.9 | 55 |
| S26743-32-32 | 2.1/2 " X12 | 51 | 32 | 115 | 51.5 | 75 |

S22693-OR

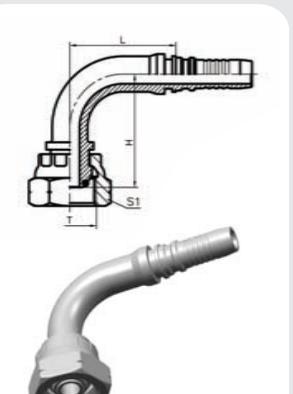
90°弯英管内螺纹 60° 外锥面带O形圈
90° BSP FEMALE 60° CONE O-RING

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|-----|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S22693-12-12OR | G3/4"X14 | 19 | 12 | 70 | 65 | 32 |
| S22693-16-16OR | G1"X11 | 25 | 16 | 82 | 74 | 41 |
| S22693-20-20OR | G1.1/4"X11 | 32 | 20 | 100 | 90 | 50 |
| S22693-24-24OR | G1.1/2"X11 | 38 | 24 | 118 | 105 | 55 |

S26793

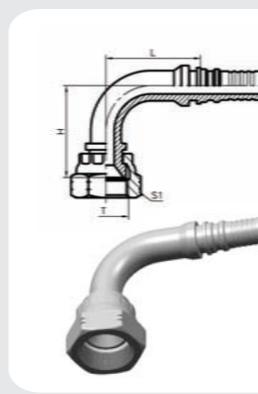
90°弯美制JIC内螺纹74° 内锥面
90° JIC FEMALE 74° CONE SEAT SAE J514

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|-------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S26793-12-12 | 1.1/16 " X12 | 19 | 12 | 73.8 | 64.5 | 32 |
| S26793-16-16 | 1.5/16 " X12 | 25 | 16 | 88.9 | 72.5 | 41 |
| S26793-20-20 | 1.5/8 " X12 | 32 | 20 | 105.8 | 81.5 | 50 |
| S26793-24-24 | 1.7/8 " X12 | 38 | 24 | 124.2 | 101 | 55 |
| S26793-32-32 | 2.1/2 " X12 | 50 | 32 | 150.3 | 121.3 | 75 |

S14213


美制ORFS外螺纹平面O形圈密封
ORFS MALE O-RING SEAL ISO 8434-3—SAE J1453

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|---|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S14213-12-12 | 1.3/16" X12 | 19 | 12 | 38.5 | | 32 |
| S14213-16-16 | 1.7/16" X12 | 25 | 16 | 40.5 | | 38 |
| S14213-20-20 | 1.11/16" X12 | 32 | 20 | 42.5 | | 46 |
| S14213-24-24 | 2" X12 | 38 | 24 | 45.5 | | 55 |

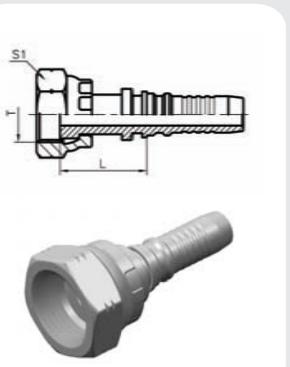D**S24213**


美制ORFS内螺纹平面
ORFS FEMALE FLAT SEAT ISO 12151-1—SAE J516

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|---|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S24213-12-12 | 1.3/16" X12 | 19 | 12 | 41 | | 36 |
| S24213-16-16 | 1.7/16" X12 | 25 | 16 | 44.4 | | 41 |
| S24213-20-20 | 1.11/16" X12 | 32 | 20 | 47.8 | | 50 |
| S24213-24-24 | 2" X12 | 38 | 24 | 48.2 | | 60 |

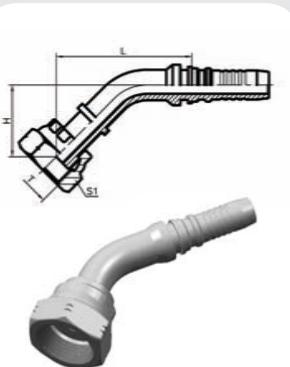内锁式**S24243**


45° 弯美制ORFS内螺纹平面
45° ELBOW ORFS FEMALE FLAT SEAT ISO 12151-1—SAE J516

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S24243-12-12 | 1.3/16" X12 | 19 | 12 | 97.7 | 42 | 36 |
| S24243-16-16 | 1.7/16" X12 | 25 | 16 | 111 | 44.6 | 41 |
| S24243-20-20 | 1.11/16" X12 | 32 | 20 | 124 | 49 | 50 |
| S24243-24-24 | 2" X12 | 38 | 24 | 138.2 | 53.6 | 60 |

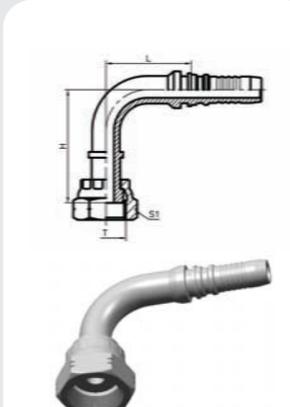S24293


90° 弯美制ORFS 内螺纹平面
90° ELBOW ORFS FEMALE FLAT SEAT ISO 12151-1—SAE J516

| 代号 PART NO. | 螺纹T THREAD T | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|-----------------|--------------|---------|---------------|-------|----|
| | | 公称内径DN | 标号 DASH | L | H | S1 |
| S24293-12-12 | 1.3/16" X12 | 19 | 12 | 73.8 | 88.5 | 36 |
| S24293-16-16 | 1.7/16" X12 | 25 | 16 | 88.9 | 88.5 | 41 |
| S24293-20-20 | 1.11/16" X12 | 32 | 20 | 105.8 | 100 | 50 |
| S24293-24-24 | 2" X12 | 38 | 24 | 123.2 | 114.5 | 60 |

D**S87313**

SAE 法兰 3000 PSI 61型
SAE FLANGE 3000 PSI CODE 61
ISO 12151-3—SAE J516


| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|---------------------|--------------|---------|---------------|------|------|
| | | 公称内径DN | 标号 DASH | L | D | L1 |
| S87313-12-12 | 3/4" | 19 | 12 | 50 | 38.1 | 6.73 |
| S87313-16-12 | 1" | 19 | 12 | 53 | 44.4 | 8 |
| S87313-16-16 | 1.1/4" | 25 | 16 | 54 | 44.4 | 8 |
| S87313-20-16 | 1.1/4" | 25 | 16 | 59 | 50.8 | 8 |
| S87313-20-20 | 1.1/4" | 32 | 20 | 60 | 50.8 | 8 |
| S87313-24-20 | 1.1/2" | 32 | 20 | 70 | 60.3 | 8 |
| S87313-24-24 | 1.1/2" | 38 | 24 | 70 | 60.3 | 8 |
| S87313-32-24 | 2" | 38 | 24 | 67.5 | 71.4 | 9.53 |
| S87313-32-32 | 2" | 51 | 32 | 64.5 | 71.4 | 9.53 |

内锁式**S87343**

45° 弯 SAE 法兰 3000 PSI 61型
45° SAE FLANGE 3000 PSI CODE 61
ISO 12151-3—SAE J516


| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | |
|----------------|---------------------|--------------|---------|---------------|------|------|
| | | 公称内径DN | 标号 DASH | L | H | D |
| S87343-12-12 | 3/4" | 19 | 12 | 78 | 28 | 38.1 |
| S87343-16-12 | 1" | 19 | 12 | 78 | 28 | 44.4 |
| S87343-16-16 | 1" | 25 | 16 | 88 | 29.4 | 44.4 |
| S87343-20-16 | 1.1/4" | 25 | 16 | 88 | 29.4 | 50.8 |
| S87343-20-20 | 1.1/4" | 32 | 20 | 103 | 33.8 | 50.8 |
| S87343-24-20 | 1.1/2" | 32 | 20 | 103 | 33.8 | 60.3 |
| S87343-24-24 | 1.1/2" | 38 | 24 | 118 | 40.4 | 60.3 |
| S87343-32-24 | 2" | 38 | 24 | 119 | 40.4 | 71.4 |
| S87343-32-32 | 2" | 51 | 32 | 137 | 46.3 | 71.4 |

92

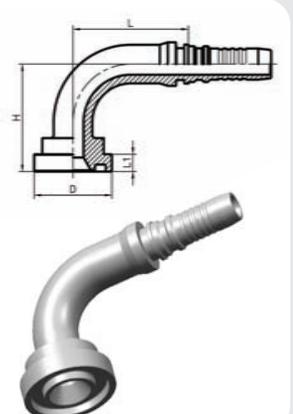S87393


90° 弯 SAE 法兰 3000 PSI 61型
90° SAE FLANGE 3000 PSI CODE 61
ISO 12151-3-SAE J516

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|------|------|------|
| | | 公称内径DN | 标号 DASH | L | D | H | L1 |
| S87393-12-12 | 3/4" | 19 | 12 | 69 | 59 | 38.1 | 6.73 |
| S87393-16-12 | 1" | 19 | 12 | 69 | 59 | 44.4 | 8 |
| S87393-16-16 | 1" | 25 | 16 | 80 | 66 | 44.4 | 8 |
| S87393-20-16 | 1.1/4" | 25 | 16 | 80 | 66 | 50.8 | 8 |
| S87393-20-20 | 1.1/4" | 32 | 20 | 99.5 | 78.5 | 50.8 | 8 |
| S87393-24-20 | 1.1/2" | 32 | 20 | 99.5 | 78.5 | 60.3 | 8 |
| S87393-24-24 | 1.1/2" | 38 | 24 | 117 | 94 | 60.3 | 8 |
| S87393-32-24 | 2" | 38 | 24 | 117 | 94 | 71.4 | 9.53 |
| S87393-32-32 | 2" | 51 | 32 | 137 | 115 | 71.4 | 9.53 |

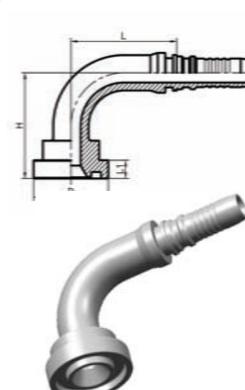S87693


90° 弯 SAE 法兰 6000 PSI 62型
90° SAE FLANGE 6000 PSI CODE 62
ISO 12151-3-SAE J516

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|------|------|-------|
| | | 公称内径DN | 标号 DASH | L | D | H | L1 |
| S87693-12-12 | 3/4" | 19 | 12 | 69 | 41.3 | 63 | 8.76 |
| S87693-16-12 | 1" | 19 | 12 | 69 | 47.6 | 66 | 9.53 |
| S87693-16-16 | 1" | 25 | 16 | 76 | 47.6 | 73 | 9.53 |
| S87693-20-16 | 1.1/4" | 25 | 16 | 76 | 54 | 77 | 10.29 |
| S87693-20-20 | 1.1/4" | 32 | 20 | 99.5 | 54 | 89.5 | 10.29 |
| S87693-24-20 | 1.1/2" | 32 | 20 | 99.5 | 63.5 | 94.5 | 12.57 |
| S87693-24-24 | 1.1/2" | 38 | 24 | 118 | 63.5 | 109 | 12.57 |
| S87693-32-24 | 2" | 38 | 24 | 118 | 79.4 | 109 | 12.57 |
| S87693-32-32 | 2" | 51 | 32 | 121 | 79.4 | 129 | 12.57 |

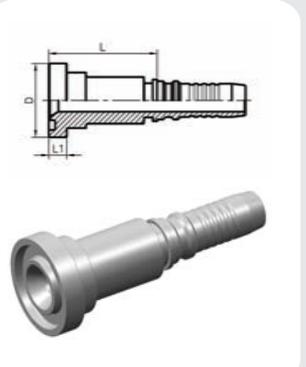S87613


SAE 法兰 6000 PSI 62型
SAE FLANGE 6000 PSI CODE 62
ISO 12151-3-SAE J516

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|------|---|-------|
| | | 公称内径DN | 标号 DASH | L | D | H | L1 |
| S87613-12-12 | 3/4" | 19 | 12 | 52.5 | 41.3 | | 8.76 |
| S87613-16-12 | 1" | 19 | 12 | 55.5 | 47.6 | | 9.53 |
| S87613-16-16 | 1" | 25 | 16 | 58.5 | 47.6 | | 9.53 |
| S87613-20-16 | 1.1/4" | 25 | 16 | 66 | 54 | | 10.29 |
| S87613-20-20 | 1.1/4" | 32 | 20 | 67.5 | 54 | | 10.29 |
| S87613-24-20 | 1.1/2" | 32 | 20 | 76 | 63.5 | | 12.57 |
| S87613-24-24 | 1.1/2" | 38 | 24 | 77 | 63.5 | | 12.57 |
| S87613-32-24 | 2" | 38 | 24 | 84 | 79.4 | | 12.57 |
| S87613-32-32 | 2" | 51 | 32 | 84 | 79.4 | | 12.57 |

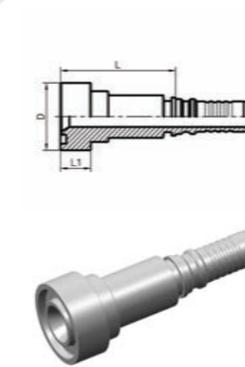S87913


SAE 法兰 9000 PSI
SAE FLANGE 9000 PSI

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|------|---|------|
| | | 公称内径DN | 标号 DASH | L | D | H | L1 |
| S87913-12-12 | 3/4" | 19 | 12 | 58 | 41.3 | | 14.3 |
| S87913-16-12 | 1" | 19 | 12 | 62.5 | 47.6 | | 14.3 |
| S87913-16-16 | 1" | 25 | 16 | 63.5 | 47.6 | | 14.3 |
| S87913-20-16 | 1.1/4" | 25 | 16 | 70.5 | 54 | | 14.3 |
| S87913-20-20 | 1.1/4" | 32 | 20 | 71.5 | 54 | | 14.3 |
| S87913-24-20 | 1.1/2" | 32 | 20 | 78.5 | 63.5 | | 14.3 |
| S87913-24-24 | 1.1/2" | 38 | 24 | 79 | 63.5 | | 14.3 |

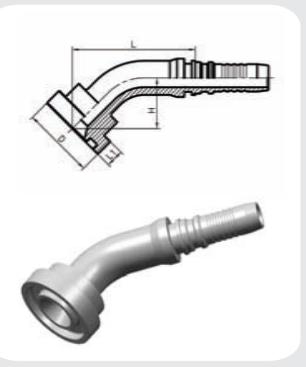S87643

45° 弯 SAE 法兰 6000 PSI 62型
45° SAE FLANGE 6000 PSI CODE 62
ISO 12151-3-SAE J516


| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|------|------|-------|
| | | 公称内径DN | 标号 DASH | L | D | H | L1 |
| S87643-12-12 | 3/4" | 19 | 12 | 80 | 41.3 | 31 | 8.76 |
| S87643-16-12 | 1" | 19 | 12 | 83 | 47.6 | 33 | 9.53 |
| S87643-16-16 | 1" | 25 | 16 | 84 | 47.6 | 34.4 | 9.53 |
| S87643-20-16 | 1.1/4" | 25 | 16 | 97 | 54 | 37.3 | 10.29 |
| S87643-20-20 | 1.1/4" | 32 | 20 | 110 | 54 | 41.5 | 10.29 |
| S87643-24-20 | 1.1/2" | 32 | 20 | 114 | 63.5 | 45.1 | 12.57 |
| S87643-24-24 | 1.1/2" | 38 | 24 | 128 | 63.5 | 50.3 | 12.57 |
| S87643-32-24 | 2" | 38 | 24 | 133 | 79.4 | 56 | 12.57 |
| S87643-32-32 | 2" | 51 | 32 | 153 | 79.4 | 61.9 | 12.57 |

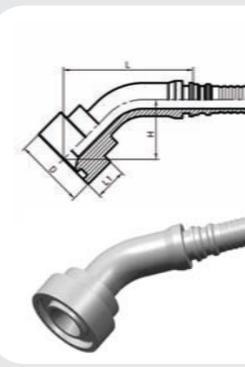S87943

45° 弯 SAE 法兰 9000 PSI
45° SAE FLANGE 9000 PSI

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | |
|----------------|---------------------|--------------|---------|---------------|------|------|------|
| | | 公称内径DN | 标号 DASH | L | D | H | L1 |
| S87943-12-12 | 3/4" | 19 | 12 | 80 | 41.3 | 35 | 14.3 |
| S87943-16-12 | 1" | 19 | 12 | 81.5 | 47.6 | 36.5 | |

S87993

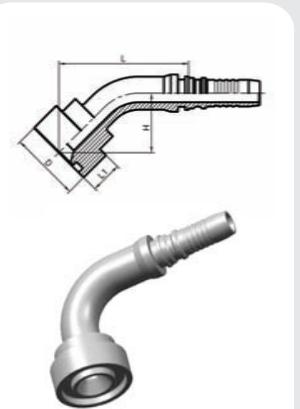


90° 弯 SAE 法兰 9000 PSI
90° SAE FLANGE 9000 PSI

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 软管 HOSE BORE | | 尺寸 DIMENSIONS | | | | |
|----------------|---------------------|--------------|---------|------------------|------|------|------|------|
| | | 公称内径DN | 标号 DASH | | L | D | H | L1 |
| S87993-12-12 | 3/4" | 19 | 12 | | 71 | 41.3 | 69 | 14.3 |
| S87993-16-12 | 1" | 19 | 12 | | 71 | 47.6 | 71 | 14.3 |
| S87993-16-16 | 1" | 25 | 16 | | 82 | 47.6 | 78 | 14.3 |
| S87993-20-16 | 1.1/4" | 25 | 16 | | 82 | 54 | 81 | 14.3 |
| S87993-20-20 | 1.1/4" | 32 | 20 | | 99.5 | 54 | 93.5 | 14.3 |
| S87993-24-20 | 1.1/2" | 32 | 20 | | 99.5 | 63.5 | 96.5 | 14.3 |
| S87993-24-24 | 1.1/2" | 38 | 24 | | 118 | 63.5 | 106 | 14.3 |

过渡接头

Adapter

**S1C、S1D
S1C/RN、S1D/RN**

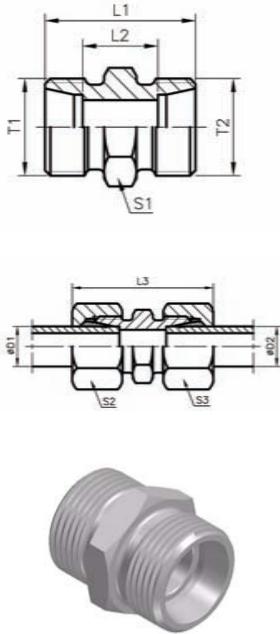


A类

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1/D2 | 尺寸 DIMENSIONS | | | | | 重量 克/件 (bar) | 工作压力 工作压力 (bar) | 系列 |
|----------------|-----------|---------|---------------|---------------|----|----|----|-------|--------------------|-----------------------|----|
| | T1 | T2 | | L1 | L2 | L3 | S1 | S2/S3 | | | |
| S1C-12 | M12X1.5 | M12X1.5 | 06 | 24 | 10 | 39 | 12 | 14 | 12 | 500 | |
| S1C-14 | M14X1.5 | M14X1.5 | 08 | 25 | 11 | 40 | 14 | 17 | 16 | 500 | |
| S1C-16 | M16X1.5 | M16X1.5 | 10 | 27 | 13 | 42 | 17 | 19 | 23 | 500 | |
| S1C-18 | M18X1.5 | M18X1.5 | 12 | 28 | 14 | 43 | 19 | 22 | 28 | 400 | |
| S1C-22 | M22X1.5 | M22X1.5 | 15 | 30 | 16 | 46 | 24 | 27 | 51 | 400 | |
| S1C-26 | M26X1.5 | M26X1.5 | 18 | 31 | 16 | 48 | 27 | 32 | 69 | 400 | |
| S1C-30 | M30X2 | M30X2 | 22 | 35 | 20 | 52 | 32 | 36 | 90 | 250 | |
| S1C-36 | M36X2 | M36X2 | 28 | 36 | 21 | 54 | 41 | 41 | 137 | 250 | |
| S1C-45 | M45X2 | M45X2 | 35 | 41 | 20 | 63 | 46 | 50 | 214 | 250 | |
| S1C-52 | M52X2 | M52X2 | 42 | 43 | 21 | 66 | 55 | 60 | 296 | 250 | |
| S1D-14 | M14X1.5 | M14X1.5 | 06 | 30 | 16 | 45 | 14 | 17 | 26 | 800 | |
| S1D-16 | M16X1.5 | M16X1.5 | 08 | 32 | 18 | 47 | 17 | 19 | 37 | 800 | |
| S1D-18 | M18X1.5 | M18X1.5 | 10 | 32 | 17 | 49 | 19 | 22 | 44 | 800 | |
| S1D-20 | M20X1.5 | M20X1.5 | 12 | 34 | 19 | 51 | 22 | 24 | 60 | 630 | |
| S1D-22 | M22X1.5 | M22X1.5 | 14 | 38 | 22 | 57 | 24 | 27 | 77 | 630 | |
| S1D-24 | M24X1.5 | M24X1.5 | 16 | 38 | 21 | 57 | 27 | 30 | 90 | 630 | |
| S1D-30 | M30X2 | M30X2 | 20 | 44 | 23 | 66 | 32 | 36 | 143 | 420 | |
| S1D-36 | M36X2 | M36X2 | 25 | 50 | 26 | 74 | 41 | 46 | 251 | 420 | |
| S1D-42 | M42X2 | M42X2 | 30 | 54 | 27 | 80 | 46 | 50 | 330 | 420 | |
| S1D-52 | M52X2 | M52X2 | 38 | 61 | 29 | 90 | 55 | 60 | 545 | 420 | |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1C-30/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example S1C-30/RN.

**S1C9、S1D9
S1C9/RN、S1D9/RN**

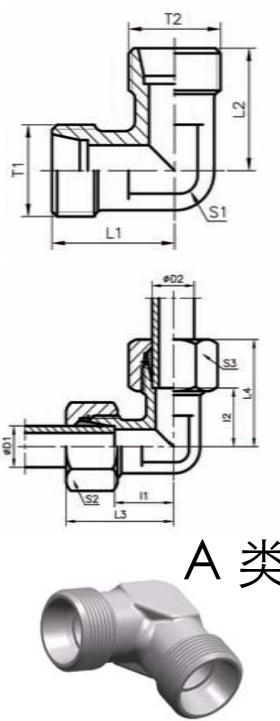


A类

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1/D2 | 尺寸 DIMENSIONS | | | | | 重量 克/件 (bar) | 工作压力 工作压力 (bar) | 系列 |
|----------------|-----------|---------|---------------|---------------|-------|-------|----|-------|--------------------|-----------------------|----|
| | T1 | T2 | | L1/L2 | L3/L4 | I1/I2 | S1 | S2/S3 | | | |
| S1C9-12 | M12X1.5 | M12X1.5 | 06 | 19 | 27 | 12 | 12 | 14 | 29 | 500 | |
| S1C9-14 | M14X1.5 | M14X1.5 | 08 | 21 | 29 | 14 | 12 | 17 | 43 | 500 | |
| S1C9-16 | M16X1.5 | M16X1.5 | 10 | 22 | 30 | 15 | 14 | 19 | 54 | 500 | |
| S1C9-18 | M18X1.5 | M18X1.5 | 12 | 24 | 32 | 17 | 17 | 22 | 80 | 400 | |
| S1C9-22 | M22X1.5 | M22X1.5 | 15 | 28 | 36 | 21 | 19 | 27 | 81 | 400 | |
| S1C9-26 | M26X1.5 | M26X1.5 | 18 | 31 | 40 | 23.5 | 24 | 32 | 140 | 400 | |
| S1C9-30 | M30X2 | M30X2 | 22 | 35 | 44 | 27.5 | 27 | 36 | 178 | 250 | |
| S1C9-36 | M36X2 | M36X2 | 28 | 38 | 47 | 30.5 | 36 | 41 | 340 | 250 | |
| S1C9-45 | M45X2 | M45X2 | 35 | 45 | 56 | 34.5 | 41 | 50 | 458 | 250 | |
| S1C9-52 | M52X2 | M52X2 | 42 | 51 | 63 | 40 | 50 | 60 | 776 | 250 | |
| S1D9-14 | M14X1.5 | M14X1.5 | 06 | 23 | 31 | 16 | 12 | 17 | 52 | 800 | |
| S1D9-16 | M16X1.5 | M16X1.5 | 08 | 24 | 32 | 17 | 14 | 19 | 74 | 800 | |
| S1D9-18 | M18X1.5 | M18X1.5 | 10 | 25 | 34 | 17.5 | 17 | 22 | 97 | 800 | |
| S1D9-20 | M20X1.5 | M20X1.5 | 12 | 29 | 38 | 21.5 | 17 | 24 | 137 | 630 | |
| S1D9-22 | M22X1.5 | M22X1.5 | 14 | 30 | 40 | 22 | 19 | 27 | 145 | 630 | |
| S1D9-24 | M24X1.5 | M24X1.5 | 16 | 33 | 43 | 24.5 | 24 | 30 | 162 | 630 | |
| S1D9-30 | M30X2 | M30X2 | 20 | 37 | 48 | 26.5 | 27 | 36 | 221 | 420 | |
| S1D9-36 | M36X2 | M36X2 | 25 | 42 | 54 | 30 | 36 | 46 | 424 | 420 | |
| S1D9-42 | M42X2 | M42X2 | 30 | 49 | 62 | 35.5 | 41 | 50 | 603 | 420 | |
| S1D9-52 | M52X2 | M52X2 | 38 | 57 | 72 | 41 | 50 | 60 | 1010 | 420 | |


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1C9-30/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example S1C9-30/RN.

**S1C-Y、S1D-Y
S1C-Y/RN、S1D-Y/RN**

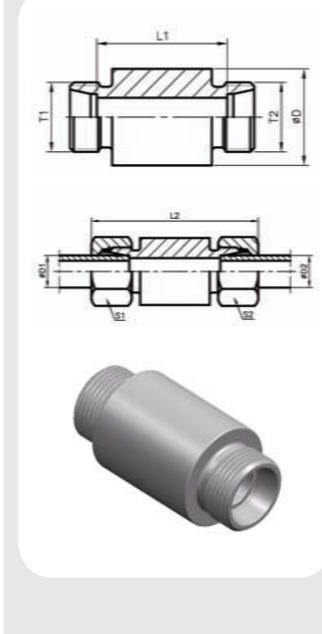


**SAC、SAD
SAC/RN、SAD/RN**

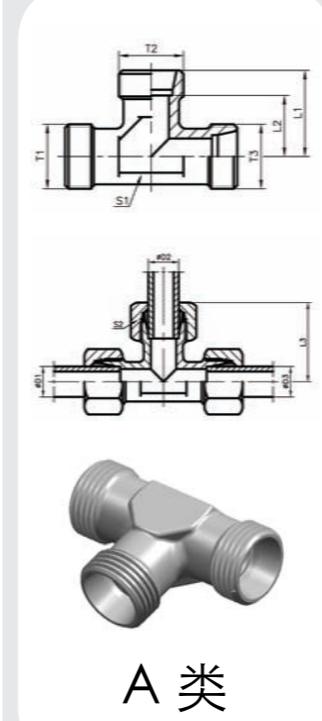

A类

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1/D2/D3 | 尺寸 DIMENSIONS | | | | | 重量 克/件 (bar) | 工作压力 工作压力 (bar) | 系列 |
|----------------|-----------|----------|------------------|---------------|----|----|----|----|--------------------|-----------------------|----|
| | T1/T2/T3 | D1/D2/D3 | | L1 | L2 | L3 | S1 | S2 | | | |
| SAC-12 | M12X1.5 | 06 | 19 | 12 | 27 | 12 | 14 | | 37 | 500 | |
| SAC-14 | M14X1.5 | 08 | 21 | 14 | 29 | 12 | 17 | | 53 | 500 | |
| SAC-16 | M16X1.5 | 10 | 22 | 15 | 30 | 14 | 19 | | 48 | 500 | |
| SAC-18 | M18X1.5 | 12 | 24 | 17 | 32 | 17 | 22 | | 65 | 400 | |
| SAC-22 | M22X1.5 | 15 | 28 | 21 | 36 | 19 | 27 | | 106 | 400 | |
| SAC-26 | M26X1.5 | 18 | 31 | 23.5 | 40 | 24 | 32 | | 179 | 400 | |
| SAC-30 | M30X2 | 22 | 35 | 27.5 | 44 | 27 | 36 | | 225 | 250 | |
| SAC-36 | M36X2 | 28 | 38 | 30.5 | 47 | 36 | 41 | | | | |

SXC、SXD
SXC/RN、SXD/RN

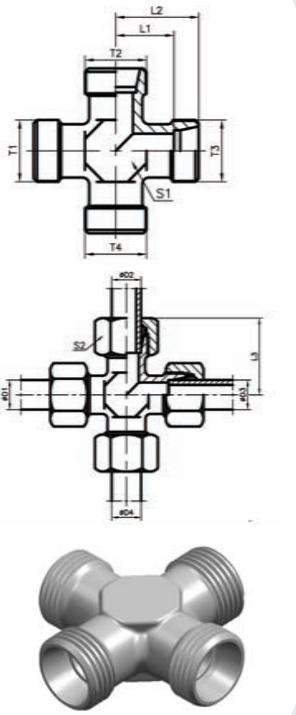


| 代号 PART NO. | 螺纹 THREAD | 管子外径 | | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|-------------|-------------|---------------|----|----|----|----|---|-----------|---------------|----|
| | | T1/T2/T3/T4 | D1/D2/D3/D4 | L1 | L2 | L3 | S1 | S2 | L | | | |
| SXC-12 | M12X1.5 | 06 | 19 | 12 | 27 | 12 | 14 | | | 35 | 315 | |
| SXC-14 | M14X1.5 | 08 | 21 | 14 | 29 | 12 | 17 | | | 40 | 315 | |
| SXC-16 | M16X1.5 | 10 | 22 | 15 | 30 | 14 | 19 | | | 52 | 315 | |
| SXC-18 | M18X1.5 | 12 | 24 | 17 | 32 | 17 | 22 | | | 69 | 315 | |
| SXC-22 | M22X1.5 | 15 | 28 | 21 | 36 | 19 | 27 | | | 130 | 315 | |
| SXC-26 | M26X1.5 | 18 | 31 | 23.5 | 40 | 24 | 32 | | | 188 | 315 | |
| SXC-30 | M30X2 | 22 | 35 | 27.5 | 44 | 27 | 36 | | | 251 | 160 | |
| SXC-36 | M36X2 | 28 | 38 | 30.5 | 47 | 36 | 41 | | | 392 | 160 | |
| SXC-45 | M45X2 | 35 | 45 | 34.5 | 56 | 41 | 50 | | | 618 | 160 | |
| SXC-52 | M52X2 | 42 | 51 | 40 | 63 | 50 | 60 | | | 905 | 160 | |
| SXD-14 | M14X1.5 | 06 | 23 | 16 | 31 | 12 | 17 | | | 58 | 630 | |
| SXD-16 | M16X1.5 | 08 | 24 | 17 | 32 | 14 | 19 | | | 82 | 630 | |
| SXD-18 | M18X1.5 | 10 | 25 | 17.5 | 34 | 17 | 22 | | | 97 | 630 | |
| SXD-20 | M20X1.5 | 12 | 29 | 21.5 | 38 | 17 | 24 | | | 146 | 630 | |
| SXD-22 | M22X1.5 | 14 | 30 | 22 | 40 | 19 | 27 | | | 176 | 400 | |
| SXD-24 | M24X1.5 | 16 | 33 | 24.5 | 43 | 24 | 30 | | | 220 | 400 | |
| SXD-30 | M30X2 | 20 | 37 | 26.5 | 48 | 27 | 36 | | | 339 | 315 | |
| SXD-36 | M36X2 | 25 | 42 | 30 | 54 | 36 | 46 | | | 576 | 315 | |
| SXD-42 | M42X2 | 30 | 49 | 35.5 | 62 | 41 | 50 | | | 843 | 315 | |
| SXD-52 | M52X2 | 38 | 57 | 41 | 72 | 50 | 60 | | | 1350 | 315 | |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如SXC-30/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example SXC-30/RN.

S6C-LN、S6D-LN
S6C-LN/RN、S6D-LN/RN

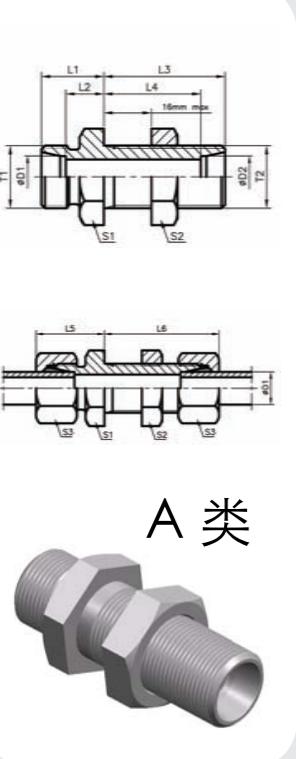


| 代号 PART NO. | 螺纹 THREAD | 管子外径 | | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 | | | |
|----------------|-----------|---------|----|---------------|----|------|----|------|----|-----------|---------------|----|----|------|-----|
| | | T1 | T2 | D1 | D2 | L1 | L2 | L3 | L4 | L5 | L6 | | | | |
| S6C-12LN | M12X1.5 | M12X1.5 | 06 | 06 | 14 | 7 | 34 | 27 | 22 | 42 | 17 | 17 | 14 | 39 | 500 |
| S6C-14LN | M14X1.5 | M14X1.5 | 08 | 08 | 15 | 8 | 34 | 27 | 23 | 42 | 19 | 19 | 17 | 50 | 500 |
| S6C-16LN | M16X1.5 | M16X1.5 | 10 | 10 | 17 | 10 | 35 | 28 | 25 | 43 | 22 | 22 | 19 | 67 | 500 |
| S6C-18LN | M18X1.5 | M18X1.5 | 12 | 12 | 17 | 10 | 36 | 29 | 25 | 44 | 24 | 24 | 22 | 78 | 400 |
| S6C-22LN | M22X1.5 | M22X1.5 | 15 | 15 | 19 | 12 | 38 | 31 | 27 | 46 | 27 | 30 | 27 | 128 | 400 |
| S6C-26LN | M26X1.5 | M26X1.5 | 18 | 18 | 21 | 13.5 | 40 | 32.5 | 30 | 49 | 32 | 36 | 32 | 198 | 400 |
| S6C-30LN | M30X2 | M30X2 | 22 | 22 | 24 | 16.5 | 42 | 34.5 | 33 | 51 | 36 | 41 | 36 | 254 | 250 |
| S6C-36LN | M36X2 | M36X2 | 28 | 28 | 26 | 18.5 | 43 | 35.5 | 35 | 52 | 41 | 46 | 41 | 335 | 250 |
| S6C-45LN | M45X2 | M45X2 | 35 | 35 | 29 | 18.5 | 47 | 36.5 | 40 | 58 | 50 | 55 | 50 | 546 | 250 |
| S6C-52LN | M52X2 | M52X2 | 42 | 42 | 30 | 19 | 47 | 36 | 42 | 59 | 60 | 65 | 60 | 758 | 250 |
| S6D-14LN | M14X1.5 | M14X1.5 | 06 | 06 | 19 | 12 | 36 | 29 | 27 | 44 | 19 | 19 | 17 | 65 | 900 |
| S6D-16LN | M16X1.5 | M16X1.5 | 08 | 08 | 20 | 13 | 36 | 29 | 28 | 44 | 22 | 22 | 19 | 87 | 900 |
| S6D-18LN | M18X1.5 | M18X1.5 | 10 | 10 | 22 | 14.5 | 37 | 29.5 | 31 | 46 | 24 | 24 | 22 | 112 | 900 |
| S6D-20LN | M20X1.5 | M20X1.5 | 12 | 12 | 22 | 14.5 | 38 | 30.5 | 31 | 47 | 27 | 27 | 24 | 141 | 900 |
| S6D-22LN | M22X1.5 | M22X1.5 | 14 | 14 | 25 | 17 | 40 | 32 | 35 | 50 | 30 | 30 | 27 | 180 | 700 |
| S6D-24LN | M24X1.5 | M24X1.5 | 16 | 16 | 25 | 16.5 | 40 | 31.5 | 35 | 50 | 32 | 32 | 30 | 201 | 630 |
| S6D-30LN | M30X2 | M30X2 | 20 | 20 | 28 | 17.5 | 44 | 33.5 | 39 | 55 | 41 | 41 | 36 | 462 | 630 |
| S6D-36LN | M36X2 | M36X2 | 25 | 25 | 32 | 20 | 47 | 35 | 44 | 59 | 46 | 46 | 46 | 492 | 630 |
| S6D-42LN | M42X2 | M42X2 | 30 | 30 | 35 | 21.5 | 51 | 37.5 | 48 | 64 | 50 | 50 | 50 | 631 | 420 |
| S6D-52LN | M52X2 | M52X2 | 38 | 38 | 38 | 22 | 53 | 37 | 53 | 68 | 65 | 65 | 60 | 1083 | 420 |

注：如需带卡套及卡套螺母订货，在代号后加“RN”，如S6C-30/RN；

Note: order the adapter with cutting ring and nut ,insert suffix " RN " after part NO , for example 6C-30/RN


S6C9-LN、S6D9-LN
S6C9-LN/RN S6D9-LN/RN

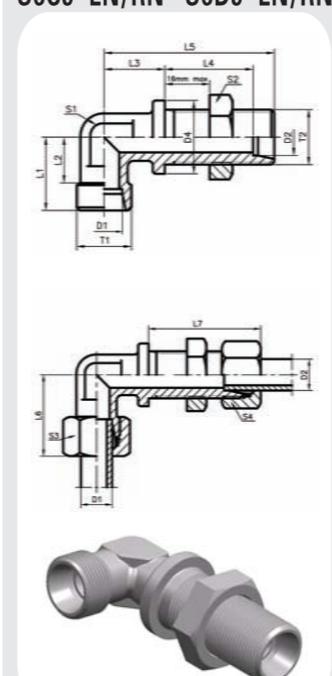

| 代号 PART NO. | 螺纹 THREAD | 管子外径 | | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 | | | | | |
|----------------|-----------|---------|----|---------------|----|----|----|----|----|-----------|---------------|----|----|----|----|----|-----|
| | | T1 | T2 | D1 | D2 | D4 | L1 | L2 | L3 | L4 | L5 | L6 | | | | | |
| S6C9-12LN | M12X1.5 | M12X1.5 | 06 | 06 | 17 | 19 | 12 | 14 | 27 | 48 | 27 | 42 | 12 | 17 | 14 | 51 | 315 |
| S6C9-14LN | M14X1.5 | M14X1.5 | 08 | 08 | 19 | 21 | 14 | 17 | 27 | 51 | 29 | 42 | 12 | 19 | 17 | 61 | 315 |
| S6C9-16LN | M16X1.5 | M16X1.5 | 10 | 10 | 22 | 22 | | | | | | | | | | | |

S2C4-W、S2D4-W

S2C4-W/RN、S2D4-W/RN

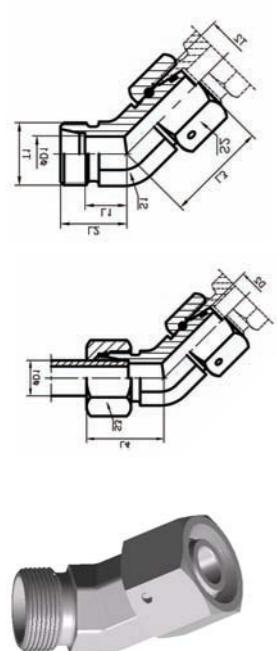


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 TUBE O.D | 尺寸 DIMENSIONS | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|---------|---------------|---------------|------|------|----|----|-----------|---------------|-----|
| | T1 | T2 | | D1 | D2 | L1 | L2 | L3 | S1 | S2/S3 | |
| S2C4-12W | M12X1.5 | M12X1.5 | 06 | 9 | 16 | 26 | 24 | 14 | 14 | 37 | 500 |
| S2C4-14W | M14X1.5 | M14X1.5 | 08 | 12 | 19 | 27.5 | 27 | 14 | 17 | 49 | 500 |
| S2C4-16W | M16X1.5 | M16X1.5 | 10 | 12 | 19 | 29 | 27 | 19 | 19 | 77 | 500 |
| S2C4-18W | M18X1.5 | M18X1.5 | 12 | 14 | 21 | 29.5 | 29 | 19 | 22 | 86 | 400 |
| S2C4-22W | M22X1.5 | M22X1.5 | 15 | 17 | 24 | 32.5 | 32 | 22 | 27 | 144 | 400 |
| S2C4-26W | M26X1.5 | M26X1.5 | 18 | 16.5 | 24 | 35.5 | 33 | 27 | 32 | 210 | 400 |
| S2C4-30W | M30X2 | M30X2 | 22 | 18.5 | 26 | 38.5 | 35 | 30 | 36 | 270 | 250 |
| S2C4-36W | M36X2 | M36X2 | 28 | 23 | 30.5 | 41.5 | 40 | 36 | 41 | 385 | 250 |
| S2C4-45W | M45X2 | M45X2 | 35 | 26.5 | 37 | 51 | 48 | 50 | 50 | 805 | 250 |
| S2C4-52W | M52X2 | M52X2 | 42 | 26 | 37 | 56 | 49 | 50 | 60 | 887 | 250 |
| S2D4-14W | M14X1.5 | M14X1.5 | 06 | 9 | 16 | 27 | 24 | 14 | 17 | 50 | 800 |
| S2D4-16W | M16X1.5 | M16X1.5 | 08 | 12 | 19 | 27.5 | 27 | 19 | 19 | 80 | 800 |
| S2D4-18W | M18X1.5 | M18X1.5 | 10 | 13.5 | 21 | 30 | 30 | 19 | 22 | 95 | 800 |
| S2D4-20W | M20X1.5 | M20X1.5 | 12 | 16.5 | 24 | 31 | 33 | 22 | 24 | 137 | 630 |
| S2D4-24W | M24X1.5 | M24X1.5 | 16 | 15.5 | 24 | 36.5 | 34 | 27 | 30 | 217 | 630 |
| S2D4-30W | M30X2 | M30X2 | 20 | 16 | 26.5 | 44.5 | 38 | 30 | 36 | 313 | 420 |
| S2D4-36W | M36X2 | M36X2 | 25 | 18.5 | 30.5 | 50 | 43 | 36 | 46 | 529 | 420 |
| S2D4-42W | M42X2 | M42X2 | 30 | 23.5 | 37 | 55 | 50 | 50 | 50 | 940 | 420 |
| S2D4-52W | M52X2 | M52X2 | 38 | 21 | 37 | 63 | 52 | 50 | 60 | 1055 | 420 |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S2C4-30W/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example S2C4-30W/RN.

S2C9-W、S2D9-W

S2C9-W/RN、S2D9-W/RN

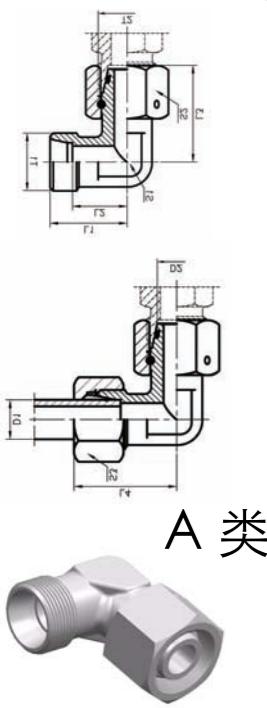

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | 尺寸 DIMENSIONS | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|---------|------|---------------|------|------|----|----|-----------|---------------|-----|
| | T1 | T2 | | D1/D2 | L1 | L2 | L3 | L4 | S1 | S2/S3 | |
| S2C9-12W | M12X1.5 | M12X1.5 | 06 | 19 | 12 | 26 | 27 | 12 | 14 | 34 | 500 |
| S2C9-14W | M14X1.5 | M14X1.5 | 08 | 21 | 14 | 27.5 | 29 | 12 | 17 | 43 | 500 |
| S2C9-16W | M16X1.5 | M16X1.5 | 10 | 22 | 15 | 29 | 30 | 14 | 19 | 58 | 500 |
| S2C9-18W | M18X1.5 | M18X1.5 | 12 | 24 | 17 | 29.5 | 32 | 17 | 22 | 81 | 400 |
| S2C9-22W | M22X1.5 | M22X1.5 | 15 | 28 | 21 | 32.5 | 36 | 19 | 27 | 128 | 400 |
| S2C9-26W | M26X1.5 | M26X1.5 | 18 | 31 | 23.5 | 35.5 | 40 | 24 | 32 | 197 | 400 |
| S2C9-30W | M30X2 | M30X2 | 22 | 35 | 27.5 | 38.5 | 44 | 27 | 36 | 258 | 250 |
| S2C9-36W | M36X2 | M36X2 | 28 | 38 | 30.5 | 41.5 | 47 | 36 | 41 | 370 | 250 |
| S2C9-45W | M45X2 | M45X2 | 35 | 45 | 34.5 | 51 | 56 | 41 | 50 | 593 | 250 |
| S2C9-52W | M52X2 | M52X2 | 42 | 51 | 40 | 56 | 63 | 50 | 60 | 993 | 250 |
| S2D9-14W | M14X1.5 | M14X1.5 | 06 | 23 | 16 | 27 | 31 | 12 | 17 | 48 | 800 |
| S2D9-16W | M16X1.5 | M16X1.5 | 08 | 24 | 17 | 27.5 | 32 | 14 | 19 | 65 | 800 |
| S2D9-18W | M18X1.5 | M18X1.5 | 10 | 25 | 17.5 | 30 | 34 | 17 | 22 | 92 | 800 |
| S2D9-20W | M20X1.5 | M20X1.5 | 12 | 29 | 21.5 | 31 | 38 | 17 | 24 | 107 | 630 |
| S2D9-22W | M22X1.5 | M22X1.5 | 14 | 30 | 22 | 35 | 40 | 19 | 27 | 146 | 630 |
| S2D9-24W | M24X1.5 | M24X1.5 | 16 | 33 | 24.5 | 36.5 | 43 | 24 | 30 | 212 | 630 |
| S2D9-30W | M30X2 | M30X2 | 20 | 37 | 26.5 | 44.5 | 48 | 27 | 36 | 309 | 420 |
| S2D9-36W | M36X2 | M36X2 | 25 | 42 | 30 | 50 | 54 | 36 | 46 | 547 | 420 |
| S2D9-42W | M42X2 | M42X2 | 30 | 49 | 35.5 | 55 | 62 | 41 | 50 | 744 | 420 |
| S2D9-52W | M52X2 | M52X2 | 38 | 57 | 41 | 63 | 72 | 50 | 60 | 1222 | 420 |


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S2C9-30W/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example S2C9-30W/RN.

**S3C-W
S3D-W**

内螺纹直通接头


STRAIGHT TUBE ADAPTERS WITH SWIVEL NUT

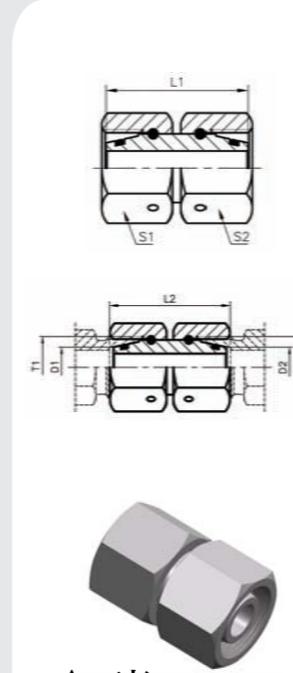

A类

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | 尺寸 DIMENSIONS | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|---------|------|---------------|----|----|-------|----|-----------|---------------|-----|
| | T1 | T2 | | D1/D2 | L1 | L2 | S1/S2 | L3 | L4 | | |
| S3C-12W | M12X1.5 | M12X1.5 | 06 | 32 | 33 | 14 | | | | 28 | 500 |
| S3C-14W | M14X1.5 | M14X1.5 | 08 | 32 | 33 | 17 | | | | 41 | 500 |
| S3C-16W | M16X1.5 | M16X1.5 | 10 | 33 | 34 | 19 | | | | 53 | 500 |
| S3C-18W | M18X1.5 | M18X1.5 | 12 | 33 | 34 | 22 | | | | 71 | 400 |
| S3C-22W | M22X1.5 | M22X1.5 | 15 | 38 | 39 | 27 | | | | 129 | 400 |
| S3C-26W | M26X1.5 | M26X1.5 | 18 | 38 | 40 | 32 | | | | 165 | 400 |
| S3C-30W | M30X2 | M30X2 | 22 | 42 | 44 | 36 | | | | 243 | 250 |
| S3C-36W | M36X2 | M36X2 | 28 | 46 | 48 | 41 | | | | 319 | 250 |
| S3C-45W | M45X2 | M45X2 | 35 | 48 | 52 | | | | | | |

**SCC-W、SCD-W
SCC-W/RN、SCD-W/RN**

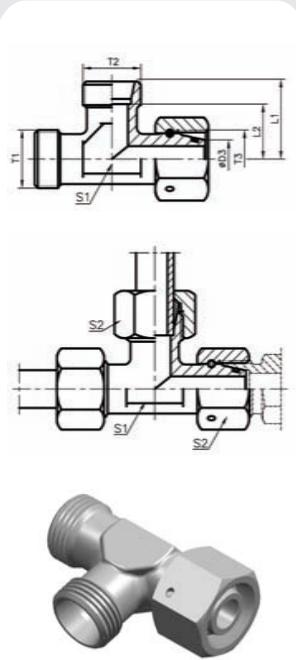

A类


内螺纹主支三通接头
RUN TEE FITTINGS WITH SWIVEL NUT

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | | 重量 克/件 | 工作压力 (bar) | 系列 | |
|----------------|-----------|---------|-------|----|---------------|------|------|----|----|-----------|---------------|-----|---|
| | T1/T2 | T3 | D1/D2 | D3 | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| SCC-12W | M12X1.5 | M12X1.5 | 06 | 06 | 19 | 12 | 26 | 27 | 12 | 14 | 42 | 500 | L |
| SCC-14W | M14X1.5 | M14X1.5 | 08 | 08 | 21 | 14 | 27.5 | 29 | 12 | 17 | 53 | 500 | |
| SCC-16W | M16X1.5 | M16X1.5 | 10 | 10 | 22 | 15 | 29 | 30 | 14 | 19 | 71 | 500 | |
| SCC-18W | M18X1.5 | M18X1.5 | 12 | 12 | 24 | 17 | 29.5 | 32 | 17 | 22 | 97 | 400 | |
| SCC-22W | M22X1.5 | M22X1.5 | 15 | 15 | 28 | 21 | 32.5 | 36 | 19 | 27 | 159 | 400 | |
| SCC-26W | M26X1.5 | M26X1.5 | 18 | 18 | 31 | 23.5 | 35.5 | 40 | 24 | 32 | 239 | 400 | |
| SCC-30W | M30X2 | M30X2 | 22 | 22 | 35 | 27.5 | 38.5 | 44 | 27 | 36 | 308 | 250 | |
| SCC-36W | M36X2 | M36X2 | 28 | 28 | 38 | 30.5 | 41.5 | 47 | 36 | 41 | 449 | 250 | |
| SCC-45W | M45X2 | M45X2 | 35 | 35 | 45 | 34.5 | 51 | 56 | 41 | 50 | 679 | 250 | |
| SCC-52W | M52X2 | M52X2 | 42 | 42 | 51 | 40 | 56 | 63 | 50 | 60 | 1131 | 250 | |
| SCD-14W | M14X1.5 | M14X1.5 | 06 | 06 | 23 | 16 | 27 | 31 | 12 | 17 | 63 | 800 | |
| SCD-16W | M16X1.5 | M16X1.5 | 08 | 08 | 24 | 17 | 27.5 | 32 | 14 | 19 | 79 | 800 | |
| SCD-18W | M18X1.5 | M18X1.5 | 10 | 10 | 25 | 17.5 | 30 | 34 | 17 | 22 | 113 | 800 | |
| SCD-20W | M20X1.5 | M20X1.5 | 12 | 12 | 29 | 21.5 | 31 | 38 | 17 | 24 | 136 | 630 | |
| SCD-22W | M22X1.5 | M22X1.5 | 14 | 14 | 30 | 22 | 35 | 40 | 19 | 27 | 173 | 630 | |
| SCD-24W | M24X1.5 | M24X1.5 | 16 | 16 | 33 | 24.5 | 36.5 | 43 | 24 | 30 | 239 | 630 | |
| SCD-30W | M30X2 | M30X2 | 20 | 20 | 37 | 26.5 | 44.5 | 48 | 27 | 36 | 388 | 420 | |
| SCD-36W | M36X2 | M36X2 | 25 | 25 | 42 | 30 | 50 | 54 | 36 | 46 | 652 | 420 | |
| SCD-42W | M42X2 | M42X2 | 30 | 30 | 49 | 35.5 | 55 | 62 | 41 | 50 | 905 | 420 | |
| SCD-52W | M52X2 | M52X2 | 38 | 38 | 57 | 41 | 60 | 72 | 50 | 60 | 1462 | 420 | |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如SCC-30W/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example SCC-30W/RN.

**S1CB、S1DB
S1CB/RN、S1DB/RN**

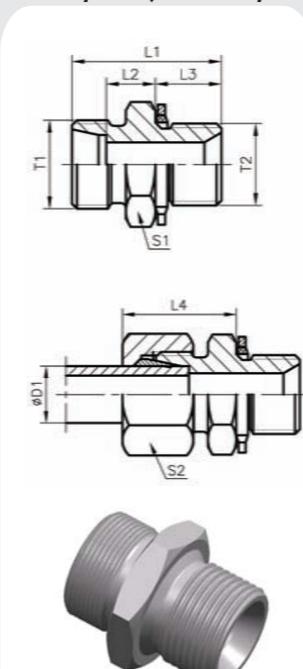


英管螺纹60° 锥密封或组合垫密封两用柱端
BSP THREAD 60° CONE SEALING

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|------------|------|------|---------------|----|----|----|----|-----------|---------------|----|
| | T1 | T2 | D1 | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CB-12-02 | M12X1.5 | G1/8"X28 | 06 | 25 | 10 | 8 | 23 | 14 | 14 | 12 | 500 | L |
| S1CB-12-04 | M12X1.5 | G1/4"X19 | 06 | 28 | 12 | 11 | 24 | 19 | 14 | 28 | 500 | |
| S1CB-14-02 | M14X1.5 | G1/8"X28 | 08 | 25 | 10 | 8 | 23 | 14 | 17 | 16 | 500 | |
| S1CB-14-04 | M14X1.5 | G1/4"X19 | 08 | 28 | 12 | 11 | 24 | 19 | 17 | 27 | 500 | |
| S1CB-14-06 | M14X1.5 | G3/8"X19 | 08 | 29.5 | 13.5 | 12 | 24 | 22 | 17 | 44 | 420 | |
| S1CB-16-04 | M16X1.5 | G1/4"X19 | 10 | 29 | 12 | 11 | 25 | 19 | 19 | 29 | 500 | |
| S1CB-16-06 | M16X1.5 | G3/8"X19 | 10 | 30.5 | 13.5 | 12 | 25 | 22 | 19 | 42 | 420 | |
| S1CB-16-08 | M16X1.5 | G1/2"X14 | 10 | 34 | 16 | 14 | 26 | 27 | 19 | 70 | 400 | |
| S1CB-18-04 | M18X1.5 | G1/4"X19 | 12 | 29 | 12 | 11 | 25 | 19 | 22 | 30 | 400 | |
| S1CB-18-06 | M18X1.5 | G3/8"X19 | 12 | 30.5 | 13.5 | 12 | 25 | 22 | 22 | 40 | 420 | |
| S1CB-18-08 | M18X1.5 | G1/2"X14 | 12 | 34 | 16 | 14 | 26 | 27 | 22 | 66 | 400 | |
| S1CB-18-12 | M18X1.5 | G3/4"X14 | 12 | 36.5 | 18.5 | 16 | 26 | 32 | 22 | 117 | 250 | |
| S1CB-22-06 | M22X1.5 | G3/8"X19 | 15 | 32 | 13.5 | 12 | 26 | 24 | 27 | 53 | 400 | |
| S1CB-22-08 | M22X1.5 | G1/2"X14 | 15 | 35.5 | 16 | 14 | 27 | 27 | 71 | 400 | | |
| S1CB-26-08 | M26X1.5 | G1/2"X14 | 18 | 35 | 16 | 14 | 28 | 27 | 32 | 70 | 400 | |
| S1CB-26-12 | M26X1.5 | G3/4"X14 | 18 | 37.5 | 18.5 | 16 | 28 | 32 | 32 | 118 | 250 | |
| S1CB-30-12 | M30X2 | G3/4"X14 | 22 | 39.5 | 18.5 | 16 | 30 | 32 | 36 | 101 | 250 | |
| S1CB-36-16 | M36X2 | G1"X11 | 28 | 42.5 | 20.5 | 19 | 31 | 41 | 41 | 168 | 250 | |
| S1CB-45-20 | M45X2 | G1.1/4"X11 | 35 | 46.5 | 20.5 | 20 | 37 | 50 | 50 | 270 | 250 | |
| S1CB-52-24 | M52X2 | G1.1/2"X11 | 42 | 50 | 23 | 22 | 39 | 55 | 60 | 340 | 250 | |
| S1DB-14-04 | M14X1.5 | G1/4"X19 | 06 | 32 | 12 | 11 | 28 | 19 | 17 | 35 | 800 | |
| S1DB-16-04 | M16X1.5 | G1/4"X19 | 08 | 32 | 12 | 11 | 28 | 19 | 19 | 40 | 800 | |
| S1DB-16-06 | M16X1.5 | G3/8"X19 | 08 | 35.5 | 13.5 | 12 | 32 | 22 | 19 | 56 | 800 | |
| S1DB-18-04 | M18X1.5 | G1/4"X19 | 10 | 32 | 12 | 11 | 29 | 19 | 22 | 41 | 400 | |
| S1DB-18-06 | M18X1.5 | G3/8"X19 | 10 | 35.5 | 13.5 | 12 | 31 | 22 | 22 | 54 | 800 | |
| S1DB-18-08 | M18X1.5 | G1/2"X14 | 10 | 38 | 16 | 14 | 31 | 27 | 22 | 95 | 630 | |
| S1DB-20-04 | M20X1.5 | G1/4"X19 | 12 | 34 | 12 | 11 | 31 | 22 | 24 | 60 | 630 | |
| S1DB-20-06 | M20X1.5 | G3/8"X19 | 12 | 35.5 | 13.5 | 12 | 31 | 22 | 24 | 62 | 630 | |
| S1DB-20-08 | M20X1.5 | G1/2"X14 | 12 | 38 | 16 | 14 | 31 | 27 | 24 | 98 | 630 | |
| S1DB-22-08 | M22X1.5 | G1/2"X14 | 14 | 40 | 16 | 14 | 34 | 27 | 27 | 95 | 630 | |
| S1DB-24-06 | M24X1.5 | G3/8"X19 | 16 | 37.5 | 13.5 | 12 | 34 | 27 | 30 | 82 | 630 | |
| S1DB-24-08 | M24X1.5 | G1/2"X14 | 16 | 40 | 16 | 14 | 34 | 27 | 30 | 90 | 630 | |

S1CB-WD

S1CB-WD/RN

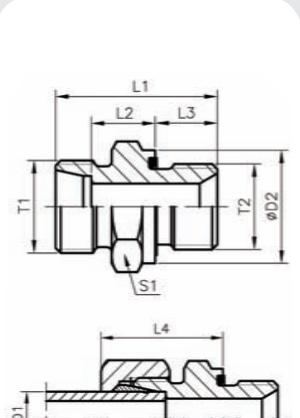

A类

英管螺纹胶垫密封柱端或60° 锥密封
BSP THREAD WITH CAPTIVE SEAL OR 60° SEAT SEALING


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | | 重量 克/件 | 工作压力 (bar) | 系列 | |
|----------------|-----------|--------------|------|----|---------------|------|----|----|----|-----------|---------------|-----|--|
| | T1 | T2 | D1 | D2 | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CB-12-02WD | M12X1.5 | G1/8 " X28 | 06 | 14 | 23.5 | 8.5 | 8 | 23 | 14 | 14 | 13 | 500 | |
| S1CB-12-04WD | M12X1.5 | G1/4 " X19 | 06 | 19 | 29 | 10 | 12 | 25 | 19 | 14 | 28 | 500 | |
| S1CB-12-06WD | M12X1.5 | G3/8 " X19 | 06 | 22 | 30.5 | 11.5 | 12 | 26 | 22 | 14 | 44 | 420 | |
| S1CB-12-08WD | M12X1.5 | G1/2 " X14 | 06 | 27 | 33 | 12 | 14 | 27 | 27 | 14 | 61 | 400 | |
| S1CB-14-02WD | M14X1.5 | G1/8 " X28 | 08 | 14 | 24.5 | 9.5 | 8 | 24 | 14 | 17 | 16 | 500 | |
| S1CB-14-04WD | M14X1.5 | G1/4 " X19 | 08 | 19 | 29 | 10 | 12 | 25 | 19 | 17 | 27 | 500 | |
| S1CB-14-06WD | M14X1.5 | G3/8 " X19 | 08 | 22 | 30.5 | 11.5 | 12 | 26 | 22 | 17 | 45 | 420 | |
| S1CB-14-08WD | M14X1.5 | G1/2 " X14 | 08 | 27 | 33 | 12 | 14 | 27 | 27 | 17 | 74 | 400 | |
| S1CB-16-02WD | M16X1.5 | G1/8 " X28 | 10 | 14 | 25.5 | 10.5 | 8 | 25 | 17 | 19 | 21 | 500 | |
| S1CB-16-04WD | M16X1.5 | G1/4 " X19 | 10 | 19 | 30 | 11 | 12 | 26 | 19 | 19 | 29 | 500 | |
| S1CB-16-06WD | M16X1.5 | G3/8 " X19 | 10 | 22 | 31.5 | 12.5 | 12 | 27 | 22 | 19 | 43 | 420 | |
| S1CB-16-08WD | M16X1.5 | G1/2 " X14 | 10 | 27 | 34 | 13 | 14 | 28 | 27 | 19 | 71 | 400 | |
| S1CB-18-02WD | M18X1.5 | G1/8 " X28 | 12 | 14 | 26.5 | 11.5 | 8 | 26 | 19 | 22 | 26 | 420 | |
| S1CB-18-04WD | M18X1.5 | G1/4 " X19 | 12 | 19 | 31 | 12 | 12 | 27 | 19 | 22 | 31 | 400 | |
| S1CB-18-06WD | M18X1.5 | G3/8 " X19 | 12 | 22 | 31.5 | 12.5 | 12 | 27 | 22 | 22 | 41 | 420 | |
| S1CB-18-08WD | M18X1.5 | G1/2 " X14 | 12 | 27 | 34 | 13 | 14 | 28 | 27 | 22 | 67 | 400 | |
| S1CB-18-12WD | M18X1.5 | G3/4 " X14 | 12 | 32 | 37 | 14 | 16 | 29 | 32 | 22 | 118 | 250 | |
| S1CB-22-06WD | M22X1.5 | G3/8 " X19 | 15 | 22 | 32.5 | 13.5 | 12 | 29 | 24 | 27 | 54 | 400 | |
| S1CB-22-08WD | M22X1.5 | G1/2 " X14 | 15 | 27 | 35 | 14 | 14 | 29 | 27 | 27 | 72 | 400 | |
| S1CB-22-12WD | M22X1.5 | G3/4 " X14 | 15 | 32 | 38 | 15 | 16 | 30 | 32 | 27 | 116 | 250 | |
| S1CB-26-06WD | M26X1.5 | G3/8 " X19 | 18 | 22 | 33.5 | 14 | 12 | 30 | 27 | 32 | 66 | 400 | |
| S1CB-26-08WD | M26X1.5 | G1/2 " X14 | 18 | 27 | 36 | 14.5 | 14 | 31 | 27 | 32 | 71 | 400 | |
| S1CB-26-12WD | M26X1.5 | G3/4 " X14 | 18 | 32 | 38 | 14.5 | 16 | 31 | 32 | 32 | 110 | 250 | |
| S1CB-30-08WD | M30X2 | G1/2 " X14 | 22 | 27 | 38 | 16.5 | 14 | 33 | 32 | 36 | 91 | 250 | |
| S1CB-30-12WD | M30X2 | G3/4 " X14 | 22 | 32 | 40 | 16.5 | 16 | 33 | 32 | 36 | 102 | 250 | |
| S1CB-30-16WD | M30X2 | G1 " X11 | 22 | 40 | 43 | 17.5 | 18 | 34 | 41 | 36 | 189 | 250 | |
| S1CB-36-12WD | M36X2 | G3/4 " X14 | 28 | 32 | 41 | 17.5 | 16 | 34 | 41 | 41 | 159 | 250 | |
| S1CB-36-16WD | M36X2 | G1 " X11 | 28 | 40 | 43 | 17.5 | 18 | 34 | 41 | 41 | 170 | 250 | |
| S1CB-36-20WD | M36X2 | G1.1/4 " X11 | 28 | 50 | 46 | 18.5 | 20 | 35 | 50 | 41 | 316 | 250 | |
| S1CB-45-16WD | M45X2 | G1 " X11 | 35 | 40 | 46 | 17.5 | 18 | 39 | 46 | 50 | 226 | 250 | |
| S1CB-45-20WD | M45X2 | G1.1/4 " X11 | 35 | 50 | 48 | 17.5 | 20 | 39 | 50 | 50 | 272 | 250 | |
| S1CB-45-24WD | M45X2 | G1.1/2 " X11 | 35 | 55 | 52 | 19.5 | 22 | 41 | 55 | 50 | 423 | 250 | |
| S1CB-52-16WD | M52X2 | G1 " X11 | 42 | 40 | 48 | 19 | 18 | 42 | 55 | 60 | 324 | 250 | |
| S1CB-52-20WD | M52X2 | G1.1/4 " X11 | 42 | 50 | 50 | 19 | 20 | 42 | 55 | 60 | 348 | 250 | |
| S1CB-52-24WD | M52X2 | G1.1/2 " X11 | 42 | 55 | 52 | 19 | 22 | 42 | 55 | 60 | 343 | 250 | |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1CB-30-12WD/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example S1CB-30-12WD/RN.

S1DB-WD


S1DB-WD/RN

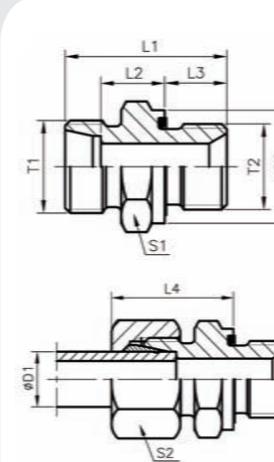

A类

英管螺纹胶垫密封柱端或60° 锥密封
BSP THREAD WITH CAPTIVE SEAL OR 60° SEAT SEALING


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | | 重量 克/件 | 工作压力 (bar) | 系列 | |
|----------------|-----------|------------|------|----|---------------|------|----|----|----|-----------|---------------|-----|--|
| | T1 | T2 | D1 | D2 | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1DB-14-02WD | M14X1.5 | G1/8 " X28 | 06 | 14 | 27.5 | 12.5 | 8 | 27 | 14 | 17 | 21 | 500 | |
| S1DB-14-04WD | M14X1.5 | G1/4 " X19 | 06 | 19 | 32 | 13 | 12 | 28 | 19 | 17 | 35 | 800 | |
| S1DB-14-06WD | M14X1.5 | G3/8 " X19 | 06 | 22 | 34.5 | 15.5 | 12 | 30 | 22 | 17 | 52 | 630 | |
| S1DB-14-08WD | M14X1.5 | G1/2 " X14 | 06 | 27 | 39 | 18 | 14 | 33 | 27 | 27 | 83 | 630 | |
| S1DB-16-04WD | M16X1.5 | G1/4 " X19 | 08 | 19 | 34 | 15 | 12 | 30 | 19 | 19 | 41 | 800 | |
| S1DB-16-06WD | M16X1.5 | G3/8 " X19 | 08 | 22 | 34.5 | 15.5 | 12 | 30 | 22 | 19 | 57 | 800 | |
| S1DB-16-08WD | M16X1.5 | G1/2 " X14 | 08 | 27 | 39 | 18 | 14 | 33 | 27 | 19 | 89 | 630 | |
| S1DB-18-04WD | M18X1.5 | G1/4 " X19 | 10 | 19 | 34 | 14.5 | 12 | 31 | 19 | 22 | 42 | 800 | |
| S1DB-18-06WD | M18X1.5 | G3/8 " X19 | 10 | 22 | 34.5 | 15 | 12 | 31 | 22 | 22 | 55 | 800 | |
| S1DB-18-08WD | M18X1.5 | G1/2 " X14 | 10 | 27 | 39 | 17.5 | 14 | 34 | 27 | 22 | 97 | 630 | |
| S1DB-20-04WD | M20X1.5 | G1/4 " X19 | 12 | 19 | 36 | 16.5 | 12 | 33 | 22 | 24 | 61 | 630 | |
| S1DB-20-06WD | M20X1.5 | G3/8 " X19 | 12 | 22 | 36.5 | 17 | 12 | 33 | 22 | 24 | 62 | 630 | |
| S1DB-20-08WD | M20X1.5 | G1/2 " X14 | 12 | 27 | 39 | | | | | | | | |

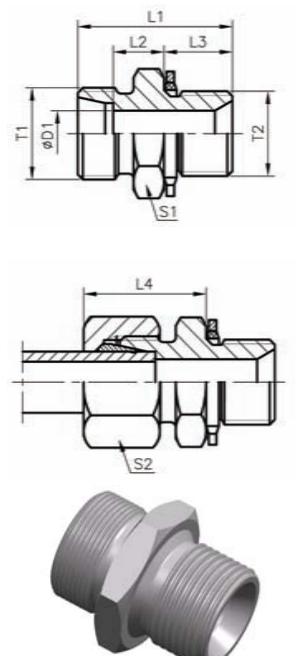**S1CM、S1DM
S1CM/RN、S1DM/RN**公制外螺纹60° 锥密封或组合垫密封两用柱端
METRIC MALE 60° SEAT SEALING OR BONDED SEAL STUD ENDS


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|---------|------------|---------------|------|----|----|----|----|-----------|---------------|----|
| | T1 | T2 | | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CM-12-10 | M12X1.5 | M10X1 | 06 | 23.5 | 8.5 | 8 | 23 | 14 | 14 | 13 | 500 | |
| S1CM-14-12 | M14X1.5 | M12X1.5 | 08 | 29 | 10 | 10 | 25 | 17 | 17 | 22 | 500 | |
| S1CM-14-18 | M14X1.5 | M18X1.5 | 08 | 30.5 | 11.5 | 12 | 26 | 24 | 17 | 23 | 500 | |
| S1CM-16-14 | M16X1.5 | M14X1.5 | 10 | 30 | 11 | 11 | 26 | 19 | 19 | 29 | 500 | |
| S1CM-16 | M16X1.5 | M16X1.5 | 10 | 31.5 | 12.5 | 12 | 24 | 22 | 19 | 39 | 420 | |
| S1CM-16-18 | M16X1.5 | M18X1.5 | 10 | 31.5 | 12.5 | 12 | 27 | 24 | 19 | 49 | 400 | |
| S1CM-16-22 | M16X1.5 | M22X1.5 | 10 | 35 | 14 | 14 | 29 | 27 | 19 | 79 | 400 | |
| S1CM-18-14 | M18X1.5 | M14X1.5 | 12 | 30 | 11 | 11 | 26 | 19 | 22 | 30 | 400 | |
| S1CM-18-16 | M18X1.5 | M16X1.5 | 12 | 31.5 | 12.5 | 12 | 27 | 22 | 22 | 39 | 400 | |
| S1CM-18 | M18X1.5 | M18X1.5 | 12 | 31.5 | 12.5 | 12 | 27 | 24 | 22 | 46 | 400 | |
| S1CM-18-22 | M18X1.5 | M22X1.5 | 12 | 35 | 14 | 14 | 29 | 27 | 22 | 73 | 400 | |
| S1CM-22-16 | M22X1.5 | M16X1.5 | 15 | 32 | 13 | 12 | 28 | 24 | 27 | 50 | 400 | |
| S1CM-22-18 | M22X1.5 | M18X1.5 | 15 | 32.5 | 13.5 | 12 | 29 | 24 | 27 | 63 | 400 | |
| S1CM-22 | M22X1.5 | M22X1.5 | 15 | 36 | 15 | 14 | 30 | 27 | 27 | 75 | 400 | |
| S1CM-26-18 | M26X1.5 | M18X1.5 | 18 | 33.5 | 14 | 12 | 30 | 27 | 32 | 67 | 400 | |
| S1CM-26-22 | M26X1.5 | M22X1.5 | 18 | 36 | 14.5 | 14 | 31 | 27 | 32 | 72 | 400 | |
| S1CM-30-22 | M30X2 | M22X1.5 | 22 | 38 | 16.5 | 14 | 33 | 32 | 36 | 94 | 250 | |
| S1CM-30-26 | M30X2 | M26X1.5 | 22 | 40 | 16.5 | 16 | 33 | 32 | 36 | 100 | 250 | |
| S1CM-30-27 | M30X2 | M27X2 | 22 | 42 | 18.5 | 16 | 35 | 32 | 36 | 164 | 250 | |
| S1CM-36-33 | M36X2 | M33X2 | 28 | 43 | 17.5 | 18 | 34 | 41 | 41 | 275 | 250 | |
| S1CM-45-42 | M45X2 | M42X2 | 35 | 48 | 17.5 | 20 | 39 | 50 | 50 | 350 | 250 | |
| S1CM-52-48 | M52X2 | M48X2 | 42 | 52 | 19 | 22 | 42 | 55 | 60 | 355 | 250 | |
| S1DM-14-12 | M14X1.5 | M12X1.5 | 06 | 32 | 13 | 10 | 28 | 17 | 17 | 41 | 800 | |
| S1DM-16-14 | M16X1.5 | M14X1.5 | 08 | 34 | 15 | 11 | 30 | 19 | 19 | 53 | 800 | |
| S1DM-18-16 | M18X1.5 | M16X1.5 | 10 | 34.5 | 15 | 12 | 31 | 22 | 22 | 59 | 800 | |
| S1DM-20-18 | M20X1.5 | M18X1.5 | 12 | 36.5 | 17 | 12 | 33 | 24 | 24 | 70 | 630 | |
| S1DM-20-22 | M20X1.5 | M22X1.5 | 12 | 39 | 17.5 | 14 | 34 | 27 | 24 | 100 | 630 | |
| S1DM-22-20 | M22X1.5 | M20X1.5 | 14 | 41 | 19 | 14 | 37 | 27 | 27 | 96 | 630 | |
| S1DM-24-18 | M24X1.5 | M18X1.5 | 16 | 38.5 | 18 | 12 | 36 | 27 | 30 | 86 | 630 | |
| S1DM-24-22 | M24X1.5 | M22X1.5 | 16 | 41 | 18.5 | 14 | 37 | 27 | 30 | 93 | 800 | |
| S1DM-30-27 | M30X2 | M27X2 | 20 | 47 | 20.5 | 16 | 42 | 32 | 36 | 147 | 420 | |
| S1DM-36-33 | M36X2 | M33X2 | 25 | 53 | 23 | 18 | 47 | 41 | 46 | 260 | 420 | |
| S1DM-42 | M42X2 | M42X2 | 30 | 57 | 23.5 | 20 | 50 | 50 | 50 | 415 | 420 | |
| S1DM-52-48 | M52X2 | M48X2 | 38 | 64 | 26 | 22 | 57 | 55 | 60 | 560 | 420 | |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1CM-30-27/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example S1CM-30-27/RN.

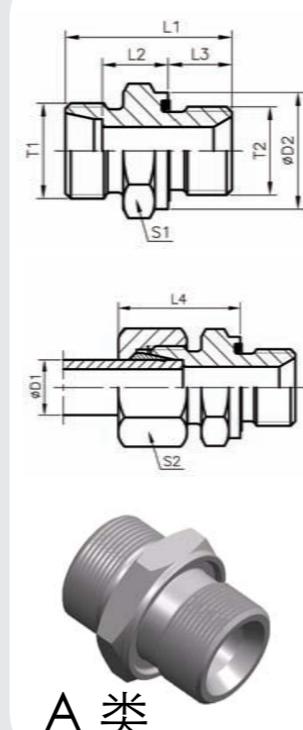**S1CM-WD、S1DM-WD
S1CM-WD/RN、S1DM-WD/RN**公制外螺纹胶垫密封柱端或60° 锥密封
METRIC THREAD WITH CAPTIVE SEAL OR 60° SEAT SEALING

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|---------|------------|---------------|------|------|----|----|----|-----------|---------------|-----|
| | T1 | T2 | | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CM-12-10WD | M12X1.5 | M10X1 | 06 | 14 | 23.5 | 8.5 | 8 | 23 | 14 | 14 | 13 | 500 |
| S1CM-14-12WD | M14X1.5 | M12X1.5 | 08 | 17 | 29 | 10 | 12 | 25 | 17 | 17 | 22 | 500 |
| S1CM-16-12WD | M16X1.5 | M12X1.5 | 10 | 17 | 30 | 11 | 12 | 26 | 17 | 19 | 23 | 500 |
| S1CM-16-14WD | M16X1.5 | M14X1.5 | 10 | 19 | 30 | 11 | 12 | 26 | 19 | 19 | 29 | 500 |
| S1CM-16WD | M16X1.5 | M16X1.5 | 10 | 22 | 31.5 | 12.5 | 12 | 24 | 22 | 19 | 40 | 420 |
| S1CM-16-18WD | M16X1.5 | M18X1.5 | 10 | 24 | 31.5 | 12.5 | 12 | 27 | 24 | 19 | 50 | 400 |
| S1CM-16-22WD | M16X1.5 | M22X1.5 | 10 | 27 | 35 | 14 | 14 | 29 | 27 | 19 | 80 | 400 |
| S1CM-18-14WD | M18X1.5 | M14X1.5 | 12 | 19 | 30 | 11 | 12 | 26 | 19 | 22 | 30 | 400 |
| S1CM-18-16WD | M18X1.5 | M16X1.5 | 12 | 22 | 31.5 | 12.5 | 12 | 27 | 22 | 22 | 40 | 400 |
| S1CM-18WD | M18X1.5 | M18X1.5 | 12 | 24 | 31.5 | 12.5 | 12 | 27 | 24 | 22 | 47 | 400 |
| S1CM-18-22WD | M18X1.5 | M22X1.5 | 12 | 27 | 35 | 14 | 14 | 29 | 27 | 22 | 75 | 400 |
| S1CM-22-16WD | M22X1.5 | M16X1.5 | 15 | 22 | 32 | 13 | 12 | 28 | 24 | 27 | 64 | 400 |
| S1CM-22-18WD | M22X1.5 | M18X1.5 | 15 | 24 | 32.5 | 13.5 | 12 | 29 | 24 | 27 | 51 | 400 |
| S1CM-22WD | M22X1.5 | M22X1.5 | 15 | 27 | 36 | 15 | 14 | 30 | 27 | 27 | 77 | 400 |
| S1CM-26-18WD | M26X1.5 | M18X1.5 | 18 | 24 | 33.5 | 14 | 12 | 30 | 27 | 32 | 68 | 400 |
| S1CM-26-22WD | M26X1.5 | M22X1.5 | 18 | 27 | 36 | 14.5 | 14 | 31 | 27 | 32 | 74 | 400 |
| S1CM-30-22WD | M30X2 | M22X1.5 | 22 | 32 | 27 | 16.5 | 14 | 33 | 32 | 36 | 97 | 250 |
| S1CM-30-26WD | M30X2 | M26X1.5 | 22 | 32 | 40 | 16.5 | 16 | 33 | 32 | 36 | 103 | 250 |
| S1CM-30-27WD | M30X2 | M27X2 | 22 | | | | | | | | | |

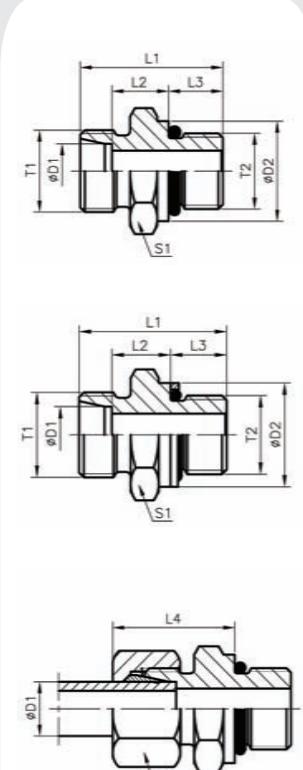**S1CG、S1DG
S1CG/RN、S1DG/RN**英管螺纹O型圈密封柱端
BSP THREAD STUD ENDS WITH O-RING SEALING


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | | 重量 克/件 | 工作压力 (bar) | 系列 | |
|----------------|-----------|-----------|------|----|---------------|------|----|------|----|-----------|---------------|-----|--|
| | T1 | T2 | D1 | D2 | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CG-12-02 | M12X1.5 | G1/8"X28 | 06 | 14 | 23.5 | 8.5 | 8 | 23 | 14 | 14 | 14 | 315 | |
| S1CG-12-04 | M12X1.5 | G1/4"X19 | 06 | 18 | 29 | 10 | 12 | 25 | 19 | 14 | 60 | 315 | |
| S1CG-12-06 | M12X1.5 | G3/8"X19 | 06 | 22 | 30.5 | 11.5 | 12 | 26 | 22 | 14 | 45 | 315 | |
| S1CG-12-08 | M12X1.5 | G1/2"X14 | 06 | 26 | 33 | 12 | 14 | 27 | 27 | 14 | 60 | 315 | |
| S1CG-14-02 | M14X1.5 | G1/8"X28 | 08 | 14 | 23.5 | 8.5 | 8 | 23 | 14 | 17 | 16 | 315 | |
| S1CG-14-04 | M14X1.5 | G1/4"X19 | 08 | 18 | 29 | 10 | 12 | 25 | 19 | 17 | 26 | 315 | |
| S1CG-14-06 | M14X1.5 | G3/8"X19 | 08 | 22 | 30.5 | 11.5 | 12 | 26 | 22 | 17 | 44 | 315 | |
| S1CG-14-08 | M14X1.5 | G1/2"X14 | 08 | 26 | 33 | 12 | 14 | 27 | 27 | 17 | 74 | 315 | |
| S1CG-16-02 | M16X1.5 | G1/8"X28 | 10 | 14 | 25.5 | 10.5 | 8 | 25 | 17 | 19 | 21 | 315 | |
| S1CG-16-04 | M16X1.5 | G1/4"X19 | 10 | 18 | 30 | 11 | 12 | 26 | 19 | 19 | 31 | 315 | |
| S1CG-16-06 | M16X1.5 | G3/8"X19 | 10 | 22 | 31.5 | 12.5 | 12 | 27 | 22 | 19 | 44 | 315 | |
| S1CG-16-08 | M16X1.5 | G1/2"X14 | 10 | 26 | 34 | 13 | 14 | 28 | 27 | 19 | 72 | 315 | |
| S1CG-18-02 | M18X1.5 | G1/8"X28 | 12 | 14 | 26.5 | 11.5 | 8 | 26 | 19 | 22 | 27 | 315 | |
| S1CG-18-04 | M18X1.5 | G1/4"X19 | 12 | 18 | 31 | 12 | 12 | 27 | 19 | 22 | 32 | 315 | |
| S1CG-18-06 | M18X1.5 | G3/8"X19 | 12 | 22 | 31.5 | 12.5 | 12 | 27 | 22 | 22 | 43 | 315 | |
| S1CG-18-08 | M18X1.5 | G1/2"X14 | 12 | 26 | 34 | 13 | 14 | 28 | 27 | 22 | 67 | 315 | |
| S1CG-18-12 | M18X1.5 | G3/4"X14 | 12 | 32 | 37 | 14 | 16 | 29 | 32 | 22 | 120 | 315 | |
| S1CG-22-06 | M22X1.5 | G3/8"X19 | 15 | 22 | 32.5 | 13.5 | 12 | 29 | 24 | 27 | 56 | 250 | |
| S1CG-22-08 | M22X1.5 | G1/2"X14 | 15 | 26 | 35 | 14 | 14 | 29 | 27 | 27 | 72 | 250 | |
| S1CG-22-12 | M22X1.5 | G3/4"X14 | 15 | 32 | 38 | 15 | 16 | 30 | 32 | 27 | 118 | 250 | |
| S1CG-26-06 | M26X1.5 | G3/8"X19 | 18 | 22 | 33.5 | 14 | 12 | 29.5 | 27 | 32 | 69 | 250 | |
| S1CG-26-08 | M26X1.5 | G1/2"X14 | 18 | 26 | 36 | 14.5 | 14 | 31 | 27 | 32 | 72 | 250 | |
| S1CG-26-12 | M26X1.5 | G3/4"X14 | 18 | 32 | 38 | 14.5 | 16 | 30 | 32 | 32 | 112 | 250 | |
| S1CG-30-08 | M30X2 | G1/2"X14 | 22 | 26 | 38 | 16.5 | 14 | 33 | 32 | 36 | 91 | 160 | |
| S1CG-30-12 | M30X2 | G3/4"X14 | 22 | 32 | 40 | 16.5 | 16 | 33 | 32 | 36 | 103 | 160 | |
| S1CG-30-16 | M30X2 | G1"X11 | 22 | 39 | 43 | 17.5 | 18 | 33.5 | 41 | 36 | 184 | 160 | |
| S1CG-36-08 | M36X2 | G1/2"X14 | 28 | 26 | 39 | 17.5 | 14 | 34 | 41 | 41 | 141 | 160 | |
| S1CG-36-12 | M36X2 | G3/4"X14 | 28 | 32 | 41 | 17.5 | 16 | 34 | 41 | 41 | 156 | 160 | |
| S1CG-36-16 | M36X2 | G1"X11 | 28 | 39 | 43 | 17.5 | 18 | 34 | 41 | 41 | 168 | 160 | |
| S1CG-36-20 | M36X2 | G1.1/4X11 | 28 | 50 | 46 | 18.3 | 20 | 35 | 50 | 41 | 314 | 160 | |
| S1CG-45-12 | M45X2 | G3/4"X14 | 35 | 32 | 44 | 17.5 | 16 | 39 | 46 | 50 | 202 | 160 | |
| S1CG-45-16 | M45X2 | G1"X11 | 35 | 39 | 46 | 17.5 | 18 | 39 | 46 | 50 | 234 | 160 | |
| S1CG-45-20 | M45X2 | G1.1/4X11 | 35 | 50 | 48 | 17.5 | 20 | 39 | 50 | 50 | 276 | 160 | |
| S1CG-45-24 | M45X2 | G1.1/2X11 | 35 | 55 | 52 | 19.5 | 22 | 41 | 55 | 50 | 355 | 160 | |
| S1CG-52-16 | M52X2 | G1"X11 | 42 | 39 | 48 | 19 | 18 | 42 | 55 | 60 | 327 | 160 | |
| S1CG-52-20 | M52X2 | G1.1/4X11 | 42 | 49 | 50 | 19 | 20 | 42 | 55 | 60 | 336 | 160 | |
| S1CG-52-24 | M52X2 | G1.1/2X11 | 42 | 55 | 52 | 19 | 22 | 42 | 55 | 60 | 349 | 160 | |
| S1DG-14-02 | M14X1.5 | G1/8"X28 | 06 | 14 | 27.5 | 12.5 | 8 | 27 | 14 | 17 | 22 | 400 | |
| S1DG-14-04 | M14X1.5 | G1/4"X19 | 06 | 18 | 32 | 13 | 12 | 28 | 19 | 17 | 35 | 400 | |
| S1DG-14-06 | M14X1.5 | G3/8"X19 | 06 | 22 | 34.5 | 15.5 | 12 | 30 | 22 | 17 | 57 | 400 | |
| S1DG-14-08 | M14X1.5 | G1/2"X14 | 06 | 26 | 39 | 18 | 14 | 33 | 27 | 17 | 83 | 400 | |
| S1DG-16-04 | M16X1.5 | G1/4"X19 | 08 | 18 | 34 | 15 | 12 | 30 | 19 | 19 | 41 | 400 | |
| S1DG-16-06 | M16X1.5 | G3/8"X19 | 08 | 22 | 34.5 | 15.5 | 12 | 30 | 22 | 19 | 59 | 400 | |
| S1DG-16-08 | M16X1.5 | G1/2"X14 | 08 | 26 | 39 | 18 | 14 | 33 | 27 | 19 | 100 | 400 | |
| S1DG-18-04 | M18X1.5 | G1/4"X19 | 10 | 18 | 34 | 14.5 | 12 | 31 | 19 | 22 | 43 | 400 | |
| S1DG-18-06 | M18X1.5 | G3/8"X19 | 10 | 22 | 34.5 | 15 | 12 | 31 | 22 | 22 | 56 | 400 | |
| S1DG-18-08 | M18X1.5 | G1/2"X14 | 10 | 26 | 39 | 17.5 | 14 | 34 | 27 | 22 | 97 | 400 | |
| S1DG-20-04 | M20X1.5 | G1/4"X19 | 12 | 18 | 36 | 16.5 | 12 | 33 | 22 | 24 | 57 | 400 | |
| S1DG-20-06 | M20X1.5 | G3/8"X19 | 12 | 22 | 36.5 | 17 | 12 | 33 | 22 | 24 | 62 | 400 | |
| S1DG-20-08 | M20X1.5 | G1/2"X14 | 12 | 26 | 39 | 17.5 | 14 | 34 | 27 | 24 | 57 | 400 | |

A类

A类

**S1CG、S1DG
S1CG/RN、S1DG/RN**英管螺纹O型圈密封柱端
BSP THREAD STUD ENDS WITH O-RING SEALING

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | | 重量 克/件 | 工作压力 (bar) | 系列 | |
|----------------|-----------|----------|------|----|---------------|------|----|----|----|-----------|---------------|-----|--|
| | T1 | T2 | D1 | D2 | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1DG-22-06 | M22X1.5 | G3/8"X19 | 14 | 22 | 38.5 | 18.5 | 12 | 36 | 24 | 27 | 74 | 400 | |
| S1DG | | | | | | | | | | | | | |

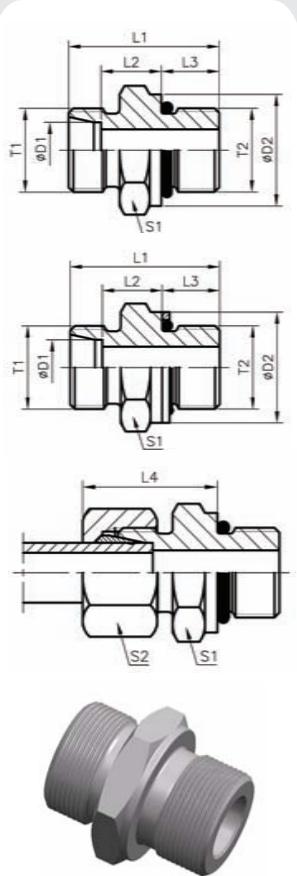S1CH、S1DH
S1CH/RN、S1DH/RN

 公制外螺纹柱端ISO 6149
 METRIC THREAD STUD ENDS ISO 6149



| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|---------|------|------|---------------|------|------|------|----|----|-----------|---------------|----|
| | T1 | T2 | D1 | D2 | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CH-12-10 | M12X1.5 | M10X1 | 06 | 14 | 24 | 8.5 | 8.5 | 23 | 14 | 14 | 15 | 500 | |
| S1CH-14-12 | M14X1.5 | M12X1.5 | 08 | 17 | 28 | 10 | 11 | 25 | 17 | 17 | 23 | 500 | |
| S1CH-16-14 | M16X1.5 | M14X1.5 | 10 | 19 | 29 | 11 | 11 | 26 | 19 | 19 | 28 | 500 | |
| S1CH-16 | M16X1.5 | M16X1.5 | 10 | 22 | 31 | 12.5 | 11.5 | 27.5 | 22 | 22 | 40 | 420 | |
| S1CH-18-16 | M18X1.5 | M16X1.5 | 12 | 22 | 31 | 12.5 | 11.5 | 27 | 22 | 22 | 42 | 400 | |
| S1CH-18 | M18X1.5 | M18X1.5 | 12 | 24 | 33 | 13.5 | 12.5 | 28 | 24 | 22 | 51 | 400 | |
| S1CH-22-18 | M22X1.5 | M18X1.5 | 15 | 24 | 33 | 13.5 | 12.5 | 29 | 24 | 27 | 56 | 400 | |
| S1CH-22 | M22X1.5 | M22X1.5 | 15 | 27 | 34.5 | 14.5 | 13 | 30 | 27 | 27 | 74 | 400 | |
| S1CH-26-22 | M26X1.5 | M22X1.5 | 18 | 27 | 35 | 14.5 | 13 | 31 | 27 | 32 | 80 | 400 | |
| S1CH-26 | M26X1.5 | M26X1.5 | 18 | 31.9 | 38 | 14.5 | 16 | 31 | 32 | 32 | 108 | 400 | |
| S1CH-30-26 | M30X2 | M26X1.5 | 22 | 31.9 | 40 | 16.5 | 16 | 33 | 32 | 36 | 107 | 250 | |
| S1CH-30-27 | M30X2 | M27X2 | 22 | 32 | 40 | 16.5 | 16 | 33 | 32 | 36 | 104 | 250 | |
| S1CH-36-33 | M36X2 | M33X2 | 28 | 41 | 41 | 17.5 | 16 | 34 | 41 | 41 | 171 | 250 | |
| S1CH-45-42 | M45X2 | M42X2 | 35 | 50 | 44 | 17.5 | 16 | 39 | 50 | 50 | 278 | 250 | |
| S1CH-52-48 | M52X2 | M48X2 | 42 | 55 | 47.5 | 19 | 17.5 | 42 | 55 | 60 | 340 | 250 | |
| S1DH-14-12 | M14X1.5 | M12X1.5 | 06 | 17 | 31 | 13 | 11 | 28 | 17 | 17 | 29 | 800 | |
| S1DH-16-14 | M16X1.5 | M14X1.5 | 08 | 19 | 33 | 15 | 11 | 30 | 19 | 19 | 37 | 800 | |
| S1DH-16 | M16X1.5 | M16X1.5 | 08 | 22 | 35 | 15 | 12.5 | 31 | 22 | 19 | 50 | 800 | |
| S1DH-18-16 | M18X1.5 | M16X1.5 | 10 | 22 | 35 | 15 | 12.5 | 31 | 22 | 22 | 55 | 800 | |
| S1DH-18 | M18X1.5 | M18X1.5 | 10 | 24 | 38.5 | 17 | 14 | 33 | 24 | 22 | 71 | 630 | |
| S1DH-20-18 | M20X1.5 | M18X1.5 | 12 | 24 | 38.5 | 17 | 14 | 33 | 24 | 24 | 73 | 630 | |
| S1DH-24-22 | M24X1.5 | M22X1.5 | 16 | 27 | 42 | 18.5 | 15 | 37 | 27 | 30 | 102 | 630 | |
| S1DH-30-27 | M30X2 | M27X2 | 20 | 32 | 49.5 | 20.5 | 18.5 | 42 | 32 | 36 | 169 | 420 | |
| S1DH-36-33 | M36X2 | M33X2 | 25 | 41 | 53.5 | 23 | 18.5 | 47 | 41 | 46 | 274 | 420 | |
| S1DH-42 | M42X2 | M42X2 | 30 | 50 | 56 | 23 | 19 | 50 | 50 | 50 | 412 | 420 | |
| S1DH-52-48 | M52X2 | M48X2 | 38 | 55 | 63.5 | 26 | 21.5 | 57 | 55 | 60 | 580 | 420 | |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1CH-30-27/RN；
 需配挡圈请在代号后加“DQ”，如S1CH-30-27DQ。
 Note: In case if you are interested to order the adapter in complete set with cutting ring and nut,
 it is necessary to insert suffix "RN" after our part NO, for example S1CH-30-27/RN;with
 retainer ring please insert suffix "DQ" after our part NO,for example S1CH-30-27DQ.

S1CO、S1DO
S1CO/RN、S1DO/RN


 美制螺纹O型圈密封柱端ISO 11926
 UN、UNF THREAD STUD ENDS WITH O-RING SEALING ISO 11926

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|--------------|------|------|---------------|------|------|----|----|----|-----------|---------------|----|
| | T1 | T2 | D1 | D2 | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CO-14-04 | M14X1.5 | 7/16"X20UNF | 08 | - | 26 | 10 | 9 | 25 | 17 | 17 | 21 | 315 | |
| S1CO-16-04 | M16X1.5 | 7/16"X20UNF | 10 | - | 27 | 11 | 9 | 26 | 17 | 19 | 23 | 315 | |
| S1CO-18-06 | M18X1.5 | 9/16"X18UNF | 12 | - | 28 | 11 | 10 | 26 | 19 | 22 | 32 | 315 | |
| S1CO-18-08 | M18X1.5 | 3/4"X16UNF | 12 | - | 31 | 13 | 11 | 28 | 24 | 22 | 52 | 315 | |
| S1CO-18-10 | M18X1.5 | 7/8"X14UNF | 12 | - | 34 | 14.3 | 12.7 | 29 | 27 | 22 | 77 | 315 | |
| S1CO-22-08 | M22X1.5 | 3/4"X16UNF | 15 | - | 32 | 14 | 11 | 29 | 24 | 27 | 57 | 315 | |
| S1CO-22-10 | M22X1.5 | 7/8"X14UNF | 15 | - | 35 | 15.3 | 12.7 | 30 | 27 | 27 | 81 | 315 | |
| S1CO-26-08 | M26X1.5 | 3/4"X16UNF | 18 | 23.9 | 33 | 14.5 | 11 | 31 | 27 | 32 | 68 | 315 | |
| S1CO-26-10 | M26X1.5 | 7/8"X14UNF | 18 | - | 35 | 14.8 | 12.7 | 31 | 27 | 32 | 72 | 315 | |
| S1CO-30-10 | M30X2 | 7/8"X14UNF | 22 | 26.9 | 37 | 16.8 | 12.7 | 33 | 32 | 36 | 94 | 160 | |
| S1CO-30-12 | M30X2 | 1.1/16"X12UN | 22 | - | 39 | 16.5 | 15 | 33 | 32 | 36 | 103 | 160 | |
| S1CO-30-16 | M30X2 | 1.5/16"X12UN | 22 | - | 40 | 17.5 | 15 | 34 | 41 | 36 | 163 | 160 | |
| S1CO-36-12 | M36X2 | 1.1/16"X12UN | 28 | 33.3 | 40 | 17.5 | 15 | 34 | 41 | 41 | 152 | 160 | |
| S1CO-36-16 | M36X2 | 1.5/16"X12UN | 28 | - | 40 | 17.5 | 15 | 34 | 41 | 41 | 163 | 160 | |
| S1CO-45-16 | M45X2 | 1.5/16"X12UN | 35 | 39.6 | 43 | 17.5 | 15 | 39 | 46 | 50 | 222 | 160 | |
| S1CO-45-20 | M45X2 | 1.5/8"X12UN | 35 | - | 43 | 17.5 | 15 | 39 | 50 | 50 | 257 | 160 | |
| S1CO-52-20 | M52X2 | 1.5/8"X12UN | 42 | 47.7 | 45 | 19 | 15 | 42 | 55 | 60 | 339 | 160 | |
| S1DO-16-04 | M16X1.5 | 7/16"X20UNF | 08 | - | 31 | 13 | 11 | 30 | 17 | 19 | 33 | 630 | |
| S1DO-18-06 | M18X1.5 | 9/16"X18UNF | 10 | - | 32 | 12.5 | 12 | 31 | 19 | 22 | 42 | 630 | |
| S1DO-20-06 | M20X1.5 | 9/16"X18UNF | 12 | 19 | 32 | 12.5 | 12 | 31 | 22 | 24 | 50 | 630 | |
| S1DO-20-08 | M20X1.5 | 3/4"X16UNF | 12 | - | 36 | 14.5 | 14 | 34 | 24 | 24 | 73 | 630 | |
| S1DO-24-08 | M24X1.5 | 3/4"X16UNF | 16 | - | 35 | 12.5 | 14 | 34 | 24 | 30 | 90 | 400 | |
| S1DO-24-10 | M24X1.5 | 7/8"X14UNF | 16 | - | 40 | | | | | | | | |

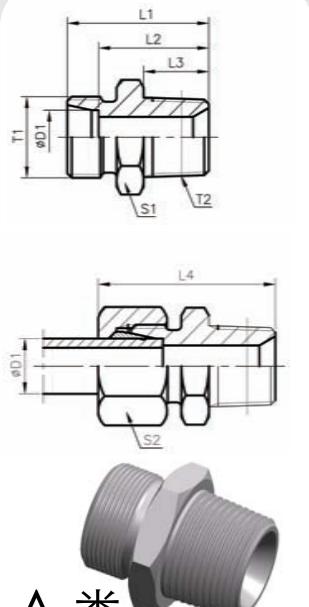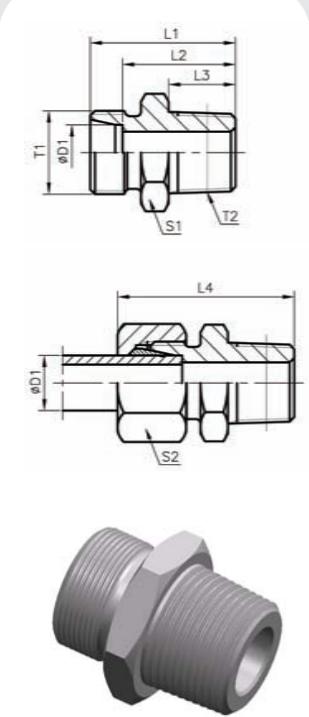S1CT-SP
S1CT-SP/RN**A类****S1CN、S1DN**
S1CN/RN、S1DN/RN英锥管外螺纹
BSPT MALE


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|------------|------------|---------------|------|----|----|----|----|-----------|---------------|----|
| | T1 | T2 | | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CT-12-02SP | M12X1.5 | R1/8"X28 | 06 | 22 | 15 | 8 | 30 | 12 | 14 | 11 | 315 | |
| S1CT-12-04SP | M12X1.5 | R1/4"X19 | 06 | 27 | 20 | 12 | 35 | 17 | 14 | 24 | 315 | |
| S1CT-14-02SP | M14X1.5 | R1/8"X28 | 08 | 23 | 16 | 8 | 31 | 17 | 17 | 15 | 315 | |
| S1CT-14-04SP | M14X1.5 | R1/4"X19 | 08 | 27 | 20 | 12 | 35 | 17 | 17 | 22 | 315 | |
| S1CT-16-04SP | M16X1.5 | R1/4"X19 | 10 | 28 | 21 | 12 | 36 | 17 | 19 | 24 | 315 | |
| S1CT-18-04SP | M18X1.5 | R1/4"X19 | 12 | 29 | 22 | 12 | 37 | 19 | 22 | 53 | 315 | |
| S1CT-18-06SP | M18X1.5 | R3/8"X19 | 12 | 29 | 22 | 12 | 37 | 19 | 22 | 33 | 315 | |
| S1CT-18-08SP | M18X1.5 | R1/2"X14 | 12 | 31 | 24 | 14 | 39 | 24 | 22 | 53 | 315 | |
| S1CT-22-06SP | M22X1.5 | R3/8"X19 | 15 | 30 | 23 | 12 | 38 | 24 | 27 | 49 | 315 | |
| S1CT-22-08SP | M22X1.5 | R1/2"X14 | 15 | 32 | 25 | 14 | 40 | 24 | 27 | 59 | 315 | |
| S1CT-26-08SP | M26X1.5 | R1/2"X14 | 18 | 33 | 25.5 | 14 | 42 | 27 | 32 | 64 | 315 | |
| S1CT-30-12SP | M30X2 | R3/4"X14 | 22 | 37 | 29.5 | 16 | 46 | 32 | 36 | 99 | 160 | |
| S1CT-36-16SP | M36X2 | R1"X11 | 28 | 40 | 32.5 | 18 | 49 | 41 | 41 | 154 | 160 | |
| S1CT-45-20SP | M45X2 | R1.1/4"X11 | 35 | 45 | 34.5 | 20 | 56 | 46 | 50 | 238 | 160 | |
| S1CT-52-24SP | M52X2 | R1.1/2"X11 | 42 | 49 | 38 | 22 | 61 | 55 | 60 | 335 | 160 | |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1CT-30-12SP/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO, for example S1CT-30-12SP/RN.

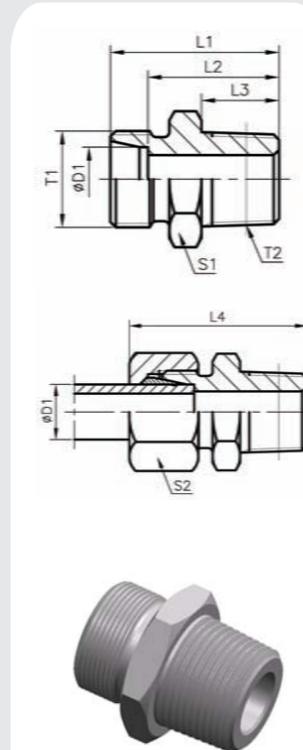S1CN、S1DN
S1CN/RN、S1DN/RN布锥管外螺纹
NPT MALE

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|----------------|------------|---------------|------|------|----|----|----|-----------|---------------|----|
| | T1 | T2 | | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CN-30-06 | M30X2 | NPT3/8"X18 | 22 | 36.5 | 29 | 14.5 | 45 | 32 | 36 | 91 | 315 | |
| S1CN-30-08 | M30X2 | NPT1/2"X14 | 22 | 41 | 33.5 | 19.5 | 50 | 32 | 36 | 96 | 160 | |
| S1CN-30-12 | M30X2 | NPT3/4"X14 | 22 | 41 | 33.5 | 19.5 | 50 | 32 | 36 | 108 | 160 | |
| S1CN-30-16 | M30X2 | NPT1"X11.5 | 22 | 47 | 39.5 | 24.5 | 56 | 36 | 36 | 174 | 160 | |
| S1CN-36-12 | M36X2 | NPT3/4"X14 | 28 | 42 | 34.5 | 19.5 | 51 | 41 | 41 | 157 | 160 | |
| S1CN-36-16 | M36X2 | NPT1"X11.5 | 28 | 47 | 39.5 | 24.5 | 56 | 41 | 41 | 197 | 160 | |
| S1CN-36-20 | M36X2 | NPT1.1/4"X11.5 | 28 | 49 | 41.5 | 25 | 58 | 46 | 41 | 266 | 160 | |
| S1CN-45-16 | M45X2 | NPT1"X11.5 | 35 | 50 | 39.5 | 24.5 | 61 | 46 | 50 | 280 | 160 | |
| S1CN-45-20 | M45X2 | NPT1.1/4"X11.5 | 35 | 51 | 40.5 | 25 | 62 | 46 | 50 | 285 | 160 | |
| S1CN-52-20 | M52X2 | NPT1.1/4"X11.5 | 42 | 53 | 42 | 25 | 65 | 55 | 60 | 382 | 160 | |
| S1CN-52-24 | M52X2 | NPT1.1/2"X11.5 | 42 | 53 | 42 | 26 | 65 | 55 | 60 | 377 | 160 | |
| S1DN-14-02 | M14X1.5 | NPT1/8"X27 | 06 | 28 | 21 | 10 | 36 | 14 | 17 | 21 | 630 | |
| S1DN-14-04 | M14X1.5 | NPT1/4"X18 | 06 | 35 | 28 | 14.5 | 43 | 17 | 17 | 37 | 630 | |
| S1DN-14-06 | M14X1.5 | NPT3/8"X18 | 06 | 33 | 26 | 14.5 | 41 | 19 | 17 | 40 | 630 | |
| S1DN-14-08 | M14X1.5 | NPT1/2"X14 | 06 | 42 | 35 | 19.5 | 50 | 22 | 17 | 71 | 630 | |
| S1DN-16-04 | M16X1.5 | NPT1/4"X18 | 08 | 35 | 28 | 14.5 | 43 | 17 | 19 | 38 | 630 | |
| S1DN-16-06 | M16X1.5 | NPT3/8"X18 | 08 | 35 | 28 | 14.5 | 43 | 19 | 19 | 46 | 630 | |
| S1DN-16-08 | M16X1.5 | NPT1/2"X14 | 08 | 42 | 35 | 19.5 | 50 | 22 | 19 | 73 | 630 | |
| S1DN-18-04 | M18X1.5 | NPT1/4"X18 | 10 | 35 | 27.5 | 14.5 | 44 | 19 | 22 | 45 | 630 | |
| S1DN-18-06 | M18X1.5 | NPT3/8"X18 | 10 | 35 | 27.5 | 14.5 | 44 | 19 | 22 | 49 | 630 | |
| S1DN-18-08 | M18X1.5 | NPT1/2"X14 | 10 | 42 | 34.5 | 19.5 | 51 | 22 | 22 | 73 | 630 | |
| S1DN-18-12 | M18X1.5 | NPT3/4"X14 | 10 | 44 | 36.5 | 19.5 | 53 | 30 | 22 | 125 | 630 | |
| S1DN-20-04 | M20X1.5 | NPT1/4"X18 | 12 | 37 | 29.5 | 14.5 | 46 | 22 | 24 | 57 | 630 | |
| S1DN-20-06 | M20X1.5 | NPT3/8"X18 | 12 | 37 | 29.5 | 14.5 | 46 | 22 | 24 | 62 | 630 | |
| S1DN-20-08 | M20X1.5 | NPT1/2"X14 | 12 | 42 | 34.5 | 19.5 | 51 | 22 | 24 | 83 | 630 | |
| S1DN-20-12 | M20X1.5 | NPT3/4"X14 | 12 | 44 | 36.5 | 19.5 | 53 | 30 | 24 | 126 | 630 | |
| S1DN-22-06 | M22X1.5 | NPT3/8"X18 | 14 | 39 | 31 | 14.5 | 49 | 24 | 27 | 77 | 630 | |
| S1DN-22-08 | M22X1.5 | NPT1/2"X14 | 14 | 44 | 36 | 19.5 | 54 | 24 | 27 | 89 | 630 | |
| S1DN-22-12 | M22X1.5 | NPT3/4"X14 | 14 | 46 | 38 | 19.5 | 56 | 30 | 27 | 130 | 630 | |
| S1DN-22-16 | M22X1.5 | NPT1"X11.5 | 14 | 51 | 43 | 24.5 | 61 | 36 | 27 | 180 | 630 | |
| S1DN-24-06 | M24X1.5 | NPT3/8"X18 | 16 | 39 | 30.5 | 14.5 | 49 | 27 | 30 | 84 | 400 | |
| S1DN-24-08 | M24X1.5 | NPT1/2"X14 | 16 | 48 | 39.5 | 19.5 | 58 | 27 | 30 | 97 | 400 | |
| S1DN-24-12 | M24X1.5 | NPT3/4"X14 | 16 | 46 | 37.5 | 19.5 | 56 | 30 | 30 | 130 | 400 | |
| S1DN-24-16 | M24X1.5 | NPT1"X11.5 | 16 | 53 | 44.5 | 24.5 | 61 | 36 | 30 | 178 | 400 | |
| S1DN-30-08 | M30X2 | NPT1/2"X14 | 20 | 48 | 37.5 | 19.5 | 59 | 32 | 36 | 144 | 400 | |
| S1DN-30-12 | M30X2 | NPT | | | | | | | | | | |


**S2HC-W
S2HD-W**



| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | 重量 克/件 | 工作压力 (Bar) | 系列 |
|----------------|-----------|---------|------|------|---------------|------|----|----|-----------|---------------|----|
| | T1 | T2 | D1 | D2 | L1 | L2 | S1 | S2 | | | |
| S2HC-10-12W | M10X1 | M12X1.5 | 06 | 13.8 | 24.5 | 8.5 | 14 | 14 | 29 | 500 | L |
| S2HC-12-14W | M12X1.5 | M14X1.5 | 08 | 16.8 | 26.5 | 11 | 17 | 17 | 43 | 500 | |
| S2HC-14-16W | M14X1.5 | M16X1.5 | 10 | 18.8 | 27.5 | 11 | 19 | 19 | 57 | 500 | |
| S2HC-16-18W | M16X1.5 | M18X1.5 | 12 | 21.8 | 30.5 | 11.5 | 22 | 22 | 85 | 400 | |
| S2HC-18-22W | M18X1.5 | M22X1.5 | 15 | 23.8 | 31.5 | 12.5 | 24 | 27 | 115 | 400 | |
| S2HC-22-26W | M22X1.5 | M26X1.5 | 18 | 26.8 | 31.5 | 13 | 27 | 32 | 452 | 400 | |
| S2HC-27-30W | M27X2 | M30X2 | 22 | 31.8 | 32.5 | 16 | 32 | 36 | 207 | 250 | |
| S2HC-33-36W | M33X2 | M36X2 | 28 | 40.8 | 35 | 16 | 41 | 41 | 294 | 250 | |
| S2HC-42-45W | M42X2 | M45X2 | 35 | 49.8 | 42.5 | 16 | 50 | 50 | 516 | 250 | |
| S2HC-48-52W | M48X2 | M52X2 | 42 | 54.8 | 46.5 | 17.5 | 55 | 60 | 718 | 250 | |
| S2HD-12-14W | M12X1.5 | M14X1.5 | 06 | 16.8 | 27 | 11 | 17 | 17 | 49 | 800 | |
| S2HD-14-16W | M14X1.5 | M16X1.5 | 08 | 18.8 | 29.5 | 11 | 19 | 19 | 69 | 800 | |
| S2HD-16-18W | M16X1.5 | M18X1.5 | 10 | 21.8 | 32 | 12.5 | 22 | 22 | 96 | 800 | |
| S2HD-18-20W | M18X1.5 | M20X1.5 | 12 | 23.8 | 34 | 14 | 24 | 24 | 116 | 630 | |
| S2HD-22-24W | M22X1.5 | M24X1.5 | 16 | 26.8 | 37 | 15 | 27 | 30 | 179 | 630 | |
| S2HD-27-30W | M27X2 | M30X2 | 20 | 31.8 | 43 | 18.5 | 32 | 36 | 280 | 420 | |
| S2HD-33-36W | M33X2 | M36X2 | 25 | 40.8 | 48 | 18.5 | 41 | 46 | 502 | 420 | |
| S2HD-42W | M42X2 | M42X2 | 30 | 49.8 | 51 | 19 | 50 | 50 | 697 | 420 | |
| S2HD-48-52W | M48X2 | M52X2 | 38 | 54.8 | 60 | 21.5 | 55 | 60 | 965 | 420 | |

注:若需配挡圈请在代号后加“DQ”，如S2HD-33-36WDQ
Note: If you interested to order the adapter with retainer ring, please insert suffix "DQ" after our Part No, for example S2HD-33-36WDQ


**S2MC-WDW
S2MD-WDW**




| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|---------|------|----|---------------|----|----|----|-----------|---------------|----|
| | T1 | T2 | D1 | D2 | L1 | L2 | S1 | S2 | | | |
| S2MC-10-12WDW | M10X1 | M12X1.5 | 06 | 14 | 24.5 | 8 | 14 | 14 | 27 | 500 | L |
| S2MC-12-14WDW | M12X1.5 | M14X1.5 | 08 | 17 | 26.5 | 12 | 17 | 17 | 45 | 500 | |
| S2MC-14-16WDW | M14X1.5 | M16X1.5 | 10 | 19 | 27.5 | 12 | 19 | 19 | 57 | 500 | |
| S2MC-16-18WDW | M16X1.5 | M18X1.5 | 12 | 22 | 30.5 | 12 | 22 | 22 | 82 | 400 | |
| S2MC-22-18WDW | M22X1.5 | M18X1.5 | 12 | 27 | 27 | 14 | 27 | 22 | 921 | 400 | |
| S2MC-18-22WDW | M18X1.5 | M22X1.5 | 15 | 24 | 31.5 | 12 | 24 | 27 | 113 | 400 | |
| S2MC-22WDW | M22X1.5 | M22X1.5 | 15 | 27 | 32 | 14 | 27 | 27 | 142 | 400 | |
| S2MC-22-26WDW | M22X1.5 | M26X1.5 | 18 | 27 | 31.5 | 14 | 27 | 32 | 148 | 400 | |
| S2MC-26-30WDW | M26X1.5 | M30X2 | 22 | 32 | 32.5 | 16 | 32 | 36 | 203 | 250 | |
| S2MC-33-36WDW | M33X2 | M36X2 | 28 | 40 | 35 | 18 | 41 | 41 | 289 | 250 | |
| S2MC-42-45WDW | M42X2 | M45X2 | 35 | 50 | 42.5 | 20 | 50 | 50 | 511 | 250 | |
| S2MC-48-52WDW | M48X2 | M52X2 | 42 | 55 | 46.5 | 22 | 55 | 60 | 711 | 250 | |
| S2MD-12-14WDW | M12X1.5 | M14X1.5 | 06 | 17 | 27 | 12 | 17 | 17 | 47 | 800 | |
| S2MD-14-16WDW | M14X1.5 | M16X1.5 | 08 | 19 | 29.5 | 12 | 19 | 19 | 65 | 800 | |
| S2MD-16-18WDW | M16X1.5 | M18X1.5 | 10 | 22 | 32 | 12 | 22 | 22 | 91 | 800 | |
| S2MD-18-20WDW | M18X1.5 | M20X1.5 | 12 | 24 | 34 | 12 | 24 | 24 | 112 | 630 | |
| S2MD-20-22WDW | M20X1.5 | M22X1.5 | 14 | 26 | 36.5 | 14 | 27 | 27 | 153 | 630 | |
| S2MD-22-24WDW | M22X1.5 | M24X1.5 | 16 | 27 | 37 | 14 | 27 | 30 | 174 | 630 | |
| S2MD-27-30WDW | M27X2 | M30X2 | 20 | 32 | 43 | 16 | 32 | 36 | 274 | 420 | |
| S2MD-33-36WDW | M33X2 | M36X2 | 25 | 40 | 48 | 18 | 41 | 46 | 497 | 420 | |
| S2MD-42WDW | M42X2 | M42X2 | 30 | 50 | 51 | 20 | 50 | 50 | 691 | 420 | |
| S2MD-48-52WDW | M48X2 | M52X2 | 38 | 55 | 60 | 22 | 55 | 60 | 957 | 420 | |

注:若需配挡圈请在代号后加“DQ”，如S2GC-12-30WDQ
Note: If you interested to order the adapter with retainer ring, please insert suffix "DQ" after our Part No, for example S2GC-12-30WDQ

**S2GC-W
S2GD-W**



| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | 重量 克/件 | 工作压力 (Bar) | 系列 |
|----------------|-----------|---------|------|----|---------------|----|----|----|-----------|---------------|----|
| | T1 | T2 | D1 | D2 | L1 | L2 | S1 | S2 | | | |
| S2GC-02-12W | G1/8"X28 | M12X1.5 | 06 | 14 | 24.5 | 8 | 14 | 14 | 29 | 500 | L |
| S2GC-04-14W | G1/4"X19 | M14X1.5 | 08 | 19 | 29.5 | 12 | 19 | 17 | 30 | 500 | |
| S2GC-04-16W | G1/4"X19 | M16X1.5 | 10 | 19 | 27.5 | 12 | 19 | 19 | 55 | 500 | |
| S2GC-06-16W | G3/8"X19 | M16X1.5 | 10 | 22 | 29 | 12 | 22 | 19 | 75 | 400 | |
| S2GC-06-18W | G3/8"X19 | M18X1.5 | 12 | 22 | 34 | 12 | 22 | 22 | 98 | 400 | |
| S2GC-04-18W | G1/4"X19 | M18X1.5 | 12 | 19 | 27.5 | 12 | 19 | 22 | 67 | 400 | |
| S2GC-08-18W | G1/2"X14 | M18X1.5 | 12 | 27 | 29.5 | 14 | 27 | 22 | 116 | 400 | |
| S2GC-08-22W | G1/2"X14 | M22X1.5 | 15 | 27 | 32 | 14 | 27 | 27 | 140 | | |

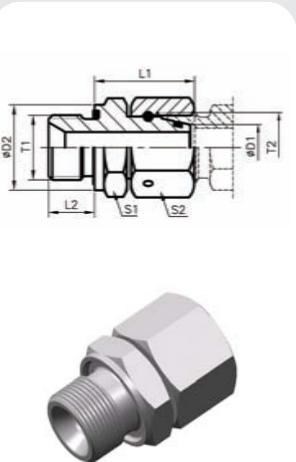S2BC-WDW
S2BD-WDW


E

卡套式

英管螺纹胶垫密封柱端或60° 锥密封/公制内螺纹24° 锥O型圈密封
BSP THREAD WITH CAPTIVE SEAL OR 60° SEAT SEALING/METRIC FEMALE 24° CONE O-RING SEALING


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 克/件 | 工作压力 (bar) | 系列 | | | |
|----------------|------------|---------|---------------|----|------|----|-----------|---------------|----|-----|-----|--|
| | T1 | T2 | D1 | D2 | L1 | L2 | S1 | S2 | | | | |
| S2BC-02-12WDW | G1/8"X28 | M12X1.5 | 06 | 14 | 24.5 | 8 | 14 | 14 | | 27 | 500 | |
| S2BC-04-14WDW | G1/4"X19 | M14X1.5 | 08 | 19 | 29.5 | 12 | 19 | 17 | | 26 | 500 | |
| S2BC-04-16WDW | G1/4"X19 | M16X1.5 | 10 | 19 | 27.5 | 12 | 19 | 19 | | 54 | 500 | |
| S2BC-06-16WDW | G3/8"X19 | M16X1.5 | 10 | 22 | 29 | 12 | 22 | 19 | | 70 | 400 | |
| S2BC-06-18WDW | G3/8"X19 | M18X1.5 | 12 | 22 | 34 | 12 | 22 | 22 | | 95 | 400 | |
| S2BC-04-18WDW | G1/4"X19 | M18X1.5 | 12 | 19 | 27.5 | 12 | 19 | 22 | | 65 | 400 | |
| S2BC-08-18WDW | G1/2"X14 | M18X1.5 | 12 | 27 | 29.5 | 14 | 27 | 22 | | 114 | 400 | |
| S2BC-08-22WDW | G1/2"X14 | M22X1.5 | 15 | 27 | 32 | 14 | 27 | 27 | | 137 | 400 | |
| S2BC-08-26WDW | G1/2"X14 | M26X1.5 | 18 | 27 | 31.5 | 14 | 27 | 32 | | 143 | 400 | |
| S2BC-12-26WDW | G3/4"X14 | M26X1.5 | 18 | 32 | 29.5 | 16 | 32 | 32 | | 182 | 250 | |
| S2BC-12-30WDW | G3/4"X14 | M30X2 | 22 | 32 | 32.5 | 16 | 32 | 36 | | 200 | 250 | |
| S2BC-16-36WDW | G1"X11 | M36X2 | 28 | 40 | 35 | 18 | 41 | 41 | | 289 | 250 | |
| S2BC-20-45WDW | G1.1/4"X11 | M45X2 | 35 | 50 | 42.5 | 20 | 50 | 50 | | 500 | 250 | |
| S2BC-24-52WDW | G1.1/2"X11 | M52X2 | 42 | 55 | 46.5 | 22 | 55 | 60 | | 718 | 250 | |
| S2BD-04-14WDW | G1/4"X19 | M14X1.5 | 06 | 19 | 27 | 12 | 19 | 17 | | 53 | 800 | |
| S2BD-04-16WDW | G1/4"X19 | M16X1.5 | 08 | 19 | 29.5 | 12 | 19 | 19 | | 64 | 800 | |
| S2BD-06-18WDW | G3/8"X19 | M18X1.5 | 10 | 22 | 32 | 12 | 22 | 22 | | 93 | 800 | |
| S2BD-06-20WDW | G3/8"X19 | M20X1.5 | 12 | 22 | 34 | 12 | 22 | 24 | | 100 | 630 | |
| S2BD-04-20WDW | G1/4"X19 | M20X1.5 | 12 | 19 | 31.5 | 12 | 19 | 24 | | 140 | 630 | |
| S2BD-08-20WDW | G1/2"X14 | M20X1.5 | 12 | 27 | 35 | 14 | 27 | 24 | | 140 | 630 | |
| S2BD-08-22WDW | G1/2"X14 | M22X1.5 | 14 | 27 | 36.5 | 14 | 27 | 27 | | 157 | 630 | |
| S2BD-08-24WDW | G1/2"X14 | M24X1.5 | 16 | 27 | 37 | 14 | 27 | 30 | | 170 | 630 | |
| S2BD-12-30WDW | G3/4"X14 | M30X2 | 20 | 32 | 43 | 16 | 32 | 36 | | 273 | 420 | |
| S2BD-16-36WDW | G1"X11 | M36X2 | 25 | 40 | 48 | 18 | 41 | 46 | | 493 | 420 | |
| S2BD-20-42WDW | G1.1/4"X11 | M42X2 | 30 | 50 | 51 | 20 | 50 | 50 | | 691 | 420 | |
| S2BD-24-52WDW | G1.1/2"X11 | M52X2 | 38 | 55 | 60 | 22 | 55 | 60 | | 934 | 420 | |

S

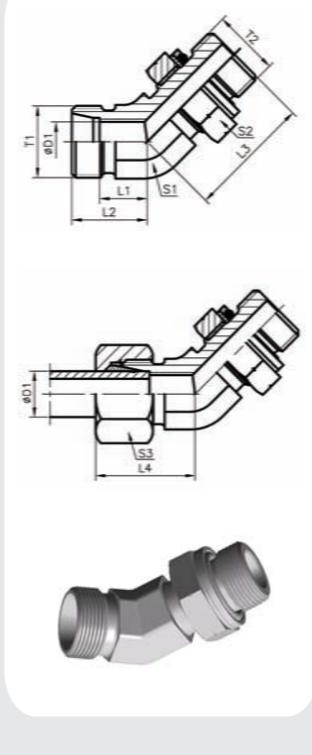S1CG4-OG、S1DG4-OG
S1CG4-OG/RN、S1DG4-OG/RN45° 弯英管螺纹可调向O型圈密封柱端
45° ELBOW BSP THREAD ADJUSTABLE STUD ENDS WITH O-RING SEALING


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (Bar) | 系列 |
|----------------|-----------|------------|------|---------------|------|----|----|----|----|-----------|---------------|-----|
| | T1 | T2 | | L1 | L2 | L3 | L4 | S1 | S2 | S3 | | |
| S1CG4-12-02OG | M12X1.5 | G1/8"X28 | 06 | 9 | 16 | 28 | 24 | 14 | 14 | 14 | 30 | 315 |
| S1CG4-14-04OG | M14X1.5 | G1/4"X19 | 08 | 12 | 19 | 29 | 27 | 14 | 19 | 17 | 50 | 315 |
| S1CG4-16-06OG | M16X1.5 | G3/8"X19 | 10 | 15 | 22 | 30 | 30 | 16 | 22 | 22 | 81 | 315 |
| S1CG4-18-06OG | M18X1.5 | G3/8"X19 | 12 | 14 | 21 | 37 | 28 | 19 | 22 | 22 | 85 | 250 |
| S1CG4-22-08OG | M22X1.5 | G1/2"X14 | 15 | 17 | 24 | 39 | 32 | 22 | 27 | 27 | 150 | 250 |
| S1CG4-26-08OG | M26X1.5 | G1/2"X14 | 18 | 17 | 24.5 | 45 | 33 | 27 | 27 | 32 | 180 | 250 |
| S1CG4-30-12OG | M30X2 | G3/4"X14 | 22 | 19 | 26.5 | 50 | 35 | 30 | 36 | 36 | 276 | 160 |
| S1CG4-36-16OG | M36X2 | G1"X11 | 28 | 23 | 30.5 | 52 | 40 | 36 | 41 | 41 | 453 | 160 |
| S1CG4-45-20OG | M45X2 | G1.1/4"X11 | 35 | 27 | 37.5 | 54 | 48 | 50 | 50 | 50 | 680 | 160 |
| S1CG4-52-24OG | M52X2 | G1.1/2"X11 | 42 | 26 | 37 | 54 | 49 | 50 | 55 | 60 | 888 | 160 |
| S1DG4-14-04OG | M14X1.5 | G1/4"X19 | 06 | 9 | 16 | 28 | 24 | 14 | 19 | 17 | 57 | 315 |
| S1DG4-16-04OG | M16X1.5 | G1/4"X19 | 08 | 12 | 19 | 32 | 27 | 19 | 19 | 19 | 67 | 315 |
| S1DG4-18-06OG | M18X1.5 | G3/8"X19 | 10 | 13 | 20.5 | 34 | 29 | 19 | 22 | 22 | 92 | 250 |
| S1DG4-20-06OG | M20X1.5 | G3/8"X19 | 12 | 17 | 24.5 | 34 | 33 | 19 | 22 | 24 | 100 | 250 |
| S1DG4-22-08OG | M22X1.5 | G1/2"X14 | 14 | 22 | 30 | 40 | 36 | 22 | 27 | 27 | 153 | 250 |
| S1DG4-24-08OG | M24X1.5 | G1/2"X14 | 16 | 16 | 24.5 | 44 | 34 | 27 | 27 | 30 | 163 | 250 |
| S1DG4-30-12OG | M30X2 | G3/4"X14 | 20 | 16 | 26.5 | 46 | 38 | 27 | 36 | 36 | 284 | 250 |
| S1DG4-36-16OG | M36X2 | G1"X11 | 25 | 19 | 31 | 51 | 43 | 36 | 41 | 46 | 475 | 250 |
| S1DG4-42-20OG | M42X2 | G1.1/4"X11 | 30 | 24 | 37.5 | 53 | 50 | 50 | 50 | 50 | 577 | 160 |

注:如需带卡套及卡套螺母整套订货, 则请在代号后加“RN”, 如 S1DG4-20-06OG/RN
需配挡圈请在代号后加“DQ”, 如 S1DG4-20-06OGDQ
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix “RN” after our part NO, for example S1DG4-20-06OG/RN with retainer ring please insert suffix “DQ” after our part NO, for example S1DG4-20-06OGDQ

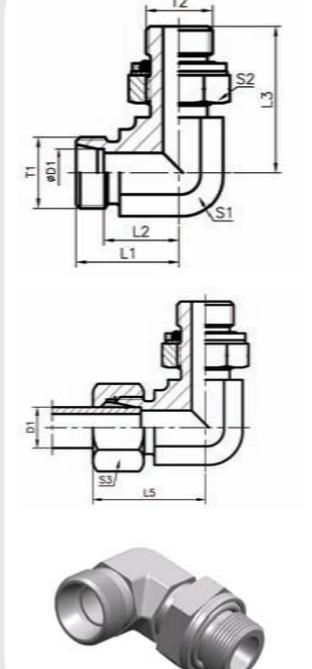S1CG9-OG、S1DG9-OG
S1CG9-OG/RN、S1DG9-OG/RN90° 弯英管螺纹可调向O型圈密封柱端
90° ELBOW BSP THREAD ADJUSTABLE STUD ENDS WITH O-RING SEALING

||
||
||

**S1CH4-0G、S1DH4-0G
S1CH4-0G/RN、S1DH4-0G/RN**

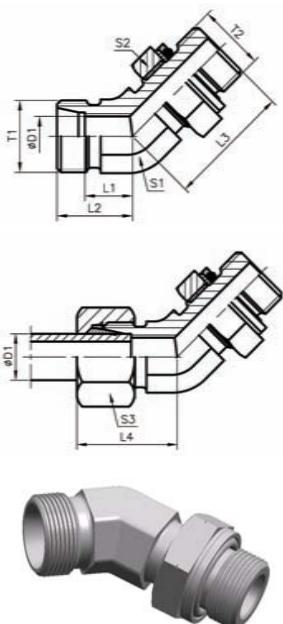


45° 弯公制外螺纹可调向柱端ISO 6149
45° ELBOW MALE ADJUSTABLE STUD END ISO 6149

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (Bar) | 系列 | |
|----------------|-----------|---------|------|---------------|------|----|----|----|----|-----------|---------------|-----|---|
| | T1 | T2 | | D1 | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CH4-12-100G | M12X1.5 | M10X1 | 06 | 9 | 16 | 28 | 24 | 14 | 14 | 14 | 30 | 315 | L |
| S1CH4-14-120G | M14X1.5 | M12X1.5 | 08 | 12 | 19 | 29 | 27 | 14 | 17 | 17 | 49 | 315 | |
| S1CH4-16-140G | M16X1.5 | M14X1.5 | 10 | 12 | 19 | 33 | 27 | 19 | 19 | 19 | 59 | 315 | |
| S1CH4-18-160G | M18X1.5 | M16X1.5 | 12 | 14 | 21 | 34 | 28 | 19 | 22 | 22 | 85 | 250 | |
| S1CH4-22-180G | M22X1.5 | M18X1.5 | 15 | 17 | 24 | 35 | 32 | 22 | 24 | 27 | 121 | 250 | |
| S1CH4-26-220G | M26X1.5 | M22X1.5 | 18 | 17 | 24.5 | 42 | 33 | 27 | 27 | 32 | 167 | 250 | |
| S1CH4-30-270G | M30X2 | M27X2 | 22 | 19 | 26.5 | 45 | 35 | 30 | 32 | 36 | 263 | 160 | |
| S1CH4-36-330G | M36X2 | M33X2 | 28 | 23 | 30.5 | 51 | 40 | 36 | 41 | 41 | 410 | 160 | |
| S1CH4-45-420G | M45X2 | M42X2 | 35 | 27 | 37.5 | 53 | 48 | 50 | 50 | 50 | 686 | 160 | |
| S1DH4-14-120G | M14X1.5 | M12X1.5 | 06 | 9 | 16 | 29 | 24 | 14 | 17 | 17 | 46 | 315 | |
| S1DH4-16-140G | M16X1.5 | M14X1.5 | 08 | 12 | 19 | 29 | 27 | 19 | 19 | 19 | 59 | 315 | |
| S1DH4-18-160G | M18X1.5 | M16X1.5 | 10 | 13 | 20.5 | 34 | 29 | 19 | 22 | 22 | 85 | 250 | |
| S1DH4-20-180G | M20X1.5 | M18X1.5 | 12 | 17 | 24.5 | 37 | 33 | 19 | 24 | 24 | 117 | 250 | |
| S1DH4-24-220G | M24X1.5 | M22X1.5 | 16 | 16 | 24.5 | 44 | 34 | 19 | 27 | 30 | 185 | 250 | |
| S1DH4-30-270G | M30X2 | M27X2 | 20 | 16 | 26.5 | 51 | 38 | 27 | 32 | 36 | 165 | 250 | |
| S1DH4-36-330G | M36X2 | M33X2 | 25 | 19 | 31 | 53 | 43 | 36 | 41 | 46 | 410 | 250 | |
| S1DH4-420G | M42X2 | M42X2 | 30 | 24 | 37.5 | 54 | 50 | 50 | 50 | 50 | 672 | 160 | |

注:如需带卡套及卡套螺母整套订货, 则请在代号后加“RN”, 如 S1DH4-24-220G/RN
需配挡圈请在代号后加“DQ”, 如 S1DH4-24-220GDQ
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix “RN” after our part NO, for example S1DH4-24-220G/RN with retainer ring please insert suffix “DQ” after our part NO, for example S1DH4-24-220GDQ

**S1CH9-0G、S1DH9-0G
S1CH9-0G/RN、S1DH9-0G/RN**

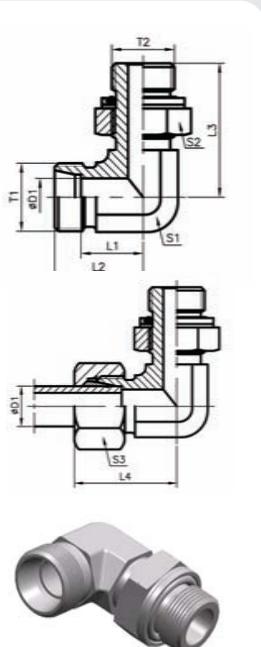



90° 弯公制外螺纹可调向柱端ISO 6149
90° ELBOW MALE ADJUSTABLE STUD END ISO 6149

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (Bar) | 系列 | |
|----------------|-----------|---------|------|---------------|------|----|----|----|----|-----------|---------------|-----|---|
| | T1 | T2 | | D1 | L1 | L2 | L3 | L4 | S1 | S2 | | | |
| S1CH9-12-100G | M12X1.5 | M10X1 | 06 | 14 | 21 | 27 | 29 | 14 | 14 | 14 | 33 | 315 | L |
| S1CH9-14-120G | M14X1.5 | M12X1.5 | 08 | 16 | 23 | 32 | 31 | 14 | 17 | 17 | 52 | 315 | |
| S1CH9-16-140G | M16X1.5 | M14X1.5 | 10 | 17 | 24 | 34 | 32 | 19 | 19 | 19 | 66 | 315 | |
| S1CH9-18-160G | M18X1.5 | M16X1.5 | 12 | 19 | 26 | 35 | 34 | 19 | 22 | 22 | 91 | 250 | |
| S1CH9-22-180G | M22X1.5 | M18X1.5 | 15 | 21 | 28 | 42 | 36 | 22 | 24 | 27 | 132 | 250 | |
| S1CH9-26-220G | M26X1.5 | M22X1.5 | 18 | 24 | 31.5 | 45 | 40 | 27 | 27 | 32 | 197 | 250 | |
| S1CH9-30-270G | M30X2 | M27X2 | 22 | 28 | 35.5 | 50 | 44 | 30 | 32 | 36 | 302 | 160 | |
| S1CH9-36-330G | M36X2 | M33X2 | 28 | 31 | 38.5 | 53 | 47 | 36 | 41 | 41 | 466 | 160 | |
| S1DH9-14-120G | M14X1.5 | M12X1.5 | 06 | 15 | 22 | 32 | 30 | 14 | 17 | 17 | 54 | 315 | |
| S1DH9-16-140G | M16X1.5 | M14X1.5 | 08 | 17 | 24 | 36 | 32 | 19 | 19 | 19 | 68 | 315 | |
| S1DH9-18-160G | M18X1.5 | M16X1.5 | 10 | 18 | 25.5 | 38 | 34 | 19 | 22 | 22 | 93 | 250 | |
| S1DH9-20-180G | M20X1.5 | M18X1.5 | 12 | 22 | 29.5 | 43 | 38 | 22 | 24 | 24 | 126 | 250 | |
| S1DH9-22-200G | M22X1.5 | M20X1.5 | 14 | 22 | 30 | 40 | 40 | 22 | 27 | 27 | 161 | 250 | |
| S1DH9-24-220G | M24X1.5 | M22X1.5 | 16 | 25 | 33.5 | 50 | 43 | 27 | 27 | 30 | 183 | 250 | |
| S1DH9-30-270G | M30X2 | M27X2 | 20 | 28 | 38.5 | 54 | 49 | 30 | 32 | 36 | 309 | 250 | |
| S1DH9-36-330G | M36X2 | M33X2 | 25 | 30 | 42 | 60 | 54 | 36 | 41 | 46 | 487 | 250 | |
| S1DH9-420G | M42X2 | M42X2 | 30 | 36 | 49.5 | 68 | 62 | 50 | 50 | 50 | 773 | 160 | |

注:如需带卡套及卡套螺母整套订货, 则请在代号后加“RN”, 如 S1DH9-24-220G/RN
需配挡圈请在代号后加“DQ”, 如 S1DH9-24-220GDQ
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix “RN” after our part NO, for example S1DH9-24-220G/RN with retainer ring please insert suffix “DQ” after our part NO, for example S1DH9-24-220GDQ



S1C09-OG、S1D09-OG

S1C09-OG/RN、S1D09-OG/RN

90° 弯美制螺纹可调向O型圈密封柱端ISO 11926
90° ELBOW UN、UNF THREAD ADJUSTABLE STUD ENDS WITH O-RING SEALING ISO 11926

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (Bar) | 系列 |
|----------------|-----------|------------|------------|---------------|------|------|------|----|----|-----------|---------------|-----|
| | T1 | T2 | | L1 | L2 | L3 | L4 | S1 | S2 | S3 | | |
| S1C09-12-040G | M12X1.5 | 7/16"X20 | 06 | 14 | 21 | 29 | 29 | 14 | 14 | 14 | 42 | 315 |
| S1C09-14-060G | M14X1.5 | 9/16"X18 | 08 | 15.5 | 22.5 | 31.8 | 30.5 | 14 | 19 | 17 | 60 | 315 |
| S1C09-16-060G | M16X1.5 | 9/16"X18 | 10 | 17 | 24 | 34 | 32 | 19 | 17 | 19 | 70 | 315 |
| S1C09-18-080G | M18X1.5 | 3/4"X16 | 12 | 19 | 26 | 38 | 34 | 19 | 22 | 22 | 118 | 250 |
| S1C09-22-100G | M22X1.5 | 7/8"X14 | 15 | 21 | 28 | 43 | 36 | 22 | 27 | 27 | 168 | 250 |
| S1C09-22-080G | M22X1.5 | 3/4"X16 | 15 | 21 | 28 | 41 | 36 | 22 | 22 | 27 | 144 | 250 |
| S1C09-26-120G | M26X1.5 | 1.1/16"X12 | 18 | 24 | 31.5 | 49 | 40 | 30 | 32 | 32 | 265 | 250 |
| S1C09-30-120G | M30X2 | 1.1/16"X12 | 22 | 28 | 35.5 | 52 | 44 | 30 | 32 | 36 | 313 | 160 |
| S1C09-36-120G | M36X2 | 1.1/16"X12 | 28 | 33.5 | 41 | 57.5 | 47.8 | 36 | 41 | 41 | 410 | 160 |
| S1C09-36-160G | M36X2 | 1.5/16"X12 | 28 | 31 | 38.5 | 59 | 47 | 36 | 41 | 41 | 500 | 160 |
| S1C09-45-200G | M45X2 | 1.5/8"X12 | 35 | 38 | 48.5 | 63 | 59 | 50 | 50 | 50 | 585 | 160 |
| S1C09-52-240G | M52X2 | 1.7/8"X12 | 42 | 38 | 49 | 64 | 61 | 50 | 55 | 60 | 582 | 160 |
| S1D09-14-040G | M14X1.5 | 7/16"X20 | 06 | 15 | 22 | 32 | 30 | 14 | 14 | 17 | 199 | 315 |
| S1D09-16-060G | M16X1.5 | 9/16"X18 | 08 | 17 | 24 | 37 | 32 | 19 | 17 | 19 | 226 | 315 |
| S1D09-18-060G | M18X1.5 | 9/16"X18 | 10 | 18 | 25.5 | 38 | 34 | 19 | 17 | 22 | 236 | 250 |
| S1D09-18-080G | M18X1.5 | 3/4"X16 | 10 | 19.5 | 27 | 37.5 | 36 | 19 | 24 | 22 | 281 | 250 |
| S1D09-20-080G | M20X1.5 | 3/4"X16 | 12 | 22 | 29.5 | 44 | 38 | 22 | 22 | 24 | 311 | 250 |
| S1D09-22-100G | M22X1.5 | 7/8"X14 | 14 | 23 | 30.5 | 44 | 41 | 22 | 27 | 27 | 328 | 250 |
| S1D09-24-100G | M24X1.5 | 7/8"X14 | 16 | 25 | 33.5 | 50 | 43 | 27 | 27 | 30 | 348 | 250 |
| S1D09-30-120G | M30X2 | 1.1/16"X12 | 20 | 28 | 38.5 | 56 | 49 | 30 | 32 | 36 | 430 | 250 |
| S1D09-36-160G | M36X2 | 1.5/16"X12 | 25 | 30 | 42 | 57.5 | 54 | 36 | 41 | 46 | 510 | 250 |
| S1D09-42-200G | M42X2 | 1.5/8"X12 | 30 | 36 | 49.5 | 69 | 62 | 50 | 50 | 50 | 695 | 160 |
| S1D09-52-240G | M52X2 | 1.7/8"X12 | 38 | 34 | 50 | 70 | 65 | 50 | 55 | 60 | 629 | 160 |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1C09-30-120G/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO, for example S1C09-30-120G/RN.

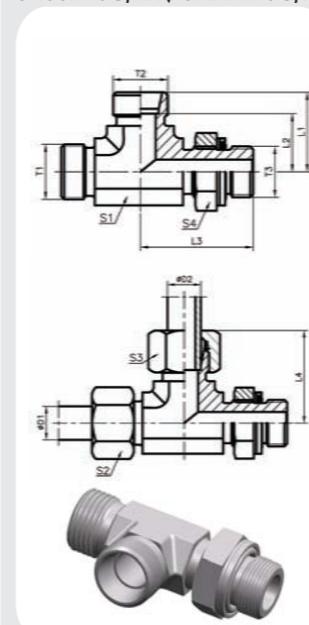SACCH-OG、SADDH-OG
SACCH-OG/RN、SADDH-OG/RN公制外螺纹可调向柱端ISO 6149 主支三通
METRIC MALE ADJUSTABLE STUD END ISO 6149 RUN TEE


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1 | D2 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|------------------|-----------|---------|------------|----|---------------|----|----|----|----|-------|-----------|---------------|-----|
| | T1/T2 | T3 | | | L1 | L2 | L3 | L4 | S1 | S2/S3 | S4 | | |
| SACCH-12-12-100G | M12X1.5 | M10X1 | 06 | 06 | 21 | 14 | 27 | 29 | 14 | 14 | 14 | 45 | 315 |
| SACCH-14-14-120G | M14X1.5 | M12X1.5 | 08 | 08 | 23 | 16 | 32 | 31 | 14 | 17 | 17 | 68 | 315 |
| SACCH-16-16-140G | M16X1.5 | M14X1.5 | 10 | 10 | 24 | 17 | 34 | 32 | 19 | 19 | 19 | 89 | 315 |
| SACCH-18-18-160G | M18X1.5 | M16X1.5 | 12 | 12 | 26 | 19 | 35 | 34 | 19 | 22 | 22 | 121 | 250 |
| SACCH-22-22-180G | M22X1.5 | M18X1.5 | 15 | 15 | 28 | 21 | 41 | 36 | 22 | 27 | 24 | 177 | 250 |
| SACCH-26-26-220G | M26X1.5 | M22X1.5 | 18 | 18 | 31.5 | 24 | 44 | 40 | 27 | 32 | 27 | 263 | 250 |
| SACCH-30-30-270G | M30X2 | M27X2 | 22 | 22 | 35.5 | 28 | 49 | 44 | 30 | 36 | 32 | 396 | 160 |
| SACCH-36-36-330G | M36X2 | M33X2 | 28 | 28 | 38.5 | 31 | 52 | 47 | 36 | 41 | 41 | 621 | 160 |
| SADDH-14-14-120G | M14X1.5 | M12X1.5 | 06 | 06 | 22 | 15 | 32 | 30 | 14 | 17 | 17 | 71 | 400 |
| SADDH-16-16-140G | M16X1.5 | M14X1.5 | 08 | 08 | 24 | 17 | 36 | 32 | 19 | 19 | 19 | 91 | 400 |
| SADDH-18-18-160G | M18X1.5 | M16X1.5 | 10 | 10 | 25.5 | 18 | 38 | 34 | 19 | 22 | 22 | 124 | 400 |
| SADDH-20-20-180G | M20X1.5 | M18X1.5 | 12 | 12 | 28.5 | 21 | 43 | 38 | 22 | 24 | 24 | 160 | 400 |
| SADDH-24-24-220G | M24X1.5 | M22X1.5 | 16 | 16 | 33.5 | 25 | 49 | 43 | 27 | 30 | 27 | 213 | 400 |
| SADDH-30-30-270G | M30X2 | M27X2 | 20 | 20 | 38.5 | 28 | 55 | 49 | 30 | 36 | 32 | 409 | 400 |
| SADDH-36-36-330G | M36X2 | M33X2 | 25 | 25 | 42 | 30 | 60 | 54 | 36 | 46 | 41 | 657 | 350 |
| SADDH-420G | M42X2 | M42X2 | 30 | 30 | 49.5 | 36 | 68 | 62 | 46 | 50 | 50 | 1006 | 250 |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如SADDH-18-18-160G/RN。
需配挡圈请在代号后加“DQ”，如SADDH-18-18-160GDQ
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO, for example SADDH-18-18-160G/RN with retainer ring please insert suffix "DQ" after our part NO, for example SADDH-18-18-160GDQ

SACCG-OG、SADDG-OG
SACCG-OG/RN、SADDG-OG/RN

英管螺纹可调向O型圈密封柱端主支三通

BSP THREAD ADJUSTABLE STUD END WITH O-RING SEALING RUN TEE

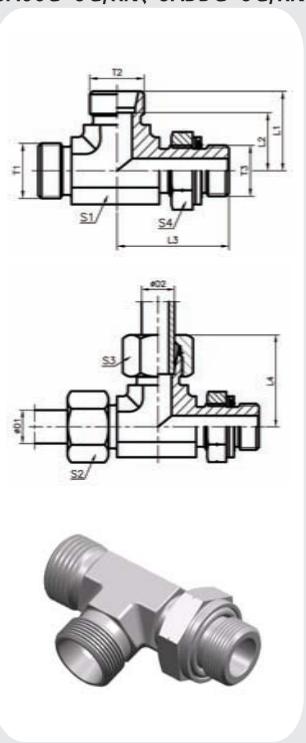


| 代号 PART NO. | 螺纹 THREAD T1/T2 | T3 | 尺寸 DIMENSIONS | | | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 | |
|------------------|--------------------|------------|---------------|----|------|----|----|----|----|-------|-----------|---------------|-----|---|
| | | | D1 | D2 | L1 | L2 | L3 | L4 | S1 | S2/S3 | S4 | | | |
| SACCG-12-12-020G | M12X1.5 | G1/8"X28 | 06 | 06 | 21 | 14 | 26 | 29 | 14 | 14 | 14 | 44 | 200 | |
| SACCG-14-14-040G | M14X1.5 | G1/4"X19 | 08 | 08 | 23 | 16 | 32 | 31 | 14 | 17 | 19 | 68 | 200 | |
| SACCG-16-16-040G | M16X1.5 | G1/4"X19 | 10 | 10 | 24 | 17 | 34 | 32 | 19 | 19 | 19 | 85 | 200 | |
| SACCG-18-18-060G | M18X1.5 | G3/8"X19 | 12 | 12 | 26 | 19 | 37 | 34 | 19 | 22 | 22 | 125 | 200 | L |
| SACCG-22-22-080G | M22X1.5 | G1/2"X14 | 15 | 15 | 28 | 21 | 43 | 36 | 22 | 27 | 27 | 205 | 200 | |
| SACCG-26-26-080G | M26X1.5 | G1/2"X14 | 18 | 18 | 31.5 | 24 | 49 | 40 | 27 | 32 | 27 | 266 | 200 | |
| SACCG-30-30-120G | M30X2 | G3/4"X14 | 22 | 22 | 35.5 | 28 | 49 | 44 | 30 | 36 | 32 | 400 | 200 | |
| SACCG-36-36-160G | M36X2 | G1"X11 | 28 | 28 | 38.5 | 31 | 59 | 47 | 36 | 41 | 41 | 637 | 200 | |
| SADDG-45-45-200G | M45X2 | G1.1/4"X11 | 35 | 35 | 48.5 | 38 | 65 | 59 | 50 | 50 | 50 | 995 | 160 | |
| SADDG-14-14-040G | M14X1.5 | G1/4"X19 | 06 | 06 | 22 | 15 | 32 | 30 | 14 | 17 | 19 | 72 | 315 | |
| SADDG-16-16-040G | M16X1.5 | G1/4"X19 | 08 | 08 | 24 | 17 | 36 | 32 | 19 | 19 | 19 | 87 | 315 | |
| SADDG-18-18-060G | M18X1.5 | G3/8"X19 | 10 | 10 | 25.5 | 18 | 38 | 34 | 19 | 22 | 22 | 127 | 315 | |
| SADDG-20-20-060G | M20X1.5 | G3/8"X19 | 12 | 12 | 28.5 | 21 | 38 | 38 | 22 | 24 | 22 | 145 | 315 | |
| SADDG-22-22-080G | M22X1.5 | G1/2"X14 | 14 | 14 | 31 | 23 | 43 | 41 | 22 | 27 | 27 | 213 | 250 | |
| SADDG-24-24-080G | M24X1.5 | G1/2"X14 | 16 | 16 | 33.5 | 25 | 49 | 43 | 27 | 30 | 27 | 234 | 250 | |
| SADDG-30-30-120G | M30X2 | G3/4"X14 | 20 | 20 | 38.5 | 28 | 51 | 49 | 30 | 36 | 36 | 413 | 250 | |
| SADDG-36-36-160G | M36X2 | G1"X11 | 25 | 25 | 42 | 30 | 58 | 54 | 36 | 46 | 41 | 673 | 250 | |
| SADDG-42-42-200G | M42X2 | G1.1/4"X11 | 30 | 30 | 49.5 | 36 | 64 | 62 | 46 | 50 | 50 | 1013 | 160 | |

注:如需带卡套及卡套螺母整套订货, 则请在代号后加“RN”, 如SADDG-18-18-060G/RN
需配挡圈请在代号后加“DQ”, 如SADDG-18-18-060GDQ
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix “RN” after our part NO, for example SADDG-18-18-060G/RN with retainer ring please insert suffix “DQ” after our part NO, for example SADDG-18-18-060GDQ

SACCO-OG、SADDO-OG
SACCO-OG/RN、SADDO-OG/RN

美制螺纹可调向O型圈密封柱端主支三通

UN、UNF THREAD ADJUSTABLE STUD ENDS WITH O-RING SEALING RUN TEE

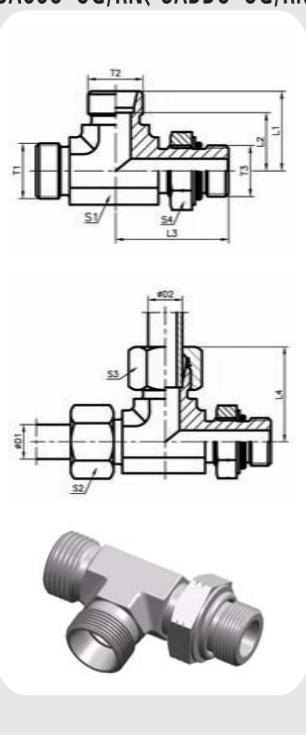


| 代号 PART NO. | 螺纹 THREAD T1/T2 | T3 | 尺寸 DIMENSIONS | | | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 | |
|------------------|--------------------|------------|---------------|----|------|------|------|------|----|-------|-----------|---------------|-----|--|
| | | | D1 | D2 | L1 | L2 | L3 | L4 | S1 | S2/S3 | S4 | | | |
| SACCO-12-12-040G | M12X1.5 | 7/16"X20 | 06 | 06 | 21 | 14 | 29 | 29 | 14 | 14 | 14 | 53 | 315 | |
| SACCO-14-14-060G | M14X1.5 | 9/16"X18 | 08 | 08 | 22.5 | 15.5 | 31.8 | 30.5 | 14 | 17 | 17 | 72 | 250 | |
| SACCO-16-16-060G | M16X1.5 | 9/16"X18 | 10 | 10 | 24 | 17 | 34 | 32 | 19 | 19 | 17 | 90 | 250 | |
| SACCO-18-18-080G | M18X1.5 | 3/4"X16 | 12 | 12 | 26 | 19 | 38 | 34 | 19 | 22 | 22 | 142 | 250 | |
| SACCO-22-22-100G | M22X1.5 | 7/8"X14 | 15 | 15 | 28 | 21 | 43 | 36 | 22 | 27 | 27 | 212 | 200 | |
| SACCO-26-26-120G | M26X1.5 | 1.1/16"X12 | 18 | 18 | 31.5 | 24 | 49 | 40 | 30 | 32 | 32 | 333 | 200 | |
| SACCO-30-30-120G | M30X2 | 1.1/16"X12 | 22 | 22 | 35.5 | 28 | 53 | 44 | 30 | 36 | 32 | 410 | 200 | |
| SACCO-36-36-160G | M36X2 | 1.5/16"X12 | 28 | 28 | 38.5 | 31 | 59 | 47 | 36 | 41 | 41 | 642 | 160 | |
| SACCO-45-45-200G | M45X2 | 1.5/8"X12 | 35 | 35 | 48.5 | 38 | 63 | 59 | 46 | 50 | 50 | 1047 | 125 | |
| SADDO-14-14-040G | M14X1.5 | 7/16"X20 | 06 | 06 | 22 | 15 | 32 | 30 | 14 | 17 | 14 | 66 | 400 | |
| SADDO-16-16-060G | M16X1.5 | 9/16"X18 | 08 | 08 | 24 | 17 | 37 | 32 | 19 | 19 | 17 | 92 | 400 | |
| SADDO-18-18-060G | M18X1.5 | 9/16"X18 | 10 | 10 | 25.5 | 18 | 38 | 34 | 19 | 22 | 17 | 110 | 400 | |
| SADDO-20-20-080G | M20X1.5 | 3/4"X16 | 12 | 12 | 28.5 | 21 | 44 | 38 | 22 | 24 | 22 | 167 | 400 | |
| SADDO-22-22-100G | M22X1.5 | 7/8"X14 | 14 | 14 | 31 | 23 | 44 | 41 | 22 | 27 | 27 | 220 | 400 | |
| SADDO-24-24-100G | M24X1.5 | 7/8"X14 | 16 | 16 | 33.5 | 25 | 50 | 43 | 27 | 30 | 27 | 263 | 400 | |
| SADDO-30-30-120G | M30X2 | 1.1/16"X12 | 20 | 20 | 38.5 | 28 | 56 | 49 | 30 | 36 | 32 | 423 | 400 | |
| SADDO-36-36-160G | M36X2 | 1.5/16"X12 | 25 | 25 | 42 | 30 | 69 | 56.8 | 36 | 46 | 41 | 678 | 315 | |
| SADDO-42-42-200G | M42X2 | 1.5/8"X12 | 30 | 30 | 49.5 | 36 | 69 | 62 | 46 | 50 | 50 | 1007 | 250 | |

注: 如需带卡套及卡套螺母整套订货, 则请在代号后加“RN”, 如SACCO-30-30-120G/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix “RN” after our part NO., for example SACCO-30-30-120G/RN.

SACGC-OG、SADGD-OG
SACGC-OG/RN、SADGD-OG/RN

英管螺纹可调向O型圈密封柱端分支三通



BSP THREAD ADJUSTABLE STUD ENDS WITH O-RING SEALING BRANCH TEE

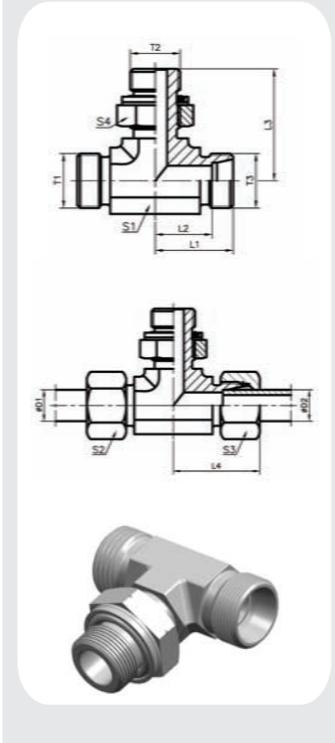

| 代号 PART NO. | 螺纹 THREAD T1/T3 | T2 | 尺寸 DIMENSIONS | | | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|--------------------|----|---------------|--|--|--|--|--|--|--|-----------|---------------|----|
|----------------|--------------------|----|---------------|--|--|--|--|--|--|--|-----------|---------------|----|

SACOC-OG、SADOD-OG

SACOC-OG/RN、SADOD-OG/RN

UN、UNF THREAD ADJUSTABLE STUD ENDS WITH O-RING SEALING BRANCH TEE
美制螺纹可调向O型圈密封柱端分支三通

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | | 重量 克/件 | 工作压力 bar | 系列 | |
|------------------|-----------|------------|------|----|---------------|------|------|------|----|-----------|-------------|------|-----|
| | T1/T3 | T2 | D1 | D2 | L1 | L2 | L3 | L4 | S1 | S2、S3 | S4 | | |
| SACOC-12-04-120G | M12X1.5 | 7/16"X20 | 06 | 06 | 21 | 14 | 29 | 29 | 14 | 14 | 14 | 53 | 315 |
| SACOC-14-06-140G | M14X1.5 | 9/16"X18 | 08 | 08 | 22.5 | 15.5 | 29 | 30.5 | 14 | 17 | 17 | 72 | 250 |
| SACOC-16-06-160G | M16X1.5 | 9/16"X18 | 10 | 10 | 24 | 17 | 34 | 32 | 19 | 19 | 17 | 90 | 250 |
| SACOC-18-08-180G | M18X1.5 | 3/4"X16 | 12 | 12 | 26 | 19 | 38 | 34 | 19 | 22 | 22 | 142 | 250 |
| SACOC-22-10-220G | M22X1.5 | 7/8"X14 | 15 | 15 | 28 | 21 | 41 | 36 | 22 | 27 | 27 | 212 | 200 |
| SACOC-26-12-260G | M26X1.5 | 1.1/16"X12 | 18 | 18 | 31.5 | 24 | 47 | 40 | 30 | 32 | 32 | 333 | 200 |
| SACOC-30-12-300G | M30X2 | 1.1/16"X12 | 22 | 22 | 35.5 | 28 | 52 | 44 | 30 | 36 | 32 | 410 | 200 |
| SACOC-36-16-360G | M36X2 | 1.5/16"X12 | 28 | 28 | 38.5 | 31 | 59 | 47 | 36 | 41 | 41 | 642 | 160 |
| SACOC-45-20-450G | M45X2 | 1.5/8"X12 | 35 | 35 | 48.5 | 38 | 63 | 59 | 46 | 50 | 50 | 1047 | 125 |
| SADOD-14-04-140G | M14X1.5 | 7/16"X20 | 06 | 06 | 22 | 15 | 32 | 30 | 14 | 17 | 14 | 66 | 400 |
| SADOD-16-06-160G | M16X1.5 | 9/16"X18 | 08 | 08 | 24 | 17 | 37 | 32 | 19 | 19 | 17 | 92 | 400 |
| SADOD-18-06-180G | M18X1.5 | 9/16"X18 | 10 | 10 | 25.5 | 18 | 38 | 34 | 19 | 22 | 17 | 110 | 400 |
| SADOD-20-08-200G | M20X1.5 | 3/4"X16 | 12 | 12 | 28.5 | 22 | 44 | 38 | 22 | 24 | 22 | 167 | 400 |
| SADOD-22-10-220G | M22X1.5 | 7/8"X14 | 14 | 14 | 31 | 23 | 44 | 41 | 22 | 27 | 27 | 220 | 400 |
| SADOD-24-10-240G | M24X1.5 | 7/8"X14 | 16 | 16 | 33.5 | 25 | 50 | 43 | 27 | 30 | 27 | 263 | 400 |
| SADOD-30-12-300G | M30X2 | 1.1/16"X12 | 20 | 20 | 38.5 | 28 | 56 | 49 | 30 | 36 | 32 | 423 | 400 |
| SADOD-36-16-360G | M36X2 | 1.5/16"X12 | 25 | 25 | 44.8 | 32.8 | 57.5 | 56.8 | 36 | 46 | 41 | 678 | 315 |
| SADOD-42-20-420G | M42X2 | 1.5/8"X12 | 30 | 30 | 49.5 | 36 | 69 | 62 | 46 | 50 | 50 | 1007 | 250 |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如SACOC-30-12-300G/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example SACOC-30-12-300G/RN.

S1CT9-SP、S1DT9-SP



S1CT9-SP/RN、S1DT9-SP/RN

90° 弯英锥管外螺纹

90 ELBOW BSPT MALE

S1CT9-SP、S1DT9-SP

S1CT9-SP/RN、S1DT9-SP/RN





A类

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | | 尺寸 DIMENSIONS | | | | | | | 重量 克/件 | 工作压力 bar | 系列 |
|----------------|-----------|----------|------|----|---------------|----|-----|----|----|----|-----|-----------|-------------|----|
| | T1 | T2 | D1 | L1 | L2 | L3 | L4 | L5 | S1 | S2 | | | | |
| S1CT9-12-02SP | M12X1.5 | R1/8"X28 | 06 | 19 | 12 | 20 | 9.5 | 27 | 12 | 14 | 30 | 315 | 315 | L |
| S1CT9-12-04SP | M12X1.5 | R1/4"X19 | 06 | 21 | 14 | 26 | 12 | 29 | 12 | 14 | 47 | 315 | 315 | L |
| S1CT9-14-04SP | M14X1.5 | R1/4"X19 | 08 | 21 | 14 | 26 | 14 | 29 | 14 | 17 | 46 | 315 | 315 | L |
| S1CT9-14-02SP | M14X1.5 | R1/8"X28 | 08 | 21 | 14 | 26 | 9.5 | 29 | 14 | 17 | 49 | 315 | 315 | L |
| S1CT9-14-06SP | M14X1.5 | R3/8"X19 | 08 | 24 | 17 | 28 | 14 | 32 | 19 | 17 | 94 | 315 | 315 | L |
| S1CT9-16-04SP | M16X1.5 | R1/4"X19 | 10 | 22 | 15 | 27 | 14 | 30 | 17 | 19 | 61 | 315 | 315 | L |
| S1CT9-16-06SP | M16X1.5 | R3/8"X19 | 10 | 24 | 17 | 28 | 14 | 32 | 19 | 19 | 87 | 315 | 315 | L |
| S1CT9-18-04SP | M18X1.5 | R1/4"X19 | 12 | 24 | 17 | 28 | 14 | 32 | 19 | 22 | 88 | 315 | 315 | L |
| S1CT9-18-08SP | M18X1.5 | R1/2"X14 | 12 | 28 | 21 | 34 | 14 | 36 | 19 | 22 | 89 | 315 | 315 | L |
| S1CT9-22-08SP | M22X1.5 | R1/2"X14 | 15 | 28 | 21 | 34 | 14 | 36 | 22 | 27 | 94 | 315 | 315 | S |
| S1CT9-26-08SP | M26X1.5 | R1/2"X14 | 18 | 31 | 23.5 | 36 | 17 | 40 | 27 | 32 | 141 | 315 | 315 | S |
| S1DT9-14-04SP | M14X1.5 | R1/4"X19 | 06 | 23 | 16 | 26 | 14 | 31 | 14 | 17 | 56 | 400 | 400 | S |
| S1DT9-14-06SP | M14X1.5 | R3/8"X19 | 06 | 25 | 18 | 20 | 12 | 33 | 19 | 17 | 61 | 400 | 400 | S |
| S1DT9-16-04SP | M16X1.5 | R1/4"X19 | 08 | 24 | 17 | 27 | 14 | 32 | 17 | 19 | 73 | 400 | 400 | S |
| S1DT9-16-06SP | M16X1.5 | R3/8"X19 | 08 | 25 | 18 | 28 | 12 | 33 | 19 | 19 | 63 | 400 | 400 | S |
| S1DT9-18-06SP | M18X1.5 | R3/8"X19 | 10 | 25 | 17.5 | 28 | 14 | 34 | 19 | 22 | 104 | 400 | 400 | S |
| S1DT9-18-04SP | M18X1.5 | R1/4"X19 | 10 | 25 | 17.5 | 28 | 14 | 34 | 19 | 22 | 59 | 400 | 400 | S |
| S1DT9-18-08SP | M18X1.5 | R1/2"X14 | 10 | 30 | 22.5 | 32 | 14 | 39 | 22 | 22 | 98 | 400 | 400 | S |
| S1DT9-20-06SP | M20X1.5 | R3/8"X19 | 12 | 29 | 21.5 | 28 | 14 | 38 | 19 | 24 | 126 | 400 | 400 | S |
| S1DT9-20-08SP | M20X1.5 | R1/2"X14 | 12 | 30 | 22.5 | 32 | 14 | 39 | 24 | 24 | 97 | 400 | 400 | S |
| S1DT9-22-08SP | M22X1.5 | R1/2"X14 | 14 | 30 | 22 | 32 | 14 | 40 | 22 | 27 | 101 | 400 | 400 | S |
| S1DT9-24-08SP | M24X1.5 | R1/2"X14 | 16 | 33 | 24.5 | 32 | 17 | 43 | 24 | 30 | 150 | 400 | 400 | S |


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1CT9-30-12SP/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO., for example S1CT9-30-12SP/RN.

**S1CN9、S1DN9
S1CN9/RN、S1DN9/RN**


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (Bar) | 系列 |
|----------------|-----------|----------------|------|---------------|------|----|------|----|----|-----------|---------------|-----|
| | T1 | T2 | | D1 | L1 | L2 | L3 | L4 | L5 | | | |
| S1CN9-12-02 | M12X1.5 | NPT1/8"X27 | 06 | 19 | 12 | 20 | 10 | 27 | 12 | 14 | 29 | 315 |
| S1CN9-12-04 | M12X1.5 | NPT1/4"X18 | 06 | 21 | 14 | 26 | 14.5 | 29 | 12 | 14 | 44 | 315 |
| S1CN9-12-06 | M12X1.5 | NPT3/8"X18 | 06 | 25 | 18 | 28 | 14.5 | 33 | 17 | 14 | 55 | 315 |
| S1CN9-14-02 | M14X1.5 | NPT1/8"X27 | 08 | 21 | 14 | 26 | 10 | 29 | 12 | 17 | 48 | 315 |
| S1CN9-14-04 | M14X1.5 | NPT1/4"X18 | 08 | 21 | 14 | 26 | 14.5 | 29 | 12 | 17 | 47 | 315 |
| S1CN9-16-04 | M16X1.5 | NPT1/4"X18 | 10 | 22 | 15 | 27 | 14.5 | 30 | 14 | 19 | 61 | 315 |
| S1CN9-16-06 | M16X1.5 | NPT3/8"X18 | 10 | 24 | 17 | 28 | 14.5 | 32 | 17 | 19 | 92 | 315 |
| S1CN9-18-04 | M18X1.5 | NPT1/4"X18 | 12 | 24 | 17 | 28 | 14.5 | 32 | 17 | 22 | 82 | 315 |
| S1CN9-18-06 | M18X1.5 | NPT3/8"X18 | 12 | 24 | 17 | 28 | 14.5 | 32 | 17 | 22 | 92 | 315 |
| S1CN9-18-08 | M18X1.5 | NPT1/2"X14 | 12 | 28 | 21 | 34 | 19.5 | 36 | 19 | 22 | 90 | 315 |
| S1CN9-22-08 | M22X1.5 | NPT1/2"X14 | 15 | 28 | 21 | 34 | 19.5 | 36 | 19 | 27 | 89 | 315 |
| S1CN9-26-08 | M26X1.5 | NPT1/2"X14 | 18 | 31 | 23.5 | 36 | 19.5 | 40 | 24 | 32 | 150 | 315 |
| S1CN9-30-12 | M30X2 | NPT3/4"X14 | 22 | 35 | 27.5 | 42 | 19.5 | 44 | 27 | 36 | 176 | 160 |
| S1CN9-36-16 | M36X2 | NPT1"X11.5 | 28 | 38 | 30.5 | 48 | 24.5 | 47 | 36 | 41 | 314 | 160 |
| S1CN9-45-20 | M45X2 | NPT1.1/4"X11.5 | 35 | 45 | 34.5 | 54 | 25 | 56 | 46 | 50 | 465 | 160 |
| S1CN9-52-24 | M52X2 | NPT1.1/2"X11.5 | 42 | 51 | 40 | 61 | 26 | 63 | 50 | 60 | 849 | 160 |
| S1DN9-14-04 | M14X1.5 | NPT1/4"X18 | 06 | 23 | 16 | 26 | 14.5 | 31 | 12 | 17 | 56 | 630 |
| S1DN9-16-04 | M16X1.5 | NPT1/4"X18 | 08 | 24 | 17 | 27 | 14.5 | 32 | 14 | 19 | 73 | 630 |
| S1DN9-16-06 | M16X1.5 | NPT3/8"X18 | 08 | 25 | 18 | 28 | 14.5 | 33 | 17 | 19 | 77 | 630 |
| S1DN9-16-08 | M16X1.5 | NPT1/2"X14 | 08 | 30 | 23 | 34 | 19.5 | 38 | 19 | 19 | 75 | 630 |
| S1DN9-18-04 | M18X1.5 | NPT1/4"X18 | 10 | 25 | 17.5 | 28 | 14.5 | 34 | 17 | 22 | 96 | 630 |
| S1DN9-18-06 | M18X1.5 | NPT3/8"X18 | 10 | 25 | 17.5 | 28 | 14.5 | 34 | 17 | 22 | 98 | 630 |
| S1DN9-20-06 | M20X1.5 | NPT3/8"X18 | 12 | 30 | 22.5 | 28 | 14.5 | 38 | 19 | 24 | 123 | 630 |
| S1DN9-20-08 | M20X1.5 | NPT1/2"X14 | 12 | 30 | 22.5 | 34 | 19.5 | 39 | 19 | 24 | 107 | 630 |
| S1DN9-22-08 | M22X1.5 | NPT1/2"X14 | 14 | 30 | 22 | 34 | 19.5 | 40 | 19 | 27 | 103 | 630 |
| S1DN9-24-08 | M24X1.5 | NPT1/2"X14 | 16 | 33 | 24.5 | 36 | 19.5 | 43 | 24 | 30 | 157 | 400 |
| S1DN9-30-12 | M30X2 | NPT3/4"X14 | 20 | 37 | 26.5 | 42 | 19.5 | 48 | 27 | 36 | 205 | 400 |
| S1DN9-36-16 | M36X2 | NPT1"X11.5 | 25 | 42 | 30 | 48 | 24.5 | 54 | 36 | 46 | 381 | 400 |
| S1DN9-42-20 | M42X2 | NPT1.1/4"X11.5 | 30 | 49 | 35.5 | 54 | 25 | 62 | 41 | 50 | 598 | 400 |
| S1DN9-52-24 | M52X2 | NPT1.1/2"X11.5 | 38 | 57 | 41 | 61 | 26 | 72 | 50 | 60 | 1029 | 315 |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1CN9-30-12/RN。
Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO, for example S1CN9-30-12/RN.

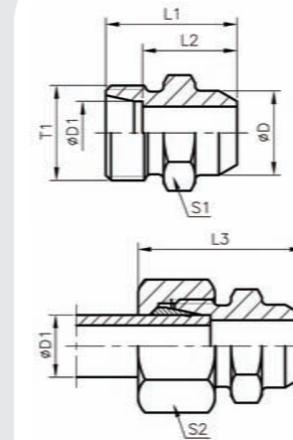**90° 弯布锥管外螺纹
90° ELBOW NPT MALE**
**S1CW、S1DW
S1CW/RN、S1DW/RN**

A类

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 | 尺寸 DIMENSIONS | | | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|--|------|---------------|----|----|------|----|----|-----------|---------------|-----|
| | T1 | | | D1 | D | L1 | L2 | L3 | S1 | | | |
| S1CW-12-06 | M12X1.5 | | | 6 | 10 | 21 | 14 | 29 | 12 | 14 | 11 | 315 |
| S1CW-14-08 | M14X1.5 | | | 8 | 12 | 23 | 16 | 31 | 14 | 17 | 15 | 315 |
| S1CW-16-10 | M16X1.5 | | | 10 | 14 | 25 | 18 | 33 | 17 | 19 | 22 | 315 |
| S1CW-18-12 | M18X1.5 | | | 12 | 16 | 25 | 18 | 33 | 19 | 22 | 25 | 315 |
| S1CW-22-15 | M22X1.5 | | | 15 | 19 | 29 | 22 | 37 | 22 | 27 | 44 | 315 |
| S1CW-26-18 | M26X1.5 | | | 18 | 22 | 31 | 23.5 | 40 | 27 | 32 | 67 | 315 |
| S1CW-30-22 | M30X2 | | | 22 | 27 | 36 | 28.5 | 45 | 32 | 36 | 98 | 160 |
| S1CW-36-28 | M36X2 | | | 28 | 32 | 38 | 30.5 | 47 | 41 | 41 | 165 | 160 |
| S1CW-45-35 | M45X2 | | | 35 | 40 | 43 | 32.5 | 54 | 46 | 50 | 232 | 160 |
| S1CW-52-42 | M52X2 | | | 42 | 46 | 46 | 35 | 58 | 55 | 60 | 342 | 160 |
| S1DW-14-06 | M14X1.5 | | | 6 | 11 | 26 | 19 | 34 | 14 | 17 | 21 | 630 |
| S1DW-16-08 | M16X1.5 | | | 8 | 13 | 28 | 21 | 36 | 17 | 19 | 31 | 630 |
| S1DW-18-10 | M18X1.5 | | | 10 | 15 | 30 | 22.5 | 39 | 19 | 22 | 41 | 630 |
| S1DW-20-12 | M20X1.5 | | | 12 | 17 | 32 | 24.5 | 41 | 22 | 24 | 93 | 630 |
| S1DW-22-14 | M22X1.5 | | | 14 | 19 | 35 | 27 | 45 | 24 | 27 | 55 | 630 |
| S1DW-24-16 | M24X1.5 | | | 16 | 21 | 35 | 26.5 | 45 | 27 | 30 | 82 | 400 |
| S1DW-30-20 | M30X2 | | | 20 | 26 | 40 | 29.5 | 51 | 32 | 36 | 131 | 400 |
| S1DW-36-25 | M36X2 | | | 25 | 31 | 44 | 32 | 56 | 41 | 46 | 219 | 400 |
| S1DW-42-30 | M42X2 | | | 30 | 36 | 49 | 35.5 | 62 | 46 | 50 | 297 | 400 |
| S1DW-52-38 | M52X2 | | | 38 | 44 | 54 | 38 | 69 | 55 | 60 | 448 | 315 |

注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1CW-30-22/RN。
Note: In case if you are

**S2WC
S2WD**

**焊接接头
WELD FITTINGS**

| 代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | | | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|---------------|------|----|----|-----------|---------------|-----|
| | | T1 | D1 | L1 | D2 | | | |
| S2WC-6X1.5 | M12X1.5 | 06 | 31.5 | 3 | 06 | 14 | 7 | 528 |
| S2WC-8X2.0 | M14X1.5 | 08 | 31.5 | 4 | 08 | 17 | 11 | 528 |
| S2WC-10X2.0 | M16X1.5 | 10 | 33.5 | 6 | 10 | 19 | 16 | 460 |
| S2WC-12X2.0 | M18X1.5 | 12 | 33.5 | 8 | 12 | 22 | 20 | 393 |
| S2WC-15X2.0 | M22X1.5 | 15 | 34.5 | 11 | 15 | 27 | 29 | 305 |
| S2WC-18X2.0 | M26X1.5 | 18 | 36.5 | 14 | 18 | 32 | 38 | 315 |
| S2WC-22X2.0 | M30X2 | 22 | 39.5 | 18 | 22 | 36 | 55 | 160 |
| S2WC-28X2.5 | M36X2 | 28 | 42.5 | 23 | 28 | 41 | 73 | 160 |
| S2WC-35X3.0 | M45X2 | 35 | 49.5 | 29 | 35 | 50 | 89 | 160 |
| S2WC-42X3.0 | M52X2 | 42 | 50 | 36 | 42 | 60 | 155 | 160 |
| S2WD-6X1.5 | M14X1.5 | 06 | 31.5 | 3 | 06 | 17 | 7 | 528 |
| S2WD-8X2.0 | M16X1.5 | 08 | 31.5 | 4 | 08 | 19 | 11 | 528 |
| S2WD-10X1.0 | M18X1.5 | 10 | 33.5 | 8 | 10 | 22 | 13 | 249 |
| S2WD-10X1.5 | M18X1.5 | 10 | 33.5 | 7 | 10 | 22 | 13 | 358 |
| S2WD-10X2.0 | M18X1.5 | 10 | 33.5 | 6 | 10 | 22 | 16 | 460 |
| S2WD-12X1.5 | M20X1.5 | 12 | 33.5 | 9 | 12 | 24 | 21 | 305 |
| S2WD-12X2.0 | M20X1.5 | 12 | 33.5 | 8 | 12 | 24 | 21 | 393 |
| S2WD-12X2.5 | M20X1.5 | 12 | 33.5 | 7 | 12 | 24 | 22 | 476 |
| S2WD-14X2.0 | M22X1.5 | 14 | 39.5 | 10 | 14 | 27 | 26 | 343 |
| S2WD-14X3.0 | M22X1.5 | 14 | 39.5 | 8 | 14 | 27 | 33 | 487 |
| S2WD-16X1.5 | M24X1.5 | 16 | 40.5 | 13 | 16 | 30 | 32 | 234 |
| S2WD-16X2.0 | M24X1.5 | 16 | 40.5 | 12 | 16 | 30 | 31 | 305 |
| S2WD-16X2.5 | M24X1.5 | 16 | 40.5 | 11 | 16 | 30 | 38 | 372 |
| S2WD-16X3.0 | M24X1.5 | 16 | 40.5 | 10 | 16 | 30 | 41 | 400 |
| S2WD-20X2.0 | M30X2 | 20 | 47 | 16 | 20 | 36 | 57 | 249 |
| S2WD-20X2.5 | M30X2 | 20 | 47 | 15 | 20 | 36 | 57 | 305 |
| S2WD-20X3.0 | M30X2 | 20 | 47 | 14 | 20 | 36 | 64 | 358 |
| S2WD-20X3.5 | M30X2 | 20 | 47 | 13 | 20 | 36 | 71 | 400 |
| S2WD-20X4.0 | M30X2 | 20 | 47 | 12 | 20 | 36 | 78 | 400 |
| S2WD-25X3.0 | M36X2 | 25 | 53 | 19 | 25 | 46 | 89 | 294 |
| S2WD-25X3.5 | M36X2 | 25 | 53 | 18 | 25 | 46 | 100 | 337 |
| S2WD-25X4.0 | M36X2 | 25 | 53 | 17 | 25 | 46 | 111 | 379 |
| S2WD-25X5.0 | M36X2 | 25 | 53 | 15 | 25 | 46 | 125 | 400 |
| S2WD-30X3.0 | M42X2 | 30 | 57 | 24 | 30 | 50 | 113 | 249 |
| S2WD-30X4.0 | M42X2 | 30 | 57 | 22 | 30 | 50 | 141 | 323 |
| S2WD-30X5.0 | M42X2 | 30 | 57 | 20 | 30 | 50 | 166 | 393 |
| S2WD-30X6.0 | M42X2 | 30 | 57 | 18 | 30 | 50 | 188 | 400 |
| S2WD-38X3.0 | M52X2 | 38 | 64 | 32 | 38 | 60 | 163 | 200 |
| S2WD-38X4.0 | M52X2 | 38 | 64 | 30 | 38 | 60 | 209 | 261 |
| S2WD-38X5.0 | M52X2 | 38 | 64 | 28 | 38 | 60 | 247 | 315 |
| S2WD-38X6.0 | M52X2 | 38 | 64 | 26 | 38 | 60 | 270 | 315 |
| S2WD-38X7.0 | M52X2 | 38 | 64 | 24 | 38 | 60 | 270 | 315 |

**S1CFL、S1DFL
S1CFL-ZH/RN, S1DFL-ZH/RN**

**DIN 卡套式/SAE法兰
METRIC MALE BITE TYPE/SAE FLANGE
3000 PSI 系列**

| 代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | | | 重量 克/件 | 工作压力 (bar) | 系列 | | | |
|----------------|-----------|---------------|------|----|------|-----------|---------------|----|----|------|-----|
| | | T1 | D1 | D | L1 | | | | L2 | L3 | L4 |
| S1CFL-22-08 | M22X1.5 | 15 | 30.2 | 48 | 41 | 6.7 | 56 | 24 | 27 | 360 | 315 |
| S1CFL-26-08 | M26X1.5 | 18 | 30.2 | 50 | 42.5 | 6.7 | 61 | 24 | 32 | 420 | 315 |
| S1CFL-26-12 | M26X1.5 | 18 | 38.1 | 53 | 45.5 | 6.7 | 62 | 30 | 32 | 590 | 315 |
| S1CFL-30-12 | M30X2 | 22 | 38.1 | 53 | 45.5 | 6.7 | 62 | 30 | 36 | 590 | 160 |
| S1CFL-36-12 | M36X2 | 28 | 38.1 | 55 | 45.5 | 6.7 | 64 | 32 | 41 | 600 | 160 |
| S1CFL-36-16 | M36X2 | 28 | 44.5 | 54 | 46.5 | 8 | 63 | 36 | 41 | 730 | 160 |
| S1CFL-45-20 | M45X2 | 35 | 50.8 | 58 | 47.5 | 8 | 69 | 41 | 50 | 1020 | 160 |
| S1CFL-45-24 | M45X2 | 35 | 60.3 | 65 | 54.5 | 8 | 76 | 46 | 50 | 1200 | 160 |
| S1CFL-52-24 | M52X2 | 42 | 60.3 | 64 | 53 | 8 | 76 | 46 | 60 | 1360 | 160 |
| S1DFL-24-08 | M24X1.5 | 16 | 30.2 | 50 | 41.5 | 6.7 | 60 | 24 | 30 | 400 | 350 |
| S1DFL-24-12 | M24X1.5 | 16 | 38.1 | 55 | 46.5 | 6.7 | 64.5 | 27 | 30 | 520 | 350 |
| S1DFL-30-12 | M30X2 | 20 | 38.1 | 57 | 46.5 | 6.7 | 68 | 30 | 36 | 650 | 350 |
| S1DFL-36-12 | M36X2 | 25 | 38.1 | 57 | 45 | 6.7 | 69 | 30 | 46 | 780 | 350 |
| S1DFL-36-16 | M36X2 | 25 | 44.5 | 60 | 48.5 | 8 | 71 | 32 | 36 | 700 | 350 |
| S1DFL-36-20 | M36X2 | 25 | 50.8 | 60 | 48 | 8 | 72 | 41 | 46 | 1170 | 200 |
| S1DFL-42-20 | M42X2 | 30 | 50.8 | 62 | 48.5 | 8 | 75 | 41 | 50 | 1200 | 200 |
| S1DFL-52-20 | M52X2 | 38 | 50.8 | 66 | 50 | 8 | 81 | 46 | 60 | 1410 | 200 |
| S1DFL-52-24 | M52X2 | 38 | 60.3 | 70 | 54 | 8 | 85 | 46 | 60 | 1630 | 200 |

注：如需配发兰夹和螺钉在代号后加“ZH”，如S1CFL-36-16ZH。
In case if you are interested to order adapter in complete set with Flange folder and Screw.
It is necessary to insert suffix “ZH” after our part NO,for example S1CFL-36-16ZH.


**S1DFS
S1DFS-ZH/RN**

**DIN 卡套式/SAE法兰
METRIC MALE BITE TYPE/SAE FLANGE
6000 PSI 系列**

| 代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | | | 螺栓 重量 克/件 | 工作压力 (bar) | 系列 | | | | |
|----------------|-----------|---------------|------|------|------|-----------------|---------------|----|----|--------|------|-----|
| | | T1 | D1 | D | L1 | | | | L2 | L3 | L4 | S1 |
| S1DFS-20-08 | M20X1.5 | 12 | 31.8 | 42.5 | 42.5 | 7.7 | 57.5 | 19 | 24 | M8X30 | 350 | 420 |
| S1DFS-22-08 | M22X1.5 | 14 | 31.8 | 50 | 42 | 7.7 | 59.5 | 19 | 27 | M8X30 | 390 | 420 |
| S1DFS-24-08 | M24X1.5 | 16 | 31.8 | 53 | 44.5 | 7.7 | 63 | 24 | 30 | M8X30 | 470 | 400 |
| S1DFS-24-12 | M24X1.5 | 16 | 41.3 | 59 | 50.5 | 8.7 | 69 | 30 | 30 | M10X35 | 790 | 400 |
| S1DFS-30-12 | M30X2 | 20 | 41.3 | 61 | 50.5 | 8.7 | 72 | 30 | 36 | M10X35 | 860 | 400 |
| S1DFS-36-12 | M36X2 | 25 | 41.3 | 63 | 51 | 8.7 | 75 | 30 | 46 | M10X35 | 970 | 400 |
| S1DFS-42-12 | M42X2 | 30 | 41.3 | 76 | 62 | 8.7 | 89 | 30 | 50 | M10X35 | 1150 | 420 |
| S1DFS-30-16 | M30X2 | 20 | 47.6 | 75 | 64.5 | 9.5 | 88 | 36 | 36 | M12X45 | 970 | 420 |
| S1DFS-36-16 | M36X2 | 25 | 47.6 | 72 | 60 | 9.5 | 84 | 36 | 46 | M12X45 | 1420 | 400 |
| S1DFS-42-16 | M42X2 | 30 | 47.6 | 74 | 60.5 | 9.5 | 87 | 36 | 50 | M12X45 | 1400 | 400 |
| S1DFS-52-16 | M52X2 | 38 | 47.6 | 84.5 | 68 | 9.5 | 99 | 46 | 60 | M12X45 | 1400 | 315 |
| S1DFS-36-20 | M36X2 | 25 | 54 | 80 | 68 | 10.2 | 92 | 41 | 46 | M14X50 | 1850 | 420 |
| S1DFS-42-20 | M42X2 | 30 | 54 | 79 | 65.5 | 10.2 | 92 | 41 | 50 | M14X50 | 1900 | 400 |
| S1DFS-52-20 | M52X2 | 38 | 54 | 83 | 67 | 10.2 | 98 | 46 | 60 | M | | |

S1CFL9、S1DFL9

S1CFL9-ZH/RN、S1DFL9-ZH/RN



90° DIN卡套式/SAE法兰
90° METRIC MALE BITE TYPE/SAE FLANGE
3000 PSI



| 代号 PART NO. | 螺纹 THREAD | 管子外径 | 尺寸 DIMENSIONS | | | | | | | | 螺栓 | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|------|---------------|----|------|-----|----|------|----|----|--------|-----------|---------------|----|
| | | | T1 | D1 | D | L1 | L2 | L3 | L4 | L5 | S1 | S2 | | |
| S1CFL9-22-08 | M22X1.5 | 15 | 30.2 | 36 | 29 | 6.7 | 36 | 44 | 24 | 27 | M8X25 | 400 | 315 | |
| S1CFL9-26-08 | M26X1.5 | 18 | 30.2 | 37 | 29.5 | 6.7 | 36 | 46 | 24 | 32 | M8X25 | 440 | 315 | |
| S1CFL9-26-12 | M26X1.5 | 18 | 38.1 | 39 | 31.5 | 6.7 | 42 | 48 | 30 | 32 | M10X30 | 660 | 315 | |
| S1CFL9-30-12 | M30X2 | 22 | 38.1 | 41 | 33.5 | 6.7 | 42 | 50 | 30 | 36 | M10X30 | 660 | 160 | |
| S1CFL9-36-12 | M36X2 | 28 | 38.1 | 41 | 33.5 | 6.7 | 42 | 50 | 30 | 41 | M10X30 | 780 | 160 | |
| S1CFL9-30-16 | M30X2 | 22 | 44.5 | 65 | 57.5 | 8 | 60 | 74 | 34 | 36 | M10X30 | 810 | 160 | |
| S1CFL9-36-16 | M36X2 | 28 | 44.5 | 44 | 36.5 | 8 | 45 | 53 | 36 | 41 | M10X30 | 850 | 160 | |
| S1CFL9-45-20 | M45X2 | 35 | 50.8 | 57 | 46.5 | 8 | 50 | 68 | 41 | 50 | M10X35 | 1150 | 160 | |
| S1CFL9-45-24 | M45X2 | 35 | 60.3 | 78 | 67.5 | 8 | 55 | 83 | 50 | 50 | M10X35 | 1550 | 160 | |
| S1CFL9-52-24 | M52X2 | 42 | 60.3 | 58 | 47 | 8 | 55 | 70 | 50 | 60 | M12X35 | 1600 | 160 | |
| S1DFL9-20-08 | M20X1.5 | 12 | 30.2 | 50 | 42.5 | 6.7 | 36 | 58.5 | 22 | 24 | M8X25 | 380 | 210 | |
| S1DFL9-24-08 | M24X1.5 | 16 | 30.2 | 38 | 29.5 | 6.7 | 36 | 48 | 24 | 30 | M8X25 | 430 | 350 | |
| S1DFL9-24-12 | M24X1.5 | 16 | 38.1 | 64 | 55.5 | 6.7 | 43 | 73.5 | 27 | 30 | M10X30 | 600 | 350 | |
| S1DFL9-30-12 | M30X2 | 20 | 38.1 | 43 | 32.5 | 6.7 | 42 | 54 | 30 | 36 | M10X30 | 760 | 350 | |
| S1DFL9-36-12 | M36X2 | 25 | 38.1 | 45 | 33 | 6.7 | 42 | 57 | 30 | 46 | M10X30 | 890 | 350 | |
| S1DFL9-30-16 | M30X2 | 20 | 44.5 | 65 | 54.5 | 8 | 45 | 77 | 36 | 36 | M10X30 | 780 | 350 | |
| S1DFL9-36-16 | M36X2 | 25 | 44.5 | 48 | 36.5 | 8 | 45 | 57 | 36 | 46 | M10X30 | 950 | 350 | |
| S1DFL9-42-16 | M42X2 | 30 | 44.5 | 50 | 36.5 | 8 | 45 | 63 | 36 | 50 | M10X30 | 1060 | 350 | |
| S1DFL9-36-20 | M36X2 | 25 | 50.8 | 55 | 43 | 8 | 50 | 67 | 41 | 46 | M10X35 | 1350 | 280 | |
| S1DFL9-42-20 | M42X2 | 30 | 50.8 | 57 | 43.5 | 8 | 50 | 71 | 41 | 50 | M10X35 | 1400 | 280 | |
| S1DFL9-52-20 | M52X2 | 38 | 50.8 | 59 | 43 | 8 | 50 | 74 | 41 | 60 | M10X35 | 1530 | 280 | |
| S1DFL9-52-24 | M52X2 | 38 | 60.3 | 64 | 48 | 8 | 55 | 79 | 50 | 60 | M10X35 | 1950 | 210 | |

注：如需配发兰夹和螺钉在代号后加“ZH”，如S1DFS9-36-16ZH。

Note: In case if you are interested to order adapter in complete set with Flange folder and Screw. It is necessary to insert suffix "ZH" after our part NO, for example S1DFS9-36-16ZH.

S1DFS9

S1DFS9-ZH/RN



90° 弯DIN卡套式/SAE法兰
90° METRIC MALE BITE TYPE/SAE FLANGE
6000 PSI



| 代号 PART NO. | 螺纹 THREAD | 管子外径 | 尺寸 DIMENSIONS | | | | | | | | 螺栓 | 重量 克/件 | 工作压力 (bar) | 系列 |
|----------------|-----------|------|---------------|----|------|------|----|------|----|----|--------|-----------|---------------|----|
| | | | T1 | D1 | D | L1 | L2 | L3 | L4 | L5 | S1 | S2 | | |
| S1DFS9-20-08 | M20X1.5 | 12 | 31.8 | 50 | 42.5 | 7.7 | 39 | 58.5 | 22 | 24 | M8X30 | 370 | 420 | |
| S1DFS9-22-08 | M22X1.5 | 14 | 31.8 | 50 | 42 | 7.7 | 39 | 59.5 | 22 | 27 | M8X30 | 390 | 420 | |
| S1DFS9-24-08 | M24X1.5 | 16 | 31.8 | 38 | 29.5 | 7.7 | 39 | 48 | 24 | 30 | M8X30 | 490 | 400 | |
| S1DFS9-24-12 | M24X1.5 | 16 | 41.3 | 45 | 36.5 | 8.7 | 48 | 55 | 32 | 30 | M10X35 | 920 | 400 | |
| S1DFS9-30-12 | M30X2 | 20 | 41.3 | 46 | 35.5 | 8.7 | 48 | 57 | 32 | 36 | M10X35 | 970 | 400 | |
| S1DFS9-36-12 | M36X2 | 25 | 41.3 | 48 | 36 | 8.7 | 48 | 60 | 32 | 46 | M10X35 | 1110 | 400 | |
| S1DFS9-30-16 | M30X2 | 20 | 47.6 | 65 | 54.5 | 9.5 | 60 | 75 | 41 | 36 | M12X45 | 1690 | 420 | |
| S1DFS9-36-16 | M36X2 | 25 | 47.6 | 53 | 44 | 9.5 | 60 | 65 | 41 | 46 | M12X45 | 1670 | 400 | |
| S1DFS9-42-16 | M42X2 | 30 | 47.6 | 55 | 41.5 | 9.5 | 60 | 68 | 41 | 50 | M12X45 | 1630 | 400 | |
| S1DFS9-36-20 | M36X2 | 25 | 54 | 64 | 52 | 10.2 | 68 | 76 | 42 | 46 | M14X50 | 2230 | 420 | |
| S1DFS9-42-20 | M42X2 | 30 | 54 | 58 | 44.5 | 10.2 | 68 | 71 | 46 | 50 | M14X50 | 2220 | 400 | |
| S1DFS9-52-20 | M52X2 | 38 | 54 | 61 | 45 | 10.2 | 68 | 76 | 46 | 60 | M14X50 | 2390 | 315 | |
| S1DFS9-42-24 | M42X2 | 30 | 63.5 | 76 | 63.5 | 12.5 | 76 | 90 | 50 | 50 | M16X55 | 2380 | 420 | |
| S1DFS9-52-24 | M52X2 | 38 | 63.5 | 72 | 56 | 12.5 | 76 | 87 | 50 | 60 | M16X55 | 2580 | 315 | |

注：如需配发兰夹和螺钉在代号后加“ZH”，如S1DFS9-36-16ZH。


Note: In case if you are interested to order adapter in complete set with Flange folder and Screw. It is necessary to insert suffix "ZH" after our part NO, for example S1DFS9-36-16ZH.

S1CFG/S1DFG

泵油口方形法兰接头
Pump flange connection



| 代号 PART NO. | 螺纹 THREAD | 管子外径 | 尺寸 DIMENSIONS | | | | | 螺栓 BOLT | O形圈 O-RING | 工作压力 Mpa |
|----------------|-----------|------|---------------|--|--|--|--|---------|------------|----------|
| | | | | | | | | | | |

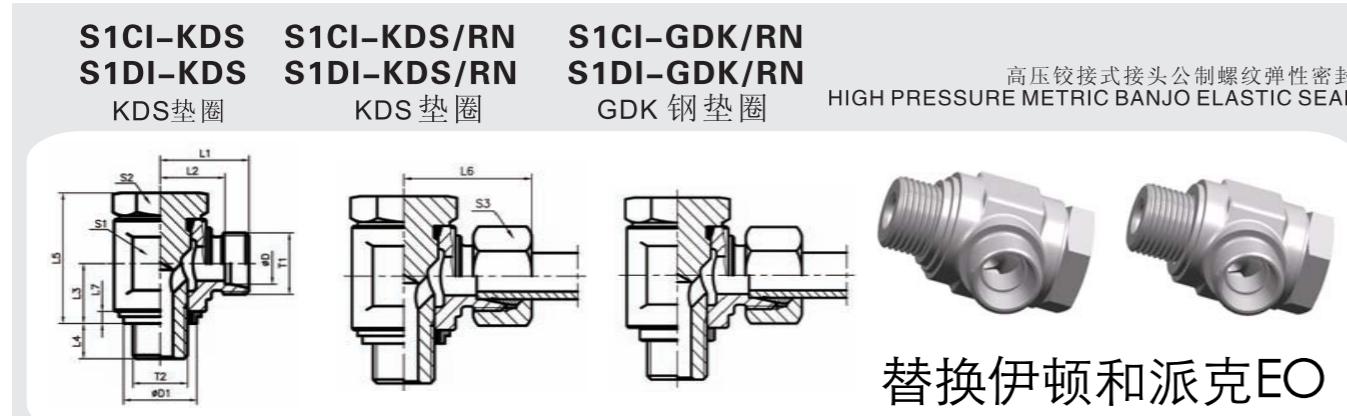

| 代号 PART NO. | 螺纹 THREAD | 管子外径 D TUDE O.D. | 尺寸 DIMENSIONS | | | | | | | | | | 工作压力 Mpa | | | |
|----------------|-----------|---------------------|---------------|------|------|------|----|------|----|-----|----|----|-------------|------|---------|---------|
| | | | T1 | T2 | L1 | L2 | L3 | L4 | L5 | L6 | L7 | S1 | S2 | S3 | D1(KDS) | D1(GDK) |
| S1CI-12-10KDS | M12X1.5 | M10X1 | 06 | 19 | 12 | 10.5 | 8 | 24 | 27 | 2.5 | 17 | 17 | 14 | 14.9 | 14 | 31.5 |
| S1CI-14-12KDS | M14X1.5 | M12X1.5 | 08 | 21.5 | 14.5 | 14 | 12 | 30 | 29 | 3.0 | 22 | 19 | 17 | 17 | 17 | 31.5 |
| S1CI-16-14KDS | M16X1.5 | M14X1.5 | 10 | 22.5 | 15.5 | 14 | 12 | 30 | 30 | 3.0 | 22 | 19 | 19 | 18.9 | 19 | 31.5 |
| S1CI-18-16KDS | M18X1.5 | M16X1.5 | 12 | 25 | 18.0 | 16.5 | 12 | 36 | 33 | 3.0 | 27 | 24 | 22 | 21.9 | 21 | 31.5 |
| S1CI-22-18KDS | M22X1.5 | M18X1.5 | 15 | 27.5 | 21.5 | 18.5 | 12 | 39.5 | 37 | 3.0 | 30 | 30 | 27 | 23.9 | 23 | 31.5 |
| S1CI-26-22KDS | M26X1.5 | M22X1.5 | 18 | 28.5 | 21 | 21.5 | 14 | 45 | 37 | 4.5 | 32 | 30 | 32 | 26.9 | 27 | 31.5 |
| S1CI-30-26KDS | M30X2 | M26X1.5 | 22 | 35 | 27.5 | 24 | 16 | 53 | 44 | 3.5 | 41 | 36 | 36 | 31.9 | 31 | 16 |
| S1CI-36-33KDS | M36X2 | M33X2 | 28 | 39.5 | 32 | 30.5 | 18 | 66 | 49 | 3.5 | 50 | 46 | 41 | 39.9 | 39 | 16 |
| S1CI-45-42KDS | M45X2 | M42X2 | 35 | 46.5 | 36 | 35.5 | 20 | 76 | 58 | 3.5 | 60 | 55 | 50 | 49.9 | 49 | 16 |
| S1CI-52-48KDS | M52X2 | M48X2 | 42 | 51.5 | 40.5 | 40.5 | 22 | 87 | 63 | 3.5 | 70 | 60 | 60 | 55.9 | 55 | 16 |
| S1DI-14-12KDS | M14X1.5 | M12X1.5 | 06 | 23.5 | 16.5 | 14 | 12 | 30 | 31 | 3.0 | 22 | 19 | 17 | 17 | 17 | 40 |
| S1DI-16-14KDS | M16X1.5 | M14X1.5 | 08 | 23.5 | 16.5 | 14 | 12 | 30 | 31 | 3.0 | 22 | 19 | 19 | 18.9 | 19 | 40 |
| S1DI-18-16KDS | M18X1.5 | M16X1.5 | 10 | 26 | 18.5 | 16.5 | 12 | 36 | 35 | 3.0 | 27 | 24 | 22 | 21.9 | 21 | 40 |
| S1DI-20-18KDS | M20X1.5 | M18X1.5 | 12 | 27.5 | 20 | 18.5 | 12 | 39.5 | 36 | 3.0 | 27 | 27 | 24 | 23.9 | 23 | 40 |
| S1DI-22-20KDS | M22X1.5 | M20X1.5 | 14 | 30.5 | 22.5 | 20 | 14 | 43.5 | 40 | 3.0 | 32 | 30 | 27 | 32 | 25 | 40 |
| S1DI-24-22KDS | M24X1.5 | M22X1.5 | 16 | 30.5 | 22 | 21.5 | 14 | 45 | 40 | 4.5 | 32 | 30 | 30 | 26.9 | 27 | 31.5 |
| S1DI-30-27KDS | M30X2 | M27X2 | 20 | 37 | 26.5 | 24 | 16 | 53 | 48 | 3.5 | 41 | 36 | 36 | 32.9 | 32 | 31.5 |
| S1DI-36-33KDS | M36X2 | M33X2 | 25 | 43.5 | 31.5 | 30.5 | 18 | 66 | 56 | 3.5 | 50 | 46 | 46 | 39.9 | 39 | 25 |
| S1DI-42KDS | M42X2 | M42X2 | 30 | 50.5 | 37 | 35.5 | 20 | 76 | 64 | 3.5 | 60 | 55 | 50 | 49.9 | 49 | 16 |
| S1DI-52-48KDS | M52X2 | M48X2 | 38 | 57.5 | 41.5 | 40.5 | 22 | 87 | 72 | 3.5 | 70 | 60 | 60 | 55.9 | 55 | 16 |


注：如需带卡套及卡套螺母整套订货，则请在代号后加“RN”，如S1CI-30-26KDS/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix "RN" after our part NO, for example S1CI-30-26KDS/RN.



| 代号 PART NO. | 螺纹 THREAD | 管子外径 D TUDE O.D. | 尺寸 DIMENSIONS | | | | | | | | | | 工作压力 Mpa | | |
|----------------|-----------|---------------------|---------------|------|-----------|------|----|----|----|-----|------|----|-------------|----|------|
| | | | T1 | T2 | TUDE O.D. | L1 | L2 | L3 | L4 | L5 | L6 | L7 | D1 | S1 | S2 |
| S1CI-12-B02KDS | M12X1.5 | G1/8" X28 | 06 | 19 | 12 | 10.5 | 8 | 24 | 27 | 2.5 | 14.9 | 17 | 17 | 14 | 31.5 |
| S1CI-14-B04KDS | M14X1.5 | G1/4" X19 | 08 | 21.5 | 14.5 | 14 | 12 | 30 | 29 | 3.0 | 18.9 | 22 | 19 | 17 | 31.5 |
| S1CI-16-B04KDS | M16X1.5 | G1/4" X19 | 10 | 22.5 | 15.5 | 14 | 12 | 30 | 30 | 3.0 | 18.9 | 22 | 19 | 19 | 31.5 |
| S1CI-18-B06KDS | M18X1.5 | G3/8" X19 | 12 | 25 | 18.0 | 16.5 | 12 | 36 | 33 | 3.0 | 21.9 | 27 | 24 | 22 | 31.5 |
| S1CI-22-B08KDS | M22X1.5 | G1/2" X14 | 15 | 28.5 | 21.5 | 21.5 | 14 | 45 | 37 | 4.5 | 26.9 | 32 | 30 | 27 | 31.5 |
| S1CI-26-B08KDS | M26X1.5 | G1/2" X14 | 18 | 28.5 | 21 | 21.5 | 14 | 45 | 37 | 4.5 | 26.9 | 32 | 30 | 32 | 31.5 |
| S1CI-30-B12KDS | M30X2 | G3/4" X14 | 22 | 35 | 27.5 | 24 | 16 | 53 | 44 | 3.5 | 32.9 | 41 | 36 | 36 | 16 |
| S1CI-36-B16KDS | M36X2 | G1" X11 | 28 | 39.5 | 32 | 30.5 | 18 | 66 | 49 | 3.5 | 39.9 | 50 | 46 | 41 | 16 |
| S1CI-45-B20KDS | M45X2 | G1.1/4" X11 | 35 | 46.5 | 36 | 35.5 | 20 | 76 | 58 | 3.5 | 49.9 | 60 | 55 | 50 | 16 |
| S1CI-52-B24KDS | M52X2 | G1.1/2" X11 | 42 | 51.5 | 40.5 | 40.5 | 22 | 87 | 63 | 3.5 | 55.9 | 70 | 60 | 60 | 16 |
| S1DI-14-B04KDS | M14X1.5 | G1/4" X19 | 06 | 23.5 | 16.5 | 14 | 12 | 30 | 31 | 3.0 | 18.9 | 22 | 19 | 17 | 40 |
| S1DI-16-B04KDS | M16X1.5 | G1/4" X19 | 08 | 23.5 | 16.5 | 14 | 12 | 30 | 31 | 3.0 | 18.9 | 22 | 19 | 19 | 40 |
| S1DI-18-B06KDS | M18X1.5 | G3/8" X19 | 10 | 26 | 18.5 | 16.5 | 12 | 36 | 35 | 3.0 | 21.9 | 27 | 24 | 22 | 40 |
| S1DI-20-B06KDS | M20X1.5 | G3/8" X19 | 12 | 26 | 18.5 | 16.5 | 12 | 36 | 35 | 3.0 | 21.9 | 27 | 24 | 24 | 40 |
| S1DI-22-B08KDS | M22X1.5 | G1/2" X14 | 14 | 30.5 | 22.5 | 21.5 | 15 | 45 | 40 | 4.5 | 26.9 | 32 | 30 | 27 | 40 |
| S1DI-24-B08KDS | M24X1.5 | G1/2" X14 | 16 | 30.5 | 22 | 21.5 | 14 | 45 | 40 | 4.5 | 26.9 | 32 | 30 | 30 | 31.5 |
| S1DI-30-B12KDS | M30X2 | G3/4" X14 | 20 | 37 | 26.5 | 24 | 16 | 53 | 48 | 3.5 | 32.9 | 41 | 36 | 36 | 31.5 |
| S1DI-36-B16KDS | M36X2 | G1" X11 | 25 | 43.5 | 31.5 | 30.5 | 18 | 66 | 56 | 3.5 | 39.9 | 50 | 46 | 46 | 25 |
| S1DI-42-B20KDS | M42X2 | G1.1/4" X11 | 30 | 50.5 | 37 | 35.5 | 20 | 76 | 64 | 3.5 | 49.9 | 60 | 55 | 50 | 16 |
| S1DI-52-B24KDS | M52X2 | G1.1/2" X11 | 38 | 57.5 | 41.5 | 40.5 | 22 | 87 | 72 | | | | | | |

**S4C、S4D
S4C/RN、S4D/RN**

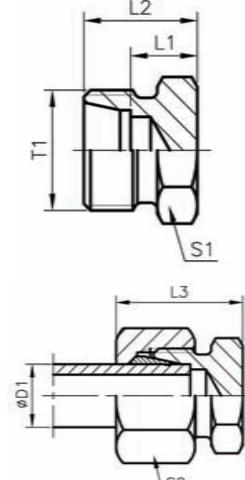


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1 | 尺寸 DIMENSIONS | | | | 重量 克/件 (bar) | 工作压力 Series |
|----------------|-----------|--|------------|---------------|----|----|----|--------------------|----------------|
| | T1 | | | L1 | L2 | L3 | S1 | | |
| S4C-12 | M12X1.5 | | 06 | 7 | 14 | 22 | 12 | 14 | 8 500 |
| S4C-14 | M14X1.5 | | 08 | 8 | 15 | 23 | 14 | 17 | 13 500 |
| S4C-16 | M16X1.5 | | 10 | 9 | 16 | 24 | 17 | 19 | 17 500 |
| S4C-18 | M18X1.5 | | 12 | 10 | 17 | 25 | 19 | 22 | 24 400 |
| S4C-22 | M22X1.5 | | 15 | 11 | 18 | 26 | 24 | 27 | 41 400 |
| S4C-26 | M26X1.5 | | 18 | 11.5 | 19 | 28 | 27 | 32 | 56 400 |
| S4C-30 | M30X2 | | 22 | 13.5 | 21 | 30 | 32 | 36 | 84 250 |
| S4C-36 | M36X2 | | 28 | 14.5 | 22 | 31 | 41 | 41 | 138 250 |
| S4C-45 | M45X2 | | 35 | 14.5 | 25 | 36 | 46 | 50 | 203 250 |
| S4C-52 | M52X2 | | 42 | 16 | 27 | 39 | 55 | 60 | 318 250 |
| S4D-14 | M14X1.5 | | 06 | 11 | 18 | 26 | 14 | 17 | 17 800 |
| S4D-16 | M16X1.5 | | 08 | 13 | 20 | 28 | 17 | 19 | 28 800 |
| S4D-18 | M18X1.5 | | 10 | 14.5 | 20 | 29 | 19 | 22 | 33 800 |
| S4D-20 | M20X1.5 | | 12 | 14.5 | 22 | 31 | 22 | 24 | 50 630 |
| S4D-22 | M22X1.5 | | 14 | 16 | 24 | 34 | 24 | 27 | 62 630 |
| S4D-24 | M24X1.5 | | 16 | 15.5 | 24 | 34 | 27 | 30 | 75 630 |
| S4D-30 | M30X2 | | 20 | 17.5 | 28 | 39 | 32 | 36 | 125 420 |
| S4D-36 | M36X2 | | 25 | 20 | 32 | 44 | 41 | 46 | 229 420 |
| S4D-42 | M42X2 | | 30 | 20.5 | 34 | 47 | 46 | 50 | 310 420 |
| S4D-52 | M52X2 | | 38 | 23 | 39 | 54 | 55 | 60 | 805 420 |

| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1 | 尺寸 DIMENSIONS | | | | 重量 克/件 (bar) | 工作压力 Series |
|----------------|-----------|----|------------|---------------|----|----|----|--------------------|----------------|
| | T1 | | | L1 | L2 | L3 | S1 | | |
| S9C-12 | M12X1.5 | 06 | 18.5 | 06 | 14 | | | 15 | 500 |
| S9C-14 | M14X1.5 | 08 | 18.5 | 08 | 17 | | | 24 | 500 |
| S9C-16 | M16X1.5 | 10 | 20 | 10 | 19 | | | 33 | 500 |
| S9C-18 | M18X1.5 | 12 | 20.5 | 12 | 22 | | | 46 | 400 |
| S9C-22 | M22X1.5 | 15 | 20.5 | 15 | 27 | | | 73 | 400 |
| S9C-26 | M26X1.5 | 18 | 22.5 | 18 | 32 | | | 111 | 400 |
| S9C-30 | M30X2 | 22 | 25 | 22 | 36 | | | 162 | 250 |
| S9C-36 | M36X2 | 28 | 25.5 | 28 | 41 | | | 220 | 250 |
| S9C-45 | M45X2 | 35 | 30 | 35 | 50 | | | 376 | 250 |
| S9C-52 | M52X2 | 42 | 30 | 42 | 60 | | | 558 | 250 |
| S9D-14 | M14X1.5 | 06 | 18.5 | 06 | 17 | | | 23 | 800 |
| S9D-16 | M16X1.5 | 08 | 18.5 | 08 | 19 | | | 29 | 800 |
| S9D-18 | M18X1.5 | 10 | 20 | 10 | 22 | | | 46 | 800 |
| S9D-20 | M20X1.5 | 12 | 20.5 | 12 | 24 | | | 55 | 630 |
| S9D-22 | M22X1.5 | 14 | 22.5 | 14 | 27 | | | 83 | 630 |
| S9D-24 | M24X1.5 | 16 | 23.5 | 16 | 30 | | | 106 | 630 |
| S9D-30 | M30X2 | 20 | 28.5 | 20 | 36 | | | 180 | 420 |
| S9D-36 | M36X2 | 25 | 29 | 25 | 46 | | | 322 | 420 |
| S9D-42 | M42X2 | 30 | 30.5 | 30 | 50 | | | 398 | 420 |
| S9D-52 | M52X2 | 38 | 33 | 38 | 60 | | | 647 | 420 |

注: 如需带卡套及卡套螺母整套订货, 则请在代号后加“RN”, 如S4C-30/RN。

Note: In case if you are interested to order the adapter in complete set with cutting ring and nut, it is necessary to insert suffix “RN” after our part NO., for example S4C-30/RN.


**SNL
SNS**



A类


| 代号 PART NO. | 螺纹 THREAD | | 管子外径 TUBE O.D. | 尺寸 DIMENSIONS | | | | 重量 克/件 | 工作压力 Series |
|----------------|-----------|----|-------------------|---------------|----|--|----|-----------|----------------|
| | T1 | | | L1 | D1 | | S1 | | |
| SNL-12 | M12X1.5 | 06 | 15 | 06 | | | | 14 | 10 |
| SNL-14 | M14X1.5 | 08 | 15 | 08 | | | | 17 | 15 |
| SNL-16 | M16X1.5 | 10 | 16 | 10 | | | | 19 | 18 |
| SNL-18 | M18X1.5 | 12 | 16 | 12 | | | | 22 | 25 |
| SNL-22 | M22X1.5 | 15 | 17.5 | 15 | | | | 27 | 42 |
| SNL-26 | M26X1.5 | 18 | 18.5 | 18 | | | | 32 | 62 |
| SNL-30 | M30X2 | 22 | 20.5 | 22 | | | | 36 | 82 |
| SNL-36 | M36X2 | 28 | 21 | 28 | | | | 41 | 89 |
| SNL-45 | M45X2 | 35 | 24 | 35 | | | | 50 | 137 |
| SNL-52 | M52X2 | 42 | 24 | 42 | | | | 60 | 216 |
| SNS-14 | M14X1.5 | 06 | 17 | 06 | | | | 17 | 17 |
| SNS-16 | M16X1.5 | 08 | 17 | 08 | | | | 19 | 20 |
| SNS-18 | M18X1.5 | 10 | 18 | 10 | | | | 22 | 31 |
| SNS-20 | M20X1.5 | 12 | 18 | 12 | | | | 24 | 34 |
| SNS-22 | M22X1.5 | 14 | 21 | 14 | | | | 27 | 53 |
| SNS-24 | M24X1.5 | 16 | 21 | 16 | | | | 30 | 66 |
| SNS-30 | M30X2 | 20 | 24.5 | 20 | | | | 36 | 102 |
| SNS-36 | M36X2 | 25 | 27 | 25 | | | | 46 | 202 |
| SNS-42 | M42X2 | 30 | 29 | 30 | | | | 50 | 219 |
| SNS-52 | M52X2 | 38 | 32.5 | 38 | | | | 60 | 339 |

**S9C
S9D**



| 代号 PART NO. | 螺纹 THREAD | | 管子外径 D1 | 尺寸 DIMENSIONS | | | | 重量 克/件 (bar) | 工作压力 Series |
|----------------|-----------|----|------------|---------------|----|----|--|--------------------|----------------|
| | T1 | | | L1 | D2 | S1 | | | |
| S9C-12 | M12X1.5 | 06 | 18.5 | 06 | 14 | | | 15 | 500 |
| S9C-14 | M14X1.5 | 08 | 18.5 | 08 | 17 | | | 24 | 500 |

S1E

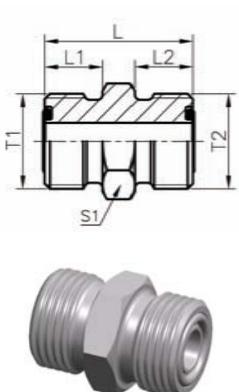


公制外螺纹O型圈平面密封
METRIC MALE O-RING

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|----------|---------------|----|----|----|-------------|
| | T1 | T2 | L | L1 | L2 | S1 | |
| S1E-12 | M12X1.25 | M12X1.25 | 28 | 10 | 10 | 14 | 63 |
| S1E-14 | M14X1.5 | M14X1.5 | 28 | 11 | 11 | 17 | |
| S1E-16 | M16X1.5 | M16X1.5 | 28 | 11 | 11 | 17 | |
| S1E-18 | M18X1.5 | M18X1.5 | 28 | 11 | 11 | 19 | |
| S1E-22 | M22X1.5 | M22X1.5 | 32 | 12 | 12 | 24 | |
| S1E-27 | M27X1.5 | M27X1.5 | 36 | 13 | 13 | 30 | |
| S1E-30 | M30X1.5 | M30X1.5 | 39 | 14 | 14 | 32 | |
| S1E-36 | M36X2 | M36X2 | 43 | 16 | 16 | 41 | |
| S1E-39 | M39X2 | M39X2 | 49 | 18 | 18 | 41 | |
| S1E-42 | M42X2 | M42X2 | 53 | 20 | 20 | 46 | |
| S1E-45 | M45X2 | M45X2 | 55 | 21 | 21 | 46 | 40 |
| S1E-52 | M52X2 | M52X2 | 59 | 22 | 22 | 55 | |
| S1E-60 | M60X2 | M60X2 | 59 | 22 | 22 | 65 | |

E

公制

S1E9

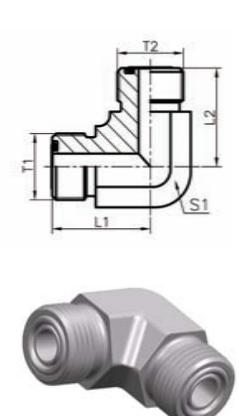


90° 弯公制外螺纹O型圈平面密封
90° METRIC MALE O-RING

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|----------|---------------|------|--|----|-------------|
| | T1 | T2 | L1 | L2 | | S1 | |
| S1E9-12 | M12X1.25 | M12X1.25 | 20.5 | 20.5 | | 12 | 63 |
| S1E9-14 | M14X1.5 | M14X1.5 | 22.5 | 22.5 | | 14 | |
| S1E9-16 | M16X1.5 | M16X1.5 | 24 | 24 | | 17 | |
| S1E9-18 | M18X1.5 | M18X1.5 | 26 | 26 | | 19 | |
| S1E9-22 | M22X1.5 | M22X1.5 | 29 | 29 | | 22 | |
| S1E9-27 | M27X1.5 | M27X1.5 | 32.5 | 32.5 | | 27 | |
| S1E9-30 | M30X1.5 | M30X1.5 | 35.5 | 35.5 | | 30 | |
| S1E9-36 | M36X2 | M36X2 | 42 | 42 | | 36 | |
| S1E9-39 | M39X2 | M39X2 | 47.5 | 47.5 | | 41 | |
| S1E9-42 | M42X2 | M42X2 | 49.5 | 49.5 | | 41 | |
| S1E9-45 | M45X2 | M45X2 | 52.5 | 52.5 | | 46 | 40 |
| S1E9-52 | M52X2 | M52X2 | 57 | 57 | | 50 | |

E

公制

S1EH

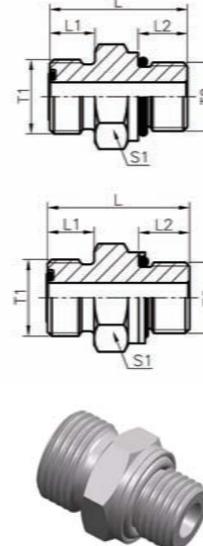


公制外螺纹O型圈平面密封/公制外螺纹重系列 ISO 6149
METRIC MALE O-RING /METRIC MALE S-SERIES BONDED ISO 6149

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|----------|---------------|----|------|----|-------------|
| | T1 | T2 | L | L1 | L2 | S1 | |
| S1EH-12-10 | M12X1.25 | M10X1 | 28 | 11 | 9.5 | 14 | 63 |
| S1EH-14-12 | M14X1.5 | M12X1.25 | 28 | 11 | 11 | 17 | |
| S1EH-16-14 | M16X1.5 | M14X1.5 | 28 | 11 | 11 | 19 | |
| S1EH-18-16 | M18X1.5 | M16X1.5 | 31.5 | 11 | 12.5 | 22 | |
| S1EH-22-18 | M22X1.5 | M18X1.5 | 34.5 | 12 | 14 | 24 | |
| S1EH-27-22 | M27X1.5 | M22X1.5 | 38 | 13 | 15 | 30 | |
| S1EH-30-27 | M30X1.5 | M27X2 | 43.5 | 14 | 18.5 | 32 | |
| S1EH-36-33 | M36X2 | M33X2 | 47.5 | 16 | 18.5 | 41 | |
| S1EH-39-33 | M39X2 | M33X2 | 49.5 | 18 | 18.5 | 41 | |
| S1EH-42 | M42X2 | M42X2 | 54 | 20 | 19 | 50 | |
| S1EH-45-42 | M45X2 | M42X2 | 54 | 21 | 19 | 50 | 25 |
| S1EH-52-48 | M52X2 | M48X2 | 58.5 | 22 | 21.5 | 55 | |

注:若需配挡圈请在代号后加“DQ”，如S1EH-30-27DQ。

Note: If you interested to order the adapter with retainer ring, please insert suffix "DQ" after our part NO, for example S1EH-30-27DQ

S1EH4-OG

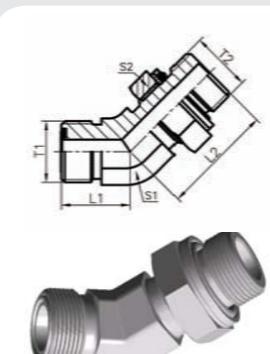


45° 弯公制外螺纹O型圈平面密封/公制外螺纹可调向柱端重系列 ISO 6149-2
45° METRIC MALE O-RING /METRIC MALE ADJUSTABLE STUD END S-SERIES ISO 6149-2

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------------|------|--|----|-------------|
| | T1 | T2 | L1 | L2 | | S1 | |
| S1EH4-12-10OG | M12X1.25 | M10X1 | 18 | 25.5 | | 12 | 63 |
| S1EH4-14-12OG | M14X1.5 | M12X1.5 | 19.5 | 27 | | 14 | |
| S1EH4-16-14OG | M16X1.5 | M14X1.5 | 20 | 28 | | 17 | |
| S1EH4-18-16OG | M18X1.5 | M16X1.5 | 21.5 | 34 | | 19 | |
| S1EH4-22-18OG | M22X1.5 | M18X1.5 | 23 | 34 | | 22 | |
| S1EH4-27-22OG | M27X1.5 | M22X1.5 | 24.5 | 40.5 | | 27 | |
| S1EH4-30-27OG | M30X1.5 | M27X2 | 26 | 48 | | 30 | |
| S1EH4-36-33OG | M36X2 | M33X2 | 30.5 | 49.5 | | 36 | |
| S1EH4-39-33OG | M39X2 | M33X2 | 36 | 52 | | 41 | |
| S1EH4-42OG | M42X2 | M42X2 | 38 | 53 | | 41 | |
| S1EH4-45-42OG | M45X2 | M42X2 | 39 | 54 | | 46 | 25 |
| S1EH4-52-48OG | M52X2 | M48X2 | 42 | 58.5 | | 50 | |

注:若需配挡圈请在代号后加“DQ”，如S1EH4-30-27OGDQ。


Note: If you interested to order the adapter with retainer ring, please insert suffix "DQ" after our part NO, for example S1EH4-30-27OGDQ

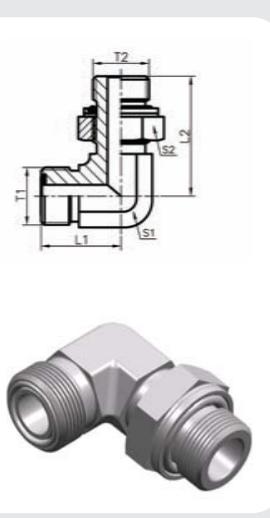S1EH9-OG

90° 弯公制外螺纹O型圈平面密封/公制外螺纹可调柱端重系列 ISO 6149-2
90° METRIC MALE O-RING /METRIC MALE ADJUSTABLE STUD END S-SERIES ISO 6149-2


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------------|------|------|----|-------------|
| | T1 | T2 | L1 | L2 | | S1 | |
| S1EH9-12-10OG | M12X1.25 | M10X1 | | 20.5 | 28.5 | | 14 |
| S1EH9-14-12OG | M14X1.5 | M12X1.5 | | 22.5 | 33.2 | | 17 |
| S1EH9-16-14OG | M16X1.5 | M14X1.5 | | 24 | 36 | | 19 |
| S1EH9-18-16OG | M18X1.5 | M16X1.5 | | 26 | 39 | | 22 |
| S1EH9-22-18OG | M22X1.5 | M18X1.5 | | 29 | 44 | | 24 |
| S1EH9-27-22OG | M27X1.5 | M22X1.5 | | 32.5 | 48 | | 27 |
| S1EH9-30-27OG | M30X1.5 | M27X2 | | 35.5 | 57 | | 31 |
| S1EH9-36-33OG | M36X2 | M33X2 | | 42 | 60.5 | | 41 |
| S1EH9-39-33OG | M39X2 | M33X2 | | 47.5 | 64 | | 41 |
| S1EH9-42OG | M42X2 | M42X2 | | 49.5 | 65 | | 50 |
| S1EH9-45-42OG | M45X2 | M42X2 | | 52.5 | 67.5 | | 50 |
| S1EH9-52-48OG | M52X2 | M48X2 | | 57 | 73.5 | | 55 |
| | | | | | | | 20 |

注:若需配挡圈请在代号后加“DQ”，如 S1EH9-30-27OGDQ
Note: If you interested to order the adapter with retainer ring, please insert suffix "DQ"
after our part NO, for example S1EH9-30-27OGDQ

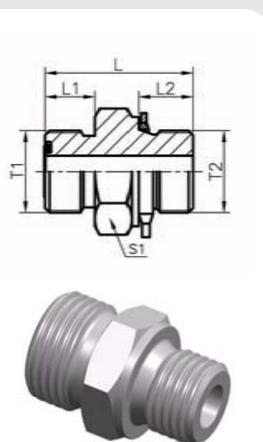S1EL

公制外螺纹O型圈平面密封/公制外螺纹组合垫圈
METRIC MALE O-RING /METRIC MALE WITH BONDED SEAL BONDED SEAL


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------------|----|----|------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | |
| S1EL-14 | M14X1.5 | M14X1.5 | | 11 | 12 | 30.5 | 19 |
| S1EL-16-14 | M16X1.5 | M14X1.5 | | 11 | 12 | 30 | 19 |
| S1EL-22-18 | M22X1.5 | M18X1.5 | | 12 | 12 | 33.5 | 24 |
| S1EL-27-22 | M27X1.5 | M22X1.5 | | 13 | 14 | 38.5 | 30 |
| S1EL-30-27 | M30X1.5 | M27X2 | | 14 | 16 | 41 | 36 |
| S1EL-36-33 | M36X2 | M33X2 | | 16 | 18 | 49 | 41 |
| S1EL-42 | M42X2 | M42X2 | | 21 | 20 | 56 | 50 |
| S1EL-52-48 | M52X2 | M48X2 | | 22 | 22 | 61 | 60 |

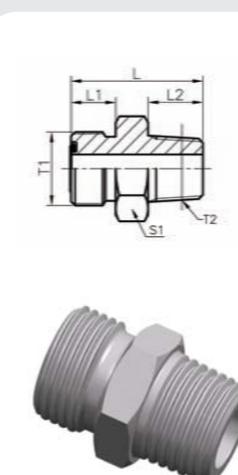S1EN

公制外螺纹O型圈/布锥管外螺纹
METRIC MALE O-RING /NPT MALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|-----------------|---------------|----|----|----|-------------|
| | T1 | T2 | L | L1 | L2 | S1 | |
| S1EN-14-04 | M14X1.5 | NPT1/4" X18 | | | | | 17 |
| S1EN-14-06 | M14X1.5 | NPT3/8" X18 | | | | | 21 |
| S1EN-16-04 | M16X1.5 | NPT1/4" X18 | | | | | 27.5 |
| S1EN-16-06 | M16X1.5 | NPT3/8" X18 | | | | | 17 |
| S1EN-16-08 | M16X1.5 | NPT1/2" X14 | | | | | 21 |
| S1EN-18-04 | M18X1.5 | NPT1/4" X18 | | | | | 27.5 |
| S1EN-18-06 | M18X1.5 | NPT3/8" X18 | | | | | 19 |
| S1EN-18-08 | M18X1.5 | NPT1/2" X14 | | | | | 22 |
| S1EN-22-08 | M22X1.5 | NPT1/2" X14 | | | | | 24 |
| S1EN-22-12 | M22X1.5 | NPT3/4" X14 | | | | | 27 |
| S1EN-24-06 | M24X1.5 | NPT3/8" X18 | | | | | 27 |
| S1EN-24-08 | M24X1.5 | NPT1/2" X14 | | | | | 21 |
| S1EN-27-08 | M27X1.5 | NPT1/2" X14 | | | | | 30 |
| S1EN-27-12 | M27X1.5 | NPT3/4" X14 | | | | | 30 |
| S1EN-30-12 | M30X1.5 | NPT3/4" X14 | | | | | 32 |
| S1EN-36-12 | M36X2 | NPT3/4" X14 | | | | | 17 |
| S1EN-36-16 | M36X2 | NPT1" X11.5 | | | | | 41 |
| S1EN-39-16 | M39X2 | NPT1" X11.5 | | | | | 41 |
| S1EN-39-20 | M39X2 | NPT1.1/4" X11.5 | | | | | 8 |
| S1EN-42-16 | M42X2 | NPT1" X11.5 | | | | | 46 |
| S1EN-42-20 | M42X2 | NPT1.1/4" X11.5 | | | | | 14 |
| S1EN-45-20 | M45X2 | NPT1.1/4" X11.5 | | | | | 46 |
| S1EN-52-20 | M52X2 | NPT1.1/4" X11.5 | | | | | 55 |
| S1EN-60-24 | M60X2 | NPT1.1/2" X11.5 | | | | | 65 |

S1ET-SP

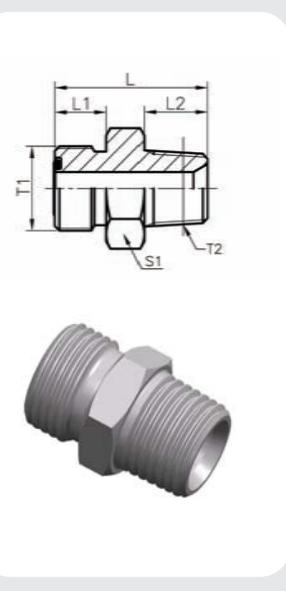


公制外螺纹O型圈/英锥管外螺纹
METRIC MALE O-RING /BSPT MALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|------------|---------------|----|------|------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | |
| S1ET-14-04SP | M14X1.5 | R1/4"X19 | | 11 | 26.2 | 33.2 | 17 |
| S1ET-14-06SP | M14X1.5 | R3/8"X19 | | 11 | 28 | 35 | 17 |
| S1ET-16-04SP | M16X1.5 | R1/4"X19 | | 11 | 26.2 | 34.2 | 17 |
| S1ET-16-06SP | M16X1.5 | R3/8"X19 | | 11 | 28 | 36 | 17 |
| S1ET-18-06SP | M18X1.5 | R3/8"X19 | | 11 | 28 | 37 | 19 |
| S1ET-18-08SP | M18X1.5 | R1/2"X14 | | 11 | 31.5 | 40.5 | 22 |
| S1ET-22-08SP | M22X1.5 | R1/2"X14 | | 12 | 32.5 | 42 | 24 |
| S1ET-22-12SP | M22X1.5 | R3/4"X14 | | 12 | 33 | 42.5 | 27 |
| S1ET-24-06SP | M24X1.5 | R3/8"X19 | | 12 | 32 | 43 | 27 |
| S1ET-24-08SP | M24X1.5 | R1/2"X14 | | 12 | 33 | 44 | 27 |
| S1ET-27-08SP | M27X1.5 | R1/2"X14 | | 13 | 33.5 | 44.5 | 30 |
| S1ET-27-12SP | M27X1.5 | R3/4"X14 | | 13 | 33.5 | 44.5 | 30 |
| S1ET-30-12SP | M30X1.5 | R3/4"X14 | | 14 | 33.5 | 46.5 | 32 |
| S1ET-36-12SP | M36X2 | R3/4"X14 | | 16 | 40 | 51 | 38 |
| S1ET-36-16SP | M36X2 | R1"X11 | | 16 | 44 | 55 | 38 |
| S1ET-39-16SP | M39X2 | R1"X11 | | 18 | 46 | 59 | 41 |
| S1ET-39-20SP | M39X2 | R1.1/4"X11 | | 18 | 50 | 63 | 46 |
| S1ET-42-20SP | M42X2 | R1.1/4"X11 | | 20 | 52 | 65 | 46 |
| S1ET-45-20SP | M45X2 | R1.1/4"X11 | | 21 | 53 | 66 | 46 |
| S1ET-52-24SP | M52X2 | R1.1/2"X11 | | 22 | 54 | 67 | 55 |
| | | | | 22 | 54 | 67 | 10.5 |

E

公制

S1EW9

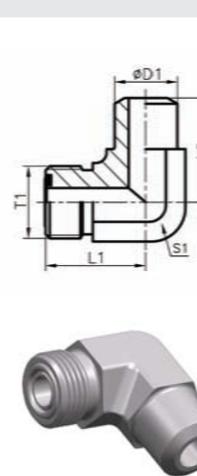


90° 弯公制外螺纹O型圈平面密封/焊接管
90° METRIC MALE O-RING /BUTT-WELD TUBE

| 代号 PART NO. | 螺纹 THREAD | | 管子直径 | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|--|------|---------------|----|----|----|-------------|
| | T1 | | D1 | L1 | L2 | S1 | | |
| S1EW9-12-06 | M12X1.25 | | 6 | 24 | 10 | 8 | 14 | 12 |
| S1EW9-14-08 | M14X1.5 | | 8 | 25 | 11 | 8 | 17 | 14 |
| S1EW9-16-10 | M16X1.5 | | 10 | 25 | 11 | 8 | 17 | 17 |
| S1EW9-18-12 | M18X1.5 | | 12 | 29 | 11 | 12 | 19 | 19 |
| S1EW9-22-14 | M22X1.5 | | 14 | 32 | 12 | 12 | 24 | 22 |
| S1EW9-27-18 | M27X1.5 | | 18 | 34 | 13 | 12 | 30 | 27 |
| S1EW9-30-22 | M30X1.5 | | 22 | 37 | 14 | 14 | 32 | 30 |
| S1EW9-36-28 | M36X2 | | 28 | 42 | 16 | 16 | 41 | 36 |
| S1EW9-39-30 | M39X2 | | 30 | 47 | 18 | 16 | 41 | 41 |
| S1EW9-42-34 | M42X2 | | 34 | 50 | 20 | 16 | 46 | 41 |
| S1EW9-45-38 | M45X2 | | 38 | 52 | 21 | 18 | 46 | 46 |
| S1EW9-52-42 | M52X2 | | 42 | 56 | 22 | 18 | 55 | 50 |

E

公制


S1EW

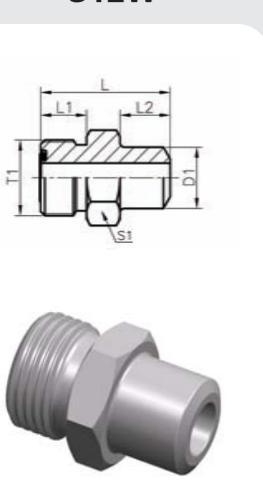

公制外螺纹O型圈平面密封/焊接管
METRIC MALE O-RING /BUTT-WELD TUBE

| 代号 PART NO. | 螺纹 THREAD | | 管子直径 | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|--|------|---------------|----|----|----|-------------|
| | T1 | | D1 | L | L1 | L2 | S1 | |
| S1EW-12-06 | M12X1.25 | | 6 | 24 | 10 | 8 | 14 | 12 |
| S1EW-14-08 | M14X1.5 | | 8 | 25 | 11 | 8 | 17 | 14 |
| S1EW-16-10 | M16X1.5 | | 10 | 25 | 11 | 8 | 17 | 17 |
| S1EW-18-12 | M18X1.5 | | 12 | 29 | 11 | 12 | 19 | 19 |
| S1EW-22-14 | M22X1.5 | | 14 | 32 | 12 | 12 | 24 | 22 |
| S1EW-27-18 | M27X1.5 | | 18 | 34 | 13 | 12 | 30 | 27 |
| S1EW-30-22 | M30X1.5 | | 22 | 37 | 14 | 14 | 32 | 30 |
| S1EW-36-28 | M36X2 | | 28 | 42 | 16 | 16 | 41 | 36 |
| S1EW-39-30 | M39X2 | | 30 | 47 | 18 | 16 | 41 | 41 |
| S1EW-42-34 | M42X2 | | 34 | 50 | 20 | 16 | 46 | 41 |
| S1EW-45-38 | M45X2 | | 38 | 52 | 21 | 18 | 46 | 46 |
| S1EW-52-42 | M52X2 | | 42 | 56 | 22 | 18 | 55 | 50 |


S2E9

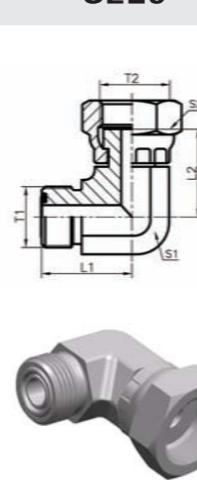

90° 弯公制外螺纹O型圈平面密封
90° METRIC MALE O-RING

| 代号 PART NO. | 螺纹 THREAD | | 管子直径 | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|----------|------|---------------|----|------|----|-------------|
| | T1 | T2 | | L1 | L2 | S1 | S2 | |
| S2E9-12 | M12X1.25 | M12X1.25 | | | | 20.5 | | 12 17 |
| S2E9-14 | M14X1.5 | M14X1.5 | | | | 22.5 | | 14 19 |
| S2E9-16 | M16X1.5 | M16X1.5 | | | | 24 | | 17 22 |
| S2E9-18 | M18X1.5 | M18X1.5 | | | | 26 | | 19 24 |
| S2E9-22 | M22X1.5 | M22X1.5 | | | | 29 | | 22 27 |
| S2E9-27 | M27X1.5 | M27X1.5 | | | | 32.5 | | 27 32 |
| S2E9-30 | M30X1.5 | M30X1.5 | | | | 35.5 | | 30 36 |
| S2E9-36 | M36X2 | M36X2 | | | | 42 | | 36 41 |
| S2E9-39 | M39X2 | M39X2 | | | | 47.5 | | 41 46 |
| S2E9-42 | M42X2 | M42X2 | | | | 49.5 | | 41 50 |
| S2E9-45 | M45X2 | M45X2 | | | | 52.5 | | 46 55 |
| S2E9-52 | M52X2 | M52X2 | | | | 57 | | 50 60 |

S2WE

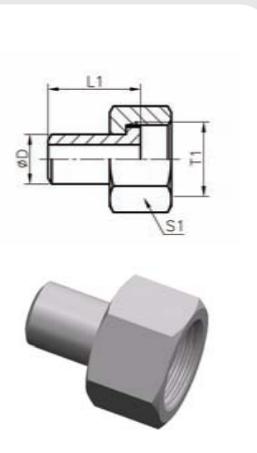


焊接管/公制内螺纹O型圈平面密封
BUTT-WELD TUBE / FEMALE O-RING

| 代号 PART NO. | 螺纹 THREAD | 管子直径 TUBE O.D | 尺寸 DIMENSIONS | | | | 工作压力 Mpa | |
|----------------|-----------|---------------|---------------|---|----|----|-------------|--|
| | | | T1 | D | L1 | L2 | | |
| S2EW-06-12 | M12X1.25 | 6 | | | 22 | 14 | 6 | |
| S2EW-08-14 | M14X1.5 | 8 | | | 22 | 17 | 8 | |
| S2EW-10-16 | M16X1.5 | 10 | | | 24 | 19 | 10 | |
| S2EW-12-18 | M18X1.5 | 12 | | | 26 | 22 | 12 | |
| S2EW-14-22 | M22X1.5 | 14 | | | 28 | 27 | 14 | |
| S2EW-18-27 | M27X1.5 | 18 | | | 32 | 32 | 18 | |
| S2EW-22-30 | M30X1.5 | 22 | | | 32 | 36 | 22 | |
| S2EW-28-36 | M36X2 | 28 | | | 35 | 41 | 28 | |
| S2EW-30-39 | M39X2 | 30 | | | 38 | 46 | 30 | |
| S2EW-34-42 | M42X2 | 34 | | | 38 | 50 | 34 | |
| S2EW-38-45 | M45X2 | 38 | | | 40 | 55 | 38 | |
| S2EW-42-52 | M52X2 | 42 | | | 40 | 60 | 42 | |

注:不配螺母时在代号后加 "X", 如: S2WE-18-27X"

Note:Please insert suffix"x" after our part No.if you Order without nut,for example:szwe-18-27x


SAE

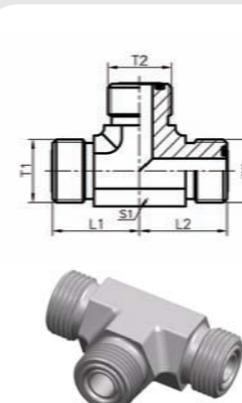

公制外螺纹O型圈平面密封三通接头
METRIC MALE O-RING TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------|---------------|------|------|----|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | |
| SAE-14 | M14X1.5 | M14X1.5 | M14X1.5 | 22.5 | 22.5 | 22.5 | | 14 |
| SAE-16 | M16X1.5 | M16X1.5 | M16X1.5 | 24 | 24 | 24 | | 17 |
| SAE-18 | M18X1.5 | M18X1.5 | M18X1.5 | 26 | 26 | 26 | | 19 |
| SAE-22 | M22X1.5 | M22X1.5 | M22X1.5 | 29 | 29 | 29 | | 22 |
| SAE-27 | M27X1.5 | M27X1.5 | M27X1.5 | 32.5 | 32.5 | 32.5 | | 27 |
| SAE-30 | M30X1.5 | M30X1.5 | M30X1.5 | 35.5 | 35.5 | 35.5 | | 30 |
| SAE-36 | M36X2 | M36X2 | M36X2 | 42 | 42 | 42 | | 36 |
| SAE-39 | M39X2 | M39X2 | M39X2 | 47.5 | 47.5 | 47.5 | | 41 |
| SAE-42 | M42X2 | M42X2 | M42X2 | 49.5 | 49.5 | 49.5 | | 41 |
| SAE-45 | M45X2 | M45X2 | M45X2 | 52.5 | 52.5 | 52.5 | | 46 |
| SAE-52 | M52X2 | M52X2 | M52X2 | 57 | 57 | 57 | | 50 |


S4E



公制外螺纹O型圈平面密封堵头
METRIC MALE O-RING PLUG

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|--|--|---------------|----|--|----|-------------|
| | T1 | | | L1 | L | | S1 | |
| S4E-14 | M14X1.5 | | | 11 | 17 | | 17 | |
| S4E-16 | M16X1.5 | | | 11 | 17 | | 17 | |
| S4E-18 | M18X1.5 | | | 11 | 17 | | 19 | |
| S4E-22 | M22X1.5 | | | 12 | 20 | | 24 | |
| S4E-27 | M27X1.5 | | | 13 | 23 | | 30 | |
| S4E-30 | M30X1.5 | | | 14 | 25 | | 32 | |
| S4E-36 | M36X2 | | | 16 | 29 | | 41 | |
| S4E-42 | M42X2 | | | 20 | 33 | | 46 | |
| S4E-45 | M45X2 | | | 21 | 34 | | 46 | |
| S4E-52 | M52X2 | | | 22 | 37 | | 55 | |


SBE

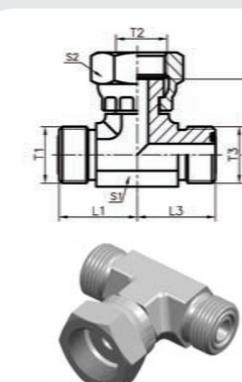

公制外螺纹O型圈平面密封三通接头
METRIC MALE O-RING TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------|---------------|------|----|----|-------------|
| | T1 | T2 | T3 | L1 | L2 | S1 | S2 | |
| SBE-14 | M14X1.5 | M14X1.5 | M14X1.5 | 22.5 | 22.5 | 14 | 19 | |
| SBE-16 | M16X1.5 | M16X1.5 | M16X1.5 | 24 | 24 | 17 | 22 | |
| SBE-18 | M18X1.5 | M18X1.5 | M18X1.5 | 26 | 26 | 19 | 24 | |
| SBE-22 | M22X1.5 | M22X1.5 | M22X1.5 | 29 | 29 | 22 | 27 | |
| SBE-27 | M27X1.5 | M27X1.5 | M27X1.5 | 32.5 | 32.5 | 27 | 32 | |
| SBE-30 | M30X1.5 | M30X1.5 | M30X1.5 | 35.5 | 35.5 | 30 | 36 | |
| SBE-36 | M36X2 | M36X2 | M36X2 | 42 | 42 | 36 | 41 | |
| SBE-39 | M39X2 | M39X2 | M39X2 | 47.5 | 47.5 | 41 | 46 | |
| SBE-42 | M42X2 | M42X2 | M42X2 | 49.5 | 49.5 | 41 | 50 | |
| SBE-45 | M45X2 | M45X2 | M45X2 | 52.5 | 52.5 | 46 | 55 | |
| SBE-52 | M52X2 | M52X2 | M52X2 | 57 | 57 | 50 | 60 | |


S9E



公制内螺纹O型圈平面密封堵头
METRIC FEMALE MALE O-RING PLUG

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|--|--|---------------|----|--|--|-------------|
| | T1 | | | L1 | S1 | | | |
| S9E-12 | M12X1.25 | | | 10 | 14 | | | |
| S9E-14 | M14X1.5 | | | 10.5 | 17 | | | |
| S9E-16 | M16X1.5 | | | 11.5 | 19 | | | |
| S9E-18 | M18X1.5 | | | 13 | 22 | | | |
| S9E-22 | M22X1.5 | | | 13 | 27 | | | |
| S9E-27 | M27X1.5 | | | 15 | 32 | | | |
| S9E-30 | M30X1.5 | | | 15 | 36 | | | |
| S9E-36 | M36X2 | | | 15.5 | 41 | | | |
| S9E-39 | M39X2 | | | 17.5 | 46 | | | |
| S9E-42 | M42X2 | | | 18.5 | 50 | | | |
| S9E-45 | M45X2 | | | 18.5 | 55 | | | |
| S9E-52 | M52X2 | | | 18.5 | 60 | | | |

SCE

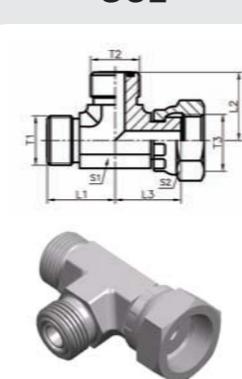

公制外螺纹O型圈平面密封三通接头
METRIC MALE O-RING TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
| --- | --- | --- | --- | --- | --- | --- | --- | --- |
| T1 | T2 | T3 | L1 | L2 | S1 | S2 |

<tbl_r cells="9" ix="4" maxcspan="1" maxrspan="1" used


E

公制

E

公制


SXE



公制外螺纹O型圈平面密封四通接头
METRIC MALE O-RING CROSS

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | | 工作压力 Mpa |
|----------------|-------------|--|---------------|------|------|------|----|-------------|
| | T1/T2/T3/T4 | | L1 | L2 | L3 | L4 | S1 | |
| SXE-14 | M14X1.5 | | 22.5 | 22.5 | 22.5 | 22.5 | 14 | 63 |
| SXE-16 | M16X1.5 | | 24 | 24 | 24 | 24 | 17 | |
| SXE-18 | M18X1.5 | | 26 | 26 | 26 | 26 | 19 | |
| SXE-22 | M22X1.5 | | 29 | 29 | 29 | 29 | 22 | |
| SXE-27 | M27X1.5 | | 32.5 | 32.5 | 32.5 | 32.5 | 27 | 40 |
| SXE-30 | M30X1.5 | | 35.5 | 35.5 | 35.5 | 35.5 | 30 | |
| SXE-36 | M36X2 | | 42 | 42 | 42 | 42 | 36 | |
| SXE-39 | M39X2 | | 47.5 | 47.5 | 47.5 | 47.5 | 41 | |
| SXE-42 | M42X2 | | 49.5 | 49.5 | 49.5 | 49.5 | 41 | 25 |
| SXE-45 | M45X2 | | 52.5 | 52.5 | 52.5 | 52.5 | 46 | |
| SXE-52 | M52X2 | | 57 | 57 | 57 | 57 | 50 | |

S1QG

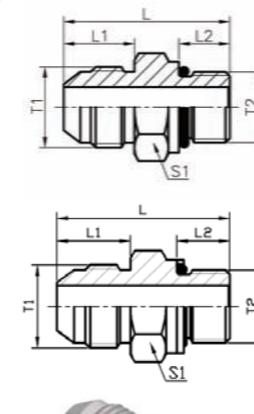


公制外螺纹74° 外锥/英管外螺纹O型圈
METRIC MALE 74° CONE / BSP MALE O-RING

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa | |
|----------------|-----------|--------------|---------------|----|------|------|-------------|----|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1QG-14-04 | M14X1.5 | G1/4 " X19 | | | 18 | 11.2 | 19 | 35 |
| S1QG-16-06 | M16X1.5 | G3/8 " X19 | | | 19 | 11.2 | 40 | |
| S1QG-18-06 | M18X1.5 | G3/8 " X19 | | | 19 | 11.2 | 40 | |
| S1QG-18-08 | M18X1.5 | G1/2 " X14 | | | 19 | 14.5 | 43 | |
| S1QG-22-08 | M22X1.5 | G1/2 " X14 | | | 19.5 | 14.5 | 44.5 | 27 |
| S1QG-27-12 | M27X1.5 | G3/4 " X14 | | | 20.5 | 14.5 | 49.5 | |
| S1QG-30-12 | M30X1.5 | G3/4 " X14 | | | 23 | 14.5 | 52.5 | |
| S1QG-33-16 | M33X2 | G1 " X11 | | | 26 | 18.6 | 60 | |
| S1QG-36-16 | M36X2 | G1 " X11 | | | 26 | 18.6 | 60 | 41 |
| S1QG-45-20 | M45X2 | G1.1/4 " X11 | | | 28.5 | 18.6 | 66.5 | |

注:若需配挡圈请在代号后加“DQ”，如 S1QG-27-12DQ

Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our part NO,for example S1QG-27-12DQ


S1Q



公制外螺纹74° 外锥
METRIC MALE 74° CONE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------------|----|------|------|-------------|
| | T1 | T2 | L | L1 | L2 | S1 | |
| S1Q-10 | M10X1 | M10X1 | | 30 | 12.5 | 12.5 | 35 |
| S1Q-12 | M12X1.5 | M12X1.5 | | 37 | 16 | 16 | |
| S1Q-14 | M14X1.5 | M14X1.5 | | 42 | 18 | 18 | |
| S1Q-16 | M16X1.5 | M16X1.5 | | 44 | 19 | 19 | |
| S1Q-18 | M18X1.5 | M18X1.5 | | 45 | 19 | 19 | 25 |
| S1Q-22 | M22X1.5 | M22X1.5 | | 46 | 19.5 | 19.5 | |
| S1Q-24 | M24X1.5 | M24X1.5 | | 48 | 20 | 20 | |
| S1Q-27 | M27X1.5 | M27X1.5 | | 49 | 20.5 | 20.5 | |
| S1Q-30 | M30X1.5 | M30X1.5 | | 57 | 23 | 23 | 20 |
| S1Q-30E | M30X2 | M30X2 | | 62 | 26 | 26 | |
| S1Q-33 | M33X2 | M33X2 | | 62 | 26 | 26 | |
| S1Q-36 | M36X2 | M36X2 | | 62 | 26 | 26 | |
| S1Q-39 | M39X2 | M39X2 | | 67 | 27.5 | 27.5 | 16 |
| S1Q-42 | M42X2 | M42X2 | | 69 | 28.5 | 28.5 | |
| S1Q-45 | M45X2 | M45X2 | | 69 | 28.5 | 28.5 | |

S1QG9-0G




90° 弯 公制外螺纹74° 外锥/英管外螺纹O型圈可调向柱端
90° METRIC MALE 74° CONE / BSP MALE O-RING ADJUSTABLE STUD END

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 压力等级 Mpa |
|----------------|-----------|--------------|---------------|----|------|------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | |
| S1QG9-14-04OG | M14X1.5 | G1/4 " X19 | | | 28.5 | 31.3 | 31.5 |
| S1QG9-16-06OG | M16X1.5 | G3/8 " X19 | | | 30.5 | 35.8 | |
| S1QG9-18-06OG | M18X1.5 | G3/8 " X19 | | | 31.5 | 36.8 | |
| S1QG9-18-08OG | M18X1.5 | G1/2 " X14 | | | 34 | 43.2 | |
| S1QG9-22-08OG | M22X1.5 | G1/2 " X14 | | | 34 | 43.2 | 27 |
| S1QG9-27-12OG | M27X1.5 | G3/4 " X14 | | | 37.5 | 49.3 | |
| S1QG9-30-12OG | M30X1.5 | G3/4 " X14 | | | 42.8 | 52 | |
| S1QG9-33-16OG | M33X2 | G1 " X11 | | | 45.5 | 58 | |
| S1QG9-36-16OG | M36X2 | G1 " X11 | | | 47 | 58 | 41 |
| S1QG9-45-20OG | M45X2 | G1.1/4 " X11 | | | 54 | 63 | |

注:若需配挡圈请在代号后加“DQ”，如 S1QG9-27-12OGDQ

Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our part NO,for example S1QG9-27-12OGDQ

S1QH

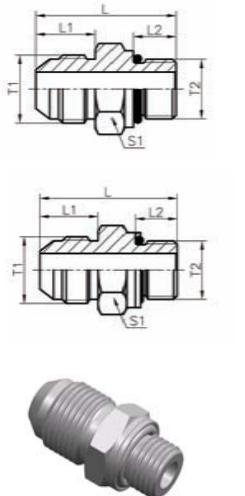


公制外螺纹 74° 外锥/公制外螺纹可调向柱端轻系列 ISO 6149-3
METRIC MALE 74° CONE / METIRC MALE ADJUSTABLE STUD END L-SERIES ISO 6149-3

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------------|------|------|----|-------------|
| | T1 | T2 | L | L1 | L2 | S1 | |
| S1QH-14-12 | M14X1.5 | M12X1.5 | 36.5 | 18 | 11 | 17 | 31.5 |
| S1QH-16-14 | M16X1.5 | M14X1.5 | 37.5 | 19 | 11 | 19 | |
| S1QH-18-16 | M18X1.5 | M16X1.5 | 38 | 19 | 11.5 | 22 | 25 |
| S1QH-22-18 | M22X1.5 | M18X1.5 | 40.5 | 19.5 | 12.5 | 24 | |
| S1QH-27-22 | M27X1.5 | M22X1.5 | 44 | 20.5 | 13 | 27 | 20 |
| S1QH-30-27 | M30X1.5 | M27X2 | 50 | 23 | 16 | 32 | |
| S1QH-33-27 | M33X2 | M27X2 | 53 | 26 | 16 | 34 | 16 |
| S1QH-36-33 | M36X2 | M33X2 | 55 | 26 | 16 | 41 | |
| S1QH-39-33 | M39X2 | M33X2 | 55 | 27.5 | 16 | 41 | |
| S1QH-45-42 | M45X2 | M42X2 | 59.5 | 28.5 | 16 | 50 | 12.5 |

注:若需配挡圈请在代号后加“DQ”，如S1QH-30-27DQ。
Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our part NO,for example S1QH-30-27DQ

S1QL

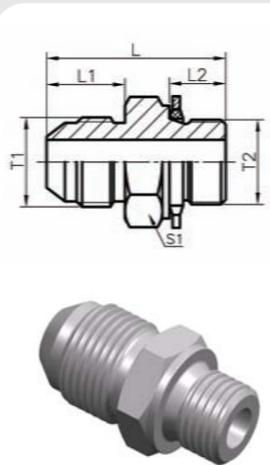

公制外螺纹74° 外锥/公制外螺纹组合垫圈
METRIC MALE 74° CONE/METRIC MALE WITH BONDED SEAL

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa | |
|----------------|-----------|---------|---------------|----|------|----|-------------|----|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1QL-10 | M10X1 | M10X1 | | | 12.5 | 8 | 27 | 17 |
| S1QL-12 | M12X1.5 | M12X1.5 | | | 16 | 12 | 35.2 | 17 |
| S1QL-12-10 | M12X1.5 | M10X1 | | | 16 | 8 | 30.5 | 17 |
| S1QL-14 | M14X1.5 | M14X1.5 | | | 18 | 12 | 36.5 | 19 |
| S1QL-14-10 | M14X1.5 | M10X1 | | | 18 | 8 | 32 | 17 |
| S1QL-14-12 | M14X1.5 | M12X1.5 | | | 18 | 12 | 36.5 | 17 |
| S1QL-14-16 | M14X1.5 | M16X1.5 | | | 18 | 12 | 37 | 22 |
| S1QL-16 | M16X1.5 | M16X1.5 | | | 19 | 12 | 38 | 22 |
| S1QL-16-14 | M16X1.5 | M14X1.5 | | | 19 | 12 | 37 | 19 |
| S1QL-18 | M18X1.5 | M18X1.5 | | | 19 | 12 | 39.5 | 24 |
| S1QL-18-16 | M18X1.5 | M16X1.5 | | | 19 | 12 | 38 | 22 |
| S1QL-22 | M22X1.5 | M22X1.5 | | | 19.5 | 14 | 43.5 | 27 |
| S1QL-22-18 | M22X1.5 | M18X1.5 | | | 19.5 | 12 | 41 | 24 |
| S1QL-27 | M27X1.5 | M27X2 | | | 20.5 | 16 | 49 | 34 |
| S1QL-27-22 | M27X1.5 | M22X1.5 | | | 20.5 | 14 | 44 | 30 |
| S1QL-30-27 | M30X1.5 | M27X2 | | | 23 | 16 | 50 | 34 |
| S1QL-33 | M33X2 | M33X2 | | | 26 | 18 | 57 | 41 |
| S1QL-33-27 | M33X2 | M27X2 | | | 26 | 16 | 55 | 34 |
| S1QL-36-33 | M36X2 | M33X2 | | | 26 | 18 | 58 | 41 |
| S1QL-39-33 | M39X2 | M33X2 | | | 27.5 | 18 | 59 | 41 |
| S1QL-42 | M42X2 | M42X2 | | | 28.5 | 20 | 65.5 | 50 |
| S1QL-45-42 | M45X2 | M42X2 | | | 28.5 | 20 | 65.5 | 50 |


E

E

公制

公制


S1QN

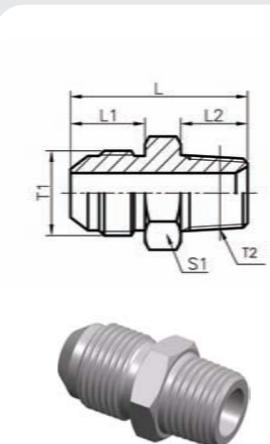

公制外螺纹74° 外锥/布锥管外螺纹
METRIC MALE 74° CONE / NPT MALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa | |
|----------------|-----------|-----------------|---------------|----|------|------|-------------|----|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1QN-12-02 | M12X1.5 | NPT1/8" X27 | | | 16 | 8.5 | 30 | 14 |
| S1QN-12-04 | M12X1.5 | NPT1/4" X18 | | | 16 | 12.5 | 34 | 14 |
| S1QN-14-02 | M14X1.5 | NPT1/8" X27 | | | 18 | 8.5 | 32 | 17 |
| S1QN-14-04 | M14X1.5 | NPT1/4" X18 | | | 18 | 12.5 | 36 | 17 |
| S1QN-16-04 | M16X1.5 | NPT1/4" X18 | | | 19 | 12.5 | 37 | 19 |
| S1QN-16-06 | M16X1.5 | NPT3/8" X18 | | | 19 | 13 | 37.5 | 19 |
| S1QN-18-04 | M18X1.5 | NPT1/4" X18 | | | 19 | 12.5 | 37 | 19 |
| S1QN-18-06 | M18X1.5 | NPT3/8" X18 | | | 19 | 13 | 38.5 | 19 |
| S1QN-18-08 | M18X1.5 | NPT1/2" X14 | | | 19 | 17 | 42.5 | 24 |
| S1QN-22-06 | M22X1.5 | NPT3/8" X18 | | | 19.5 | 13 | 39 | 24 |
| S1QN-22-08 | M22X1.5 | NPT1/2" X14 | | | 19.5 | 17 | 43 | 24 |
| S1QN-27-06 | M27X1.5 | NPT3/8" X18 | | | 20.5 | 13 | 41 | 30 |
| S1QN-27-08 | M27X1.5 | NPT1/2" X14 | | | 20.5 | 17 | 45 | 30 |
| S1QN-27-12 | M27X1.5 | NPT3/4" X14 | | | 20.5 | 18 | 46 | 30 |
| S1QN-27-16 | M27X1.5 | NPT1" X11.5 | | | 20.5 | 21.5 | 52 | 36 |
| S1QN-30-12 | M30X1.5 | NPT3/4" X14 | | | 23 | 18 | 49 | 32 |
| S1QN-33-12 | M33X2 | NPT3/4" X14 | | | 26 | 18 | 52 | 36 |
| S1QN-36-16 | M36X2 | NPT1" X11.5 | | | 26 | 21.5 | 57.5 | 41 |
| S1QN-39-16 | M39X2 | NPT1" X11.5 | | | 27.5 | 21.5 | 60 | 41 |
| S1QN-45-16 | M45X2 | NPT1" X11.5 | | | 28.5 | 21.5 | 62 | 46 |
| S1QN-45-20 | M45X2 | NPT1.1/2" X11.5 | | | 28.5 | 24 | 64.5 | 46 |
| S1QN-45-24 | M45X2 | NPT1.1/2" X11.5 | | | 28.5 | 27.5 | 68 | 50 |
| S1QN-52-20 | M52X2 | NPT1.1/4" X11.5 | | | 30 | 24 | 66 | 55 |


S1QN4

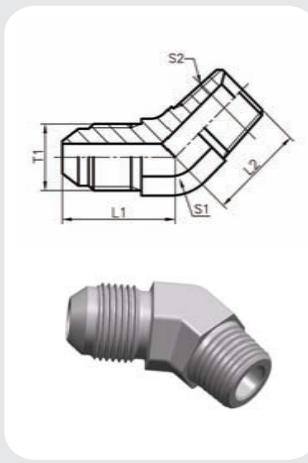

45°弯制外螺纹74°外锥/布锥管外螺纹
45° METRIC MALE 74° CONE / NPT MALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|-----------------|---------------|------|----|----|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | |
| S1QN4-12-02 | M12X1.5 | NPT1/8" X27 | | 23 | 17 | 11 | 34.5 |
| S1QN4-14-02 | M14X1.5 | NPT1/8" X27 | | 24 | 18 | 14 | |
| S1QN4-14-04 | M14X1.5 | NPT1/4" X18 | | 24 | 21 | 14 | 27.5 |
| S1QN4-16-06 | M16X1.5 | NPT3/8" X18 | | 26 | 24 | 16 | |
| S1QN4-18-06 | M18X1.5 | NPT3/8" X18 | | 28 | 24 | 19 | 21 |
| S1QN4-22-08 | M22X1.5 | NPT1/2" X14 | 30.5 | 29.5 | 22 | | |
| S1QN4-27-08 | M27X1.5 | NPT1/2" X14 | 33 | 31 | 27 | | |
| S1QN4-27-12 | M27X1.5 | NPT3/4" X14 | 33 | 35 | 27 | | 17 |
| S1QN4-30-12 | M30X1.5 | NPT3/4" X14 | 36.2 | 35.5 | 30 | | |
| S1QN4-36-16 | M36X2 | NPT1" X11.5 | 42 | 41 | 36 | | 14 |
| S1QN4-39-16 | M39X2 | NPT1" X11.5 | 44.5 | 42.5 | 41 | | 12.5 |
| S1QN4-45-20 | M45X2 | NPT1.1/4" X11.5 | 47 | 43 | 46 | | 8 |

S1QO

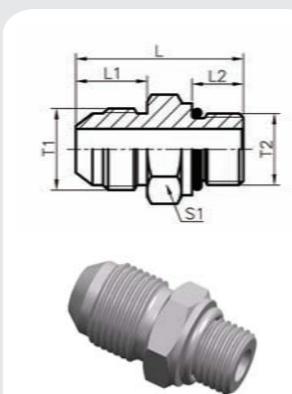


公制外螺纹74°外锥/SAE外螺纹带O型圈轻系列ISO 11926-3

METRIC MALE 74° CONE / SAE O-RING BOSS L-SERIES ISO 11926-3

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|-------------|---------------|----|------|------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | |
| S1QO-16-06 | M16X1.5 | 9/16" X18 | | | 19 | 9.9 | 35 |
| S1QO-18-08 | M18X1.5 | 3/4" X16 | | | 19 | 11.1 | 37 |
| S1QO-22-10 | M18X1.5 | 7/8" X14 | | | 19.5 | 12.7 | 42 |
| S1QO-27-12 | M22X1.5 | 1.1/16" X12 | | | 20.5 | 15.1 | 46 |
| S1QO-30-12 | M27X1.5 | 1.1/16" X12 | | | 23 | 15.1 | 49 |
| S1QO-33-16 | M30X1.5 | 1.5/16" X12 | | | 26 | 15.1 | 54 |
| S1QO-39-16 | M36X2 | 1.5/16" X12 | | | 27.5 | 15.1 | 58 |
| S1QO-42-20 | M45X2 | 1.5/8" X12 | | | 28.5 | 15.1 | 50 |


S1QN9

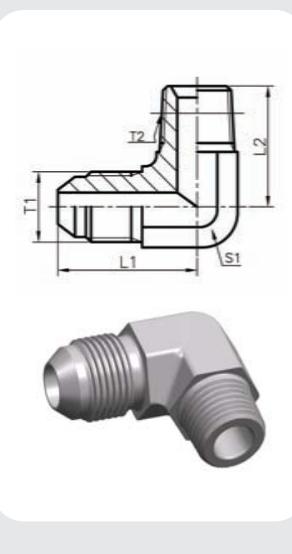

90°弯制外螺纹74°外锥/布锥管外螺纹
90° METRIC MALE 74° CONE / NPT MALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|-----------------|---------------|------|----|----|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | |
| S1QN9-12-02 | M12X1.5 | NPT1/8" X27 | 24 | 24 | 11 | | 34.5 |
| S1QN9-12-04 | M12X1.5 | NPT1/4" X18 | 25 | 25.5 | 14 | | 27.5 |
| S1QN9-14-02 | M14X1.5 | NPT1/8" X27 | 28.5 | 23.5 | 14 | | 34.5 |
| S1QN9-14-04 | M14X1.5 | NPT1/4" X18 | 28.5 | 28.5 | 14 | | 27.5 |
| S1QN9-16-04 | M16X1.5 | NPT1/4" X18 | 30.5 | 30.5 | 16 | | 25 |
| S1QN9-16-06 | M16X1.5 | NPT3/8" X18 | 30.5 | 30.5 | 16 | | |
| S1QN9-16-08 | M16X1.5 | NPT1/2" X14 | 34 | 34 | 22 | | |
| S1QN9-18-04 | M18X1.5 | NPT1/4" X18 | 31.5 | 28.7 | 19 | | 25 |
| S1QN9-18-06 | M18X1.5 | NPT3/8" X18 | 31.5 | 31.5 | 19 | | 21 |
| S1QN9-22-06 | M22X1.5 | NPT3/8" X18 | 34 | 34 | 22 | | |
| S1QN9-22-08 | M22X1.5 | NPT1/2" X14 | 35.5 | 35.5 | 22 | | 20 |
| S1QN9-27-08 | M27X1.5 | NPT1/2" X14 | 37.5 | 37.5 | 27 | | |
| S1QN9-27-12 | M27X1.5 | NPT3/4" X14 | 37.5 | 43 | 27 | | 17 |
| S1QN9-27-16 | M27X1.5 | NPT1" X11.5 | 43 | 47 | 33 | | 14 |
| S1QN9-30-12 | M30X1.5 | NPT3/4" X14 | 43 | 43 | 30 | | 17 |
| S1QN9-36-16 | M36X2 | NPT1" X11.5 | 47 | 47 | 36 | | 14 |
| S1QN9-39-16 | M39X2 | NPT1" X11.5 | 50 | 50 | 41 | | 12.5 |
| S1QN9-42-20 | M42X2 | NPT1.1/4" X11.5 | 52.5 | 52.5 | 41 | | 8 |
| S1QN-45-16 | M45X2 | NPT1" X11.5 | 54 | 54 | 46 | | 10 |
| S1QN-45-20 | M45X2 | NPT1.1/4" X11.5 | 54 | 54 | 46 | | 8 |
| S1QN-52-24 | M52X2 | NPT1.1/2" X11.5 | 54 | 63 | 46 | | 7 |


S1QO9-OG

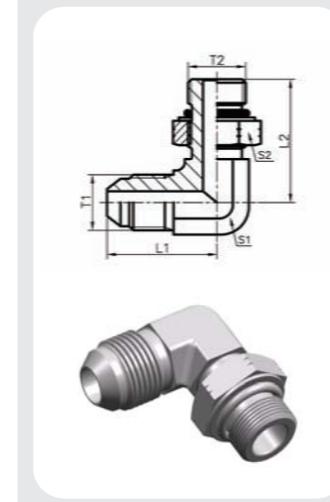

90°弯公制外螺纹74°外锥/SAE外螺纹带O型圈轻系列ISO 11926-3
90° METRIC MALE 74° CONE / SAE O-RING BOSS L-SERIES ISO 11926-3

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|-------------|---------------|----|------|------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | |
| S1QO9-16-06OG | M16X1.5 | 9/16" X18 | | | 30.5 | 31.8 | 17 |
| S1QO9-18-08OG | M18X1.5 | 3/4" X16 | | | 31.5 | 36.8 | 22 |
| S1QO9-22-10OG | M18X1.5 | 7/8" X14 | | | 34 | 44 | 27 |
| S1QO9-27-12OG | M22X1.5 | 1.1/16" X12 | | | 37.5 | 51 | 32 |
| S1QO9-30-12OG | M27X1.5 | 1.1/16" X12 | | | 42.8 | 53 | 30 |
| S1QO9-33-16OG | M30X1.5 | 1.5/16" X12 | | | 47 | 54.5 | 41 |
| S1QO9-39-16OG | M36X2 | 1.5/16" X12 | | | 50 | 59.5 | 41 |
| S1QO9-42-20OG | M45X2 | 1.5/8" X12 | | | 52.5 | 59 | 50 |


S1QT-SP

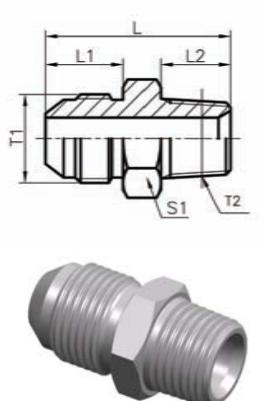

公制外螺纹 74°外锥/英锥管外螺纹 60° 内锥
METRIC MALE 74° CONE/BSPT MALE 60° CONE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|--------------|--|---------------|------|------|----|-------------|
| | T1 | T2 | | L1 | L2 | L | S1 | |
| S1QT-10-02SP | M10X1 | R1/8 " X28 | | 12.5 | 8.5 | 26.5 | 12 | 34.5 |
| S1QT-14-04SP | M14X1.5 | R1/4 " X19 | | 18 | 12.5 | 36 | 17 | |
| S1QT-14-06SP | M14X1.5 | R3/8 " X19 | | 18 | 13 | 37 | 17 | |
| S1QT-16-04SP | M16X1.5 | R1/4 " X19 | | 19 | 12.5 | 37 | 19 | |
| S1QT-16-06SP | M16X1.5 | R3/8 " X19 | | 19 | 13 | 38 | 19 | |
| S1QT-18-04SP | M18X1.5 | R1/4 " X19 | | 19 | 12.5 | 38.5 | 19 | |
| S1QT-18-06SP | M18X1.5 | R3/8 " X19 | | 19 | 13 | 38.5 | 22 | |
| S1QT-22-08SP | M22X1.5 | R1/2 " X14 | | 19.5 | 17 | 44.5 | 24 | |
| S1QT-27-08SP | M27X1.5 | R1/2 " X14 | | 20.5 | 17 | 45 | 30 | |
| S1QT-27-12SP | M27X1.5 | R3/4 " X14 | | 20.5 | 18 | 46 | 30 | |
| S1QT-30-12SP | M30X1.5 | R3/4 " X14 | | 23 | 18 | 50 | 32 | 20 |
| S1QT-33-12SP | M33X2 | R3/4 " X14 | | 26 | 18 | 52 | 34 | |
| S1TQ-36-16SP | M36X2 | R1 " X11 | | 26 | 21.5 | 57.5 | 41 | |
| S1QT-39-16SP | M39X2 | R1 " X11 | | 27.5 | 21.5 | 60 | 41 | |
| S1QT-45-20SP | M45X2 | R1.1/4 " X11 | | 28.5 | 24 | 64.5 | 46 | |
| | | | | | | | | 12.5 |
| | | | | | | | | 10 |


S2Q9



90°弯 公制外螺纹 74°外锥/公制内螺纹 74°内锥
90° METRIC MALE 74°CONE/METRIC FEMALE 74°SEAT

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|--|---------------|--|------|----|-------------|
| | T1 | T2 | | L1 | | S1 | S2 | |
| S2Q9-14 | M14X1.5 | M14X1.5 | | | | 28.5 | | 35 |
| S2Q9-16 | M16X1.5 | M16X1.5 | | | | 30.5 | | |
| S2Q9-18 | M18X1.5 | M18X1.5 | | | | 31.5 | | |
| S2Q9-22 | M22X1.5 | M22X1.5 | | | | 34 | | |
| S2Q9-27 | M27X1.5 | M27X1.5 | | | | 37.5 | | |
| S2Q9-30 | M30X1.5 | M30X1.5 | | | | 42.8 | | |
| S2Q9-33 | M33X2 | M33X2 | | | | 45.5 | | |
| S2Q9-36 | M36X2 | M36X2 | | | | 47 | | |
| S2Q9-39 | M39X2 | M39X2 | | | | 50 | | |
| S2Q9-45 | M45X2 | M45X2 | | | | 54 | | |


S1QT9-SP

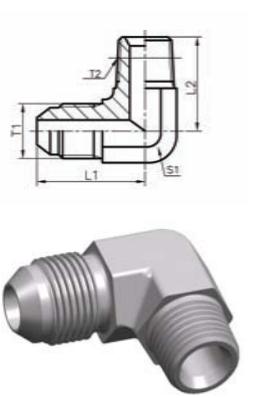

90°弯 公制外螺纹 74°外锥/英锥管外螺纹 60°内锥
90° METRIC MALE 74°CONE / BSPT MALE 60° CONE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|--------------|--|---------------|------|----|--|-------------|
| | T1 | T2 | | L1 | L2 | S1 | | |
| S1QT9-14-04SP | M14X1.5 | R1/4 " X19 | | 28.5 | 28.5 | 14 | | 34.5 |
| S1QT9-16-04SP | M16X1.5 | R1/4 " X19 | | 30.5 | 30.5 | 16 | | |
| S1QT9-18-06SP | M18X1.5 | R3/8 " X19 | | 31.5 | 31.5 | 19 | | |
| S1QT9-18-08SP | M18X1.5 | R1/2 " X14 | | 35.5 | 35.5 | 22 | | |
| S1QT9-22-08SP | M22X1.5 | R1/2 " X14 | | 35.5 | 35.5 | 22 | | |
| S1QT9-27-08SP | M27X1.5 | R1/2 " X14 | | 37.5 | 37.5 | 27 | | |
| S1QT9-27-12SP | M27X1.5 | R3/4 " X14 | | 41.5 | 44 | 27 | | |
| S1QT9-30-12SP | M30X2 | R3/4 " X14 | | 43 | 43 | 30 | | |
| S1QT9-33-12SP | M33X2 | R3/4 " X14 | | 45.5 | 45.5 | 33 | | |
| S1TQ9-36-16SP | M36X2 | R1 " X11 | | 47 | 47 | 36 | | |
| S1QT9-39-16SP | M39X2 | R1 " X11 | | 50 | 50 | 41 | | 12.5 |
| S1QT9-45-20SP | M45X2 | R1.1/4 " X11 | | 54 | 54 | 46 | | 10 |


S4Q

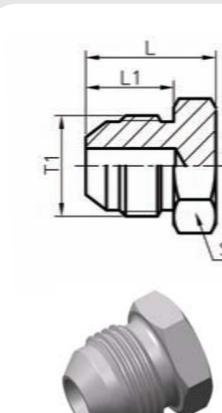

公制外螺纹 74° 外锥堵头
METRIC MALE 74°CONE PLUG

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|--|--|---------------|------|------|----|-------------|
| | T1 | | | L | L1 | | S1 | |
| S4Q-10 | M10X1 | | | | 18 | 12.5 | | 35 |
| S4Q-12 | M12X1.5 | | | | 21.5 | 16 | | |
| S4Q-14 | M14X1.5 | | | | 23 | 18 | | |
| S4Q-16 | M16X1.5 | | | | 24 | 19 | | |
| S4Q-18 | M18X1.5 | | | | 24 | 19 | | |
| S4Q-22 | M22X1.5 | | | | 27.5 | 19.5 | | |
| S4Q-24 | M24X1.5 | | | | 30 | 20 | | |
| S4Q-27 | M27X1.5 | | | | 30 | 20.5 | | |
| S4Q-30 | M30X1.5 | | | | 34 | 23 | | |
| S4Q-30E | M30X2 | | | | 37 | 26 | | |
| S4Q-33 | M33X2 | | | | 37 | 26 | | 32 |
| S4Q-36 | M36X2 | | | | 38 | 26 | | 41 |
| S4Q-39 | M39X2 | | | | 39 | 27.5 | | 46 |
| S4Q-42 | M42X2 | | | | 41.5 | 28.5 | | 12.5 |
| S4Q-45 | M45X2 | | | | 41.5 | 28.5 | | 10 |


S6Q-LN

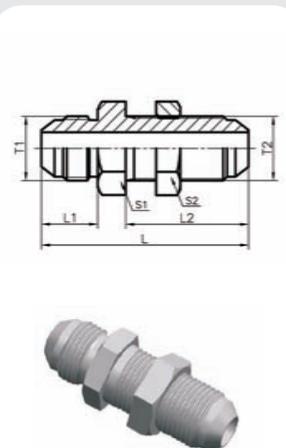

公制外螺纹 74° 外锥过板接头
METRIC MALE 74°CONE BULKHEAD

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------------|-------|------|----|----|-------------|
| | T1 | T2 | L | L1 | L2 | S1 | S2 | |
| S6Q-10LN | M10X1 | M10X1 | | 51.5 | 12.5 | 34 | 14 | 14 |
| S6Q-12LN | M12X1.25 | M12X1.5 | | 60 | 16 | 38 | 14 | 17 |
| S6Q-14LN | M14X1.5 | M14X1.5 | | 64 | 18 | 40 | 17 | 19 |
| S6Q-16LN | M16X1.5 | M16X1.5 | | 66 | 19 | 41 | 19 | 22 |
| S6Q-18LN | M18X1.5 | M18X1.5 | | 68 | 19 | 43 | 22 | 24 |
| S6Q-22LN | M22X1.5 | M22X1.5 | | 69.5 | 19.5 | 44 | 27 | 27 |
| S6Q-24LN | M24X1.5 | M24X1.5 | | 73 | 20 | 45 | 30 | 30 |
| S6Q-27LN | M27X1.5 | M27X1.5 | | 76.5 | 20.5 | 48 | 32 | 32 |
| S6Q-30LN | M30X1.5 | M30X1.5 | | 87 | 23 | 53 | 36 | 36 |
| S6Q-33LN | M33X2 | M33X2 | | 90 | 26 | 55 | 41 | 36 |
| S6Q-36LN | M36X2 | M36X2 | | 93 | 26 | 56 | 41 | 41 |
| S6Q-39LN | M39X2 | M39X2 | | 97.5 | 27.5 | 58 | 46 | 46 |
| S6Q-42LN | M42X2 | M42X2 | | 100.5 | 28.5 | 59 | 50 | 50 |
| S6Q-45LN | M45X2 | M45X2 | | 102.5 | 28.5 | 60 | 50 | 50 |
| | | | | | | | | 10 |


S6Q9-LN

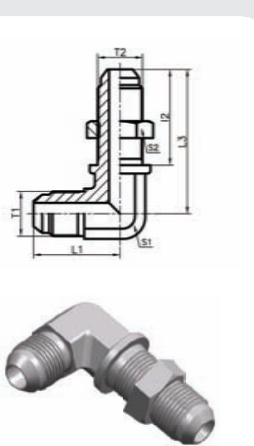

90° 弯 公制外螺纹 74° 外锥过板接头
90° METRIC MALE 74°CONE BULKHEAD

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------------|------|----|----|----|-------------|
| | T1 | T2 | L1 | L2 | L3 | S1 | | |
| S6Q9-12LN | M12X1.5 | M12X1.5 | | 24 | 38 | 52 | 11 | 35 |
| S6Q9-14LN | M14X1.5 | M14X1.5 | | 28.5 | 40 | 56 | 14 | |
| S6Q9-16LN | M16X1.5 | M16X1.5 | | 30.5 | 41 | 58 | 16 | |
| S6Q9-18LN | M18X1.5 | M18X1.5 | | 31.5 | 43 | 62 | 19 | |
| S6Q9-22LN | M22X1.5 | M22X1.5 | | 34 | 44 | 64 | 22 | |
| S6Q9-27LN | M27X1.5 | M27X1.5 | | 37.5 | 48 | 72 | 27 | |
| S6Q9-30LN | M30X1.5 | M30X1.5 | | 42.8 | 53 | 78 | 30 | 20 |
| S6Q9-33LN | M33X2 | M33X2 | | 45.5 | 55 | 82 | 33 | |
| S6Q9-36LN | M36X2 | M36X2 | | 47 | 56 | 86 | 36 | |
| S6Q9-39LN | M39X2 | M39X2 | | 50 | 58 | 88 | 41 | |
| S6Q9-42LN | M42X2 | M42X2 | | 52.5 | 59 | 95 | 41 | |
| S6Q9-45LN | M45X2 | M45X2 | | 54 | 60 | 96 | 46 | 10 |

SAQ



公制外螺纹74° 外锥三通接头
METRIC MALE 74°CONE TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------|---------------|------|------|----|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | |
| SAQ-14 | M14X1.5 | M14X1.5 | M14X1.5 | 28.5 | 28.5 | 28.5 | | 14 |
| SAQ-16 | M16X1.5 | M16X1.5 | M16X1.5 | 30.5 | 30.5 | 30.5 | | 16 |
| SAQ-18 | M18X1.5 | M18X1.5 | M18X1.5 | 31.5 | 31.5 | 31.5 | | 19 |
| SAQ-22 | M22X1.5 | M22X1.5 | M22X1.5 | 34 | 34 | 34 | | 22 |
| SAQ-27 | M27X1.5 | M27X1.5 | M27X1.5 | 37.5 | 37.5 | 37.5 | | 27 |
| SAQ-30 | M30X1.5 | M30X1.5 | M30X1.5 | 42.8 | 42.8 | 42.8 | | 30 |
| SAQ-33 | M33X2 | M33X2 | M33X2 | 45.5 | 45.5 | 45.5 | | 33 |
| | | | | | | | | 16 |


公制外螺纹74° 外锥/公制外螺纹可调向柱端轻系列 ISO 6149-3分支三通
METRIC MALE 74° CONE

/ METIRC MALE ADJUSTABLE STUD END L-SERIES ISO 6149-3 BRANCH TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|------------------|-----------|---------|---------|---------------|------|----|----|-------------|
| | T1 | T2 | T3 | L1,L3 | L2 | S1 | S2 | |
| SAQHQ-14-12-14OG | M14X1.5 | M12X1.5 | M14X1.5 | 28.5 | 31 | 14 | 17 | 31.5 |
| SAQHQ-16-14-16OG | M16X1.5 | M14X1.5 | M16X1.5 | 30.5 | 31 | 16 | 19 | 25 |
| SAQHQ-18-16-18OG | M18X1.5 | M16X1.5 | M18X1.5 | 31.5 | 33.5 | 19 | 22 | |
| SAQHQ-22-18-22OG | M22X1.5 | M18X1.5 | M22X1.5 | 34 | 37.5 | 22 | 24 | |
| SAQHQ-27-22-27OG | M27X1.5 | M22X1.5 | M27X1.5 | 37.5 | 41.5 | 27 | 27 | |
| SAQHQ-30-27-30OG | M30X1.5 | M27X2 | M30X1.5 | 42.8 | 48.5 | 30 | 32 | |
| SAQHQ-33-27-33OG | M33X2 | M27X2 | M33X2 | 45.5 | 48.5 | 33 | 32 | 16 |
| SAQHQ-36-33-36OG | M36X2 | M33X2 | M36X2 | 47 | 51.5 | 36 | 41 | |
| SAQHQ-39-33-39OG | M39X2 | M33X2 | M39X2 | 50 | 51.5 | 41 | 41 | |
| SAQHQ-45-42-45OG | M45X2 | M42X2 | M45X2 | 54 | 56.5 | 46 | 50 | |
| | | | | | | | | 10 |

注:若需配挡圈请在代号后加“DQ”，如 SAQHQ-30-27-30OGDQ
Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our part NO,for example SAQHQ-30-27-30OGDQ

SAQQH-OG

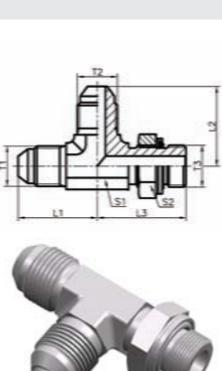

公制外螺纹74° 外锥/公制外螺纹可调向柱端轻系列 ISO 6149-3主支三通
METRIC MALE 74° CONE / METIRC MALE ADJUSTABLE STUD END L-SERIES ISO 6149-3 RUN TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|------------------|-----------|---------|---------|---------------|------|----|----|-------------|
| | T1 | T2 | T3 | L1,L2 | L3 | S1 | S2 | |
| SAQQH-14-14-12OG | M14X1.5 | M14X1.5 | M12X1.5 | 28.5 | 31 | 14 | 17 | 31.5 |
| SAQQH-16-16-14OG | M16X1.5 | M16X1.5 | M14X1.5 | 30.5 | 31 | 16 | 19 | 25 |
| SAQQH-18-18-16OG | M18X1.5 | M18X1.5 | M16X1.5 | 31.5 | 33.5 | 19 | 22 | |
| SAQQH-22-22-18OG | M22X1.5 | M22X1.5 | M18X1.5 | 34 | 37.5 | 22 | 24 | |
| SAQQH-27-27-22OG | M27X1.5 | M27X1.5 | M22X1.5 | 37.5 | 41.5 | 2 | | |


E

公制

E

公制


S1K



日本公制外螺纹 60° 外锥
JIS METRIC MALE 60° CONE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------------|----|------|------|-------------|
| | T1 | T2 | L1 | L2 | L3 | S1 | |
| S1K-14 | M14X1.5 | M14X1.5 | | 40 | 17 | | 34.5 |
| S1K-16 | M16X1.5 | M16X1.5 | | 42 | 18 | 18 | |
| S1K-18 | M18X1.5 | M18X1.5 | | 42 | 18 | 18 | |
| S1K-20 | M20X1.5 | M20X1.5 | | 48 | 20 | 20 | |
| S1K-22 | M22X1.5 | M22X1.5 | | 48 | 20 | 20 | |
| S1K-24 | M24X1.5 | M24X1.5 | | 53 | 21.5 | 21.5 | |
| S1K-30 | M30X1.5 | M30X1.5 | | 63 | 26 | 26 | |
| S1K-33 | M33X1.5 | M33X1.5 | | 71 | 30 | 30 | |
| S1K-36 | M36X1.5 | M36X1.5 | | 79 | 33 | 33 | 20.5 |
| S1K-42 | M42X1.5 | M42X1.5 | | 85 | 36 | 36 | 17 |

S1KG




日本公制外螺纹60° 外锥/英管外螺纹O型圈
JIS METRIC MALE 60° CONE/BSP MALE O-RING

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|-----------|---------------|------|----|------|-------------|
| | T1 | T2 | L1 | L2 | L3 | S1 | |
| S1KG-14-04 | M14X1.5 | G1/4" X19 | | 36 | 17 | 11 | 34.5 |
| S1KG-14-06 | M14X1.5 | G3/8" X19 | | 36.5 | 17 | 11.5 | |
| S1KG-16-06 | M16X1.5 | G3/8" X19 | | 38 | 18 | 11.5 | |
| S1KG-18-06 | M18X1.5 | G3/8" X19 | | 38 | 18 | 11.5 | |
| S1KG-22-08 | M22X1.5 | G1/2" X14 | | 47 | 20 | 14 | |
| S1KG-30-12 | M24X1.5 | G3/4" X14 | | 52.5 | 26 | 15.5 | |
| S1KG-33-12 | M30X1.5 | G3/4" X14 | | 59.5 | 30 | 15.5 | |
| S1KG-33-16 | M33X1.5 | G1" X11 | | 62 | 30 | 18 | |

注:若需配挡圈请在代号后加“DQ”，如 S1KG-14-06 DQ。

Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our part NO,for example S1KG-14-06 DQ.

S1KG9-OG




90° 弯日本公制外螺纹60° 外锥/英管外螺纹O型圈可调向柱端
90° JIS METRIC MALE 60° CONE/BSP MALE O-RING ADJUSTABLE STUD END

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|-------------|---------------|------|------|----|-------------|
| | T1 | T2 | L1 | L2 | S1 | | |
| S1KG9-14-04OG | M14X1.5 | G1/4" X19 | | 26.5 | 31.3 | 14 | 31.5 |
| S1KG9-14-06OG | M14X1.5 | G3/8" X19 | | 28.5 | 35.8 | 16 | |
| S1KG9-16-06OG | M16X1.5 | G3/8" X19 | | 29.5 | 35.8 | 16 | |
| S1KG9-18-06OG | M18X1.5 | G3/8" X19 | | 30.8 | 37 | 19 | |
| S1KG9-22-08OG | M22X1.5 | G1/2" X14 | | 35.5 | 43.2 | 22 | |
| S1KG9-24-08OG | M24X1.5 | G1/2" X14 | | 37 | 43.2 | 22 | |
| S1KG9-24-12OG | M24X1.5 | G3/4" X14 | | 40 | 49.3 | 27 | |
| S1KG9-30-12OG | M30X1.5 | G3/4" X14 | | 45 | 53 | 30 | |
| S1KG9-33-16OG | M33X1.5 | G1" X11 | | 50 | 53 | 33 | 16 |
| S1KG9-42-20OG | M42X1.5 | G1.1/4" X11 | | 63 | 59 | 41 | |

注:若需配挡圈请在代号后加“DQ”，如S1KG9-24-12OGDQ。

Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our part NO,for example S1KG9-24-12OGDQ.

S1KH




日本公制外螺纹60° 外锥/公制外螺纹重系列ISO 6149-2
JIS METRIC MALE 60° CONE/METIRC MALE S-SERIES ISO 6149-2

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------------|----|------|------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | |
| S1KH-14-12 | M14X1.5 | M12X1.5 | | | 17 | 11 | 34.5 |
| S1KH-14 | M14X1.5 | M14X1.5 | | | 17 | 11 | |
| S1KH-16-14 | M16X1.5 | M14X1.5 | | | 18 | 11 | |
| S1KH-18-14 | M18X1.5 | M14X1.5 | | | 18 | 11 | |
| S1KH-18-16 | M18X1.5 | M16X1.5 | | | 18 | 12.5 | |
| S1KH-18-20 | M18X1.5 | M20X1.5 | | | 18 | 14 | |
| S1KH-20-18 | M20X1.5 | M18X1.5 | | | 20 | 14 | |
| S1KH-22-20 | M22X1.5 | M20X1.5 | | | 20 | 14 | |
| S1KH-24-20 | M24X1.5 | M20X1.5 | | | 21.5 | 14 | 27.5 |
| S1KH-24-22 | M24X1.5 | M22X1.5 | | | 21.5 | 15 | |
| S1KH-30-27 | M30X1.5 | M27X2 | | | 26 | 18.5 | |
| S1KH-33 | M33X1.5 | M33X2 | | | 30 | 18.5 | 20.5 |
| S1KH-36-33 | M36X1.5 | M33X2 | | | 33 | 18.5 | 17 |

注:若需配挡圈请在代号后加“DQ”，如 S1KH-30-27DQ。

Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our part NO,for example S1KH-30-27DQ.


S1KH9-OG

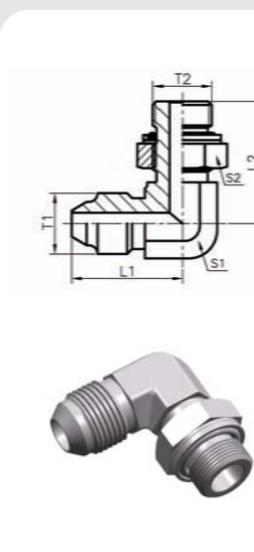

90° 弯日本公制外螺纹60° 外锥/公制外螺纹可调向柱端重系列ISO 6149-2
90° JIS METRIC MALE 60° CONE/METIRC MALE ADJUSTABLE STUD END S-SERIES ISO 6149-2


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|---------|---------------|----|------|------|-------------|
| | T1 | T2 | L1 | L2 | S1 | | |
| S1KH9-14-12OG | M14X1.5 | M12X1.5 | | | 26.5 | 31 | 34.5 |
| S1KH9-14OG | M14X1.5 | M14X1.5 | | | 26.5 | 31 | |
| S1KH9-16-14OG | M16X1.5 | M14X1.5 | | | 29.5 | 31 | |
| S1KH9-18-14OG | M18X1.5 | M14X1.5 | | | 30.8 | 33.5 | |
| S1KH9-18-16OG | M18X1.5 | M16X1.5 | | | 30.8 | 33.5 | |
| S1KH9-18-20OG | M18X1.5 | M20X1.5 | | | 30.8 | 41.5 | |
| S1KH9-20-18OG | M20X1.5 | M18X1.5 | | | 33 | 37.5 | |
| S1KH9-22-20OG | M22X1.5 | M20X1.5 | | | 35 | 41.5 | 22 |
| S1KH9-24-20OG | M24X1.5 | M20X1.5 | | | 37 | 41.5 | 27.5 |
| S1KH9-24-22OG | M24X1.5 | M22X1.5 | | | 37 | 41.5 | |

S1KT-SP

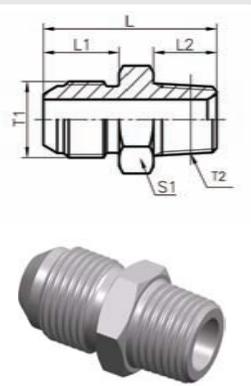


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 工作压力 Mpa |
|----------------|-----------|--------------|--|---------------|-----|------|-----|-------------|
| | T1 | T2 | | L1 | L2 | L | S1 | |
| S1KT-14-04SP | M14X1.5 | R1/4 " X29 | | 17 | 113 | 37.5 | 117 | 34.5 |
| S1KT-14-06SP | M14X1.5 | R3/8 " X19 | | 17 | 15 | 38 | 19 | |
| S1KT-16-06SP | M16X1.5 | R3/8 " X19 | | 18 | 15 | 39 | 19 | |
| S1KT-18-06SP | M18X1.5 | R3/8 " X19 | | 18 | 15 | 39 | 19 | |
| S1KT-20-06SP | M20X1.5 | R3/8 " X19 | | 20 | 15 | 43 | 22 | |
| S1KT-22-06SP | M22X1.5 | R3/8 " X19 | | 20 | 15 | 43 | 24 | |
| S1KT-22-08SP | M22X1.5 | R1/2 " X14 | | 20 | 18 | 48 | 24 | |
| S1KT-24-08SP | M24X1.5 | R1/2 " X14 | | 21.5 | 18 | 51.5 | 27 | |
| S1KT-24-12SP | M24X1.5 | R3/4 " X14 | | 21.5 | 20 | 51.5 | 30 | |
| S1KT-30-12SP | M30X1.5 | R3/4 " X14 | | 26 | 20 | 57 | 32 | |
| S1KT-33-16SP | M33X1.5 | R1 " X11 | | 30 | 22 | 66.5 | 36 | 20.5 |
| S1KT-36-20SP | M36X1.5 | R1.1/4 " X11 | | 33 | 25 | 72.5 | 46 | |
| S1KT-42-24SP | M42X1.5 | R1.1/2 " X11 | | 36 | 25 | 77.5 | 50 | |

S4K

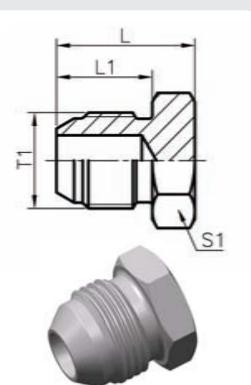


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | 工作压力 Mpa |
|----------------|-----------|--|--|---------------|------|----|-------------|
| | T1 | | | L1 | L | S1 | |
| S4K-14 | M14X1.5 | | | 17 | 23 | 17 | 34.5 |
| S4K-16 | M16X1.5 | | | 18 | 24 | 17 | |
| S4K-18 | M18X1.5 | | | 18 | 25 | 19 | |
| S4K-20 | M20X1.5 | | | 20 | 28 | 22 | |
| S4K-22 | M22X1.5 | | | 20 | 28 | 24 | |
| S4K-24 | M24X1.5 | | | 21.5 | 31.5 | 27 | |
| S4K-30 | M30X1.5 | | | 26 | 37 | 32 | |
| S4K-33 | M33X1.5 | | | 30 | 41 | 36 | 20.5 |

SAK

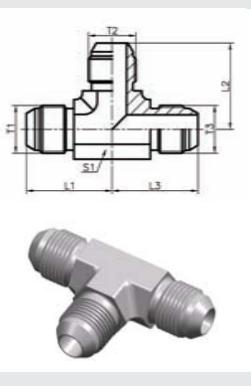


| 日本公制外螺纹 60° 外锥三通 JIS METRIC MALE 60° CONE TEE | | | | | | | |
|--|-----------|---------|---------|---------------|------|------|-------------|
| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | 工作压力 Mpa |
| | T1 | T2 | T3 | L1 | L2 | L3 | |
| SAK-14 | M14X1.5 | M14X1.5 | M14X1.5 | 26.5 | 26.5 | 26.5 | 14 |
| SAK-16 | M16X1.5 | M16X1.5 | M16X1.5 | 29.5 | 29.5 | 29.5 | 16 |
| SAK-18 | M18X1.5 | M18X1.5 | M18X1.5 | 30.8 | 30.8 | 30.8 | 19 |
| SAK-22 | M22X1.5 | M22X1.5 | M22X1.5 | 35.5 | 35.5 | 35.5 | 22 |
| SAK-24 | M24X1.5 | M24X1.5 | M24X1.5 | 37 | 37 | 37 | 22 |
| | | | | | | | 27.5 |
| | | | | | | | |

S4L

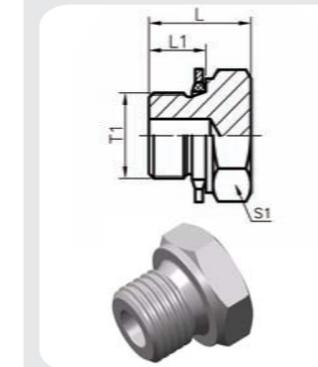


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | 工作压力 Mpa |
|----------------|-----------|--|--|---------------|----|----|-------------|
| | T1 | | | L1 | L | S1 | |
| S4L-10 | M10X1 | | | 8 | 14 | 14 | |
| S4L-12 | M12X1.5 | | | 12 | 19 | 17 | |
| S4L-14 | M14X1.5 | | | 12 | 19 | 19 | |
| S4L-16 | M16X1.5 | | | 12 | 22 | 22 | |
| S4L-18 | M18X1.5 | | | 12 | 22 | 24 | |
| S4L-22 | M22X1.5 | | | 14 | 25 | 27 | |
| S4L-27 | M27X2 | | | 16 | 29 | 34 | |
| S4L-33 | M33X2 | | | 18 | 34 | 41 | |
| S4L-42 | M42X2 | | | 20 | 41 | 50 | |

S4MN-WD

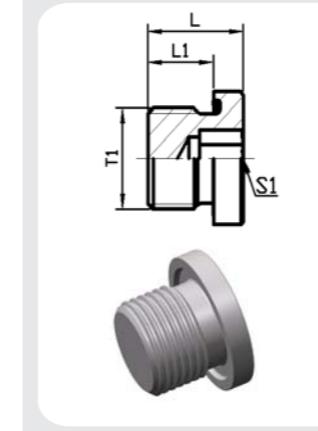

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | 工作压力 Mpa | |
|----------------|-----------|--|--|---------------|--|------|-------------|----|
| | T1 | | | L1 | | L | | |
| S4MN-10WD | M10X1 | | | 8 | | 12.3 | 5 | 50 |
| S4MN-12WD | M12X1.5 | | | 12 | | 17.3 | 6 | |
| S4MN-14WD | M14X1.5 | | | 12 | | 17.3 | 6 | |
| S4MN-16WD | M16X1.5 | | | 12 | | 17.3 | 8 | |
| S4MN-18WD | M18X1.5 | | | 12 | | 17.3 | 8 | |
| S4MN-20WD | M20X1.5 | | | 14 | | 19.3 | 10 | |
| S4MN-22WD | M22X1.5 | | | 14 | | 19.3 | 10 | |
| S4MN-26WD | M26X1.5 | | | 16 | | 21.3 | 12 | |
| S4MN-27WD | M27X2 | | | 16 | | 21.3 | 12 | |
| S4MN-33WD | M33X2 | | | 16 | | 22.8 | 17 | |
| S4MN-42WD | M42X2 | | | 16 | | 22.8 | 22 | |
| S4MN-48WD | M48X2 | | | 16 | | 22.8 | 24 | |


S4H

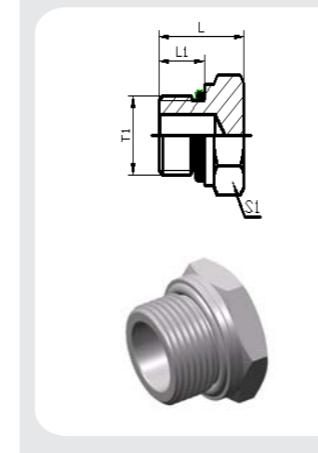


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | 工作压力 Mpa |
|----------------|-----------|--|--|---------------|------|----|-------------|
| | T1 | | | L1 | L | S1 | |
| S4H-12 | M12X1.5 | | | 11 | 19.5 | 17 | 50 |
| S4H-14 | M14X1.5 | | | 11 | 19.5 | 19 | |
| S4H-16 | M16X1.5 | | | 12.5 | 23 | 22 | 42 |
| S4H-18 | M18X1.5 | | | 14 | 24.5 | 24 | |
| S4H-22 | M22X1.5 | | | 15 | 27.5 | 27 | 40 |
| S4H-27 | M27X2 | | | 18.5 | 32 | 32 | 25 |
| S4H-33 | M33X2 | | | 18.5 | 34.5 | 41 | |
| S4H-42 | M42X2 | | | 19 | 37 | 50 | |

注:若需配挡圈请在代号后加“DQ”,如S4H-27DQ。


Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our Part No. for example S4H-27DQ.

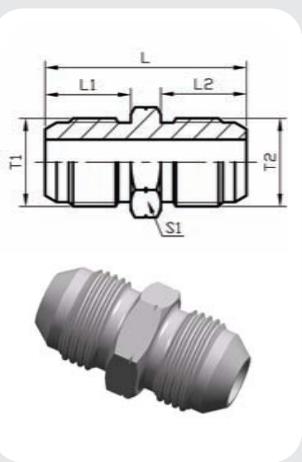S1S日本英管外螺纹60° 外锥
JIS GAS MALE 60° CONE


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | |
|----------------|--------------|--------------|---------------|----|----|----|----|
| | T1 | T2 | L1 | L2 | L | S1 | |
| S1S-02 | G1/8 " X28 | G1/8 " X28 | | 12 | 12 | 30 | 14 |
| S1S-04 | G1/4 " X19 | G1/4 " X19 | | 16 | 16 | 38 | 17 |
| S1S-06 | G3/8 " X19 | G3/8 " X19 | | 18 | 18 | 42 | 19 |
| S1S-08 | G1/2 " X14 | G1/2 " X14 | | 20 | 20 | 48 | 22 |
| S1S-12 | G3/4 " X14 | G3/4 " X14 | | 22 | 22 | 54 | 30 |
| S1S-16 | G1 " X11 | G1 " X11 | | 24 | 24 | 59 | 36 |
| S1S-20 | G1.1/4 " X11 | G1.1/4 " X11 | | 27 | 27 | 67 | 46 |
| S1S-24 | G1.1/2 " X11 | G1.1/2 " X11 | | 27 | 27 | 69 | 50 |
| S1S-32 | G2 " X11 | G2 " X11 | | 30 | 30 | 77 | 65 |

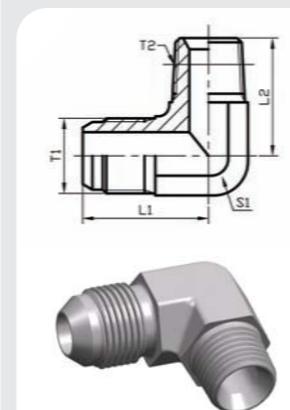E**S1ST9-SP**90° 弯日本英管外螺纹60° 外锥/英锥管外螺纹60° 内锥
90° ELBOW JIS GAS MALE 60° CONE/BSPT MALE 60° SEAT


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | |
|----------------|--------------|--------------|---------------|----|------|----|----|
| | T1 | T2 | L1 | L2 | S1 | | |
| S1ST9-02SP | G1/8 " X28 | R1/8 " X28 | | | 21.8 | 21 | 11 |
| S1ST9-04SP | G1/4 " X19 | R1/4 " X19 | | | 25 | 26 | 14 |
| S1ST9-06SP | G3/8 " X19 | R3/8 " X19 | | | 28 | 30 | 16 |
| S1ST9-08SP | G1/2 " X14 | R1/2 " X14 | | | 32 | 36 | 22 |
| S1ST9-12SP | G3/4 " X14 | R3/4 " X14 | | | 37 | 43 | 27 |
| S1ST9-16SP | G1 " X11 | R1 " X11 | | | 42 | 50 | 33 |
| S1ST9-20SP | G1.1/4 " X11 | R1.1/4 " X11 | | | 50 | 58 | 41 |
| S1ST9-24SP | G1.1/2 " X11 | R1.1/2 " X11 | | | 52 | 63 | 48 |
| S1ST9-32SP | G2 " X11 | R2 " X11 | | | 63 | 75 | 63 |

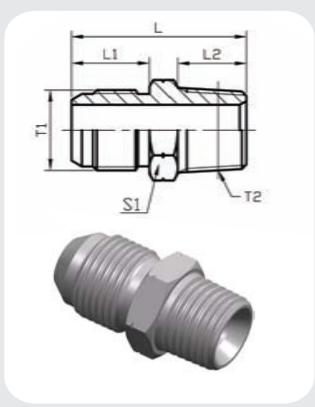E**S1ST-SP**日本英管外螺纹60° 外锥/英锥管外螺纹60° 内锥
JIS GAS MALE 60° SEAT/BSPT MALE 60° SEAT

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | |
|----------------|--------------|--------------|---------------|----|------|------|----|
| | T1 | T2 | L1 | L2 | L | S1 | |
| S1ST-02SP | G1/8 " X28 | R1/8 " X28 | | 12 | 10 | 28 | 14 |
| S1ST-04SP | G1/4 " X19 | R1/4 " X19 | | 16 | 14.5 | 36.5 | 17 |
| S1ST-06SP | G3/8 " X19 | R3/8 " X19 | | 18 | 15 | 39 | 19 |
| S1ST-08SP | G1/2 " X14 | R1/2 " X14 | | 20 | 20 | 48 | 24 |
| S1ST-12SP | G3/4 " X14 | R3/4 " X14 | | 22 | 20 | 53 | 30 |
| S1ST-16SP | G1 " X11 | R1 " X11 | | 24 | 25.5 | 62.5 | 41 |
| S1ST-20SP | G1.1/4 " X11 | R1.1/4 " X11 | | 27 | 26.5 | 66 | 46 |
| S1ST-24SP | G1.1/2 " X11 | R1.1/2 " X11 | | 27 | 26.5 | 67.5 | 50 |
| S1ST-32SP | G2 " X11 | R2 " X11 | | 30 | 30 | 77 | 65 |

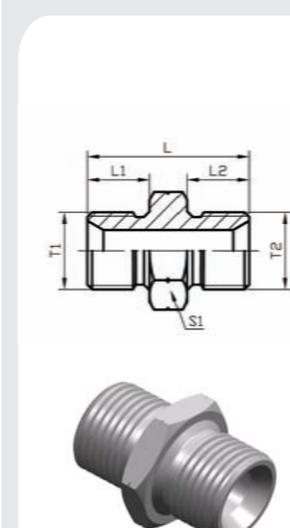
英制**S1B**英管外螺纹60° 内锥
BSP MALE 60° SEAT

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | | |
|----------------|--------------|--------------|---------------|----|------|------|------|----|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1B-02 | G1/8 " X28 | G1/8 " X28 | | | 10 | 10 | 26 | 14 |
| S1B-02-04 | G1/8 " X28 | G1/4 " X19 | | | 10 | 12 | 28 | 19 |
| S1B-04 | G1/4 " X19 | G1/4 " X19 | | | 12 | 12 | 30 | 19 |
| S1B-04-06 | G1/4 " X19 | G3/8 " X19 | | | 12 | 13.5 | 33.5 | 22 |
| S1B-04-08 | G1/4 " X19 | G1/2 " X14 | | | 12 | 16 | 38 | 27 |
| S1B-06 | G3/8 " X19 | G3/8 " X19 | | | 13.5 | 13.5 | 35 | 22 |
| S1B-06-08 | G3/8 " X19 | G1/2 " X14 | | | 13.5 | 16 | 39.5 | 27 |
| S1B-08 | G1/2 " X14 | G1/2 " X14 | | | 16 | 16 | 42 | 27 |
| S1B-08-10 | G1/2 " X14 | G5/8 " X14 | | | 16 | 17.5 | 43.5 | 30 |
| S1B-10 | G5/8 " X14 | G5/8 " X14 | | | 17.5 | 17.5 | 45 | 30 |
| S1B-10-12 | G5/8 " X14 | G3/4 " X14 | | | 17.5 | 18.5 | 47 | 32 |
| S1B-12 | G3/4 " X14 | G3/4 " X14 | | | 18.5 | 18.5 | 48 | 32 |
| S1B-12-16 | G3/4 " X14 | G1 " X11 | | | 18.5 | 20.5 | 52.5 | 41 |
| S1B-12-20 | G3/4 " X14 | G1.1/4 " X11 | | | 18.5 | 20.5 | 53.5 | 50 |
| S1B-16 | G1 " X11 | G1 " X11 | | | 20.5 | 20.5 | 53.5 | 41 |
| S1B-16-20 | G1 " X11 | G1.1/4 " X11 | | | 20.5 | 20.5 | 58 | 50 |
| S1B-16-24 | G1 " X11 | G1.1/2 " X11 | | | 20.5 | 23 | 60.5 | 55 |
| S1B-20 | G1.1/4 " X11 | G1.1/4 " X11 | | | 20.5 | 20.5 | 58 | 50 |
| S1B-20-24 | G1.1/4 " X11 | G1.1/2 " X11 | | | 20.5 | 23 | 60.5 | 55 |
| S1B-24 | G1.1/2 " X11 | G1.1/2 " X11 | | | 23 | 23 | 63 | 55 |
| S1B-24-32 | G1.1/2 " X11 | G2 " X11 | | | 23 | 25.5 | 66.5 | 70 |
| S1B-32 | G2 " X11 | G2 " X11 | | | 25.5 | 25.5 | 69 | 70 |

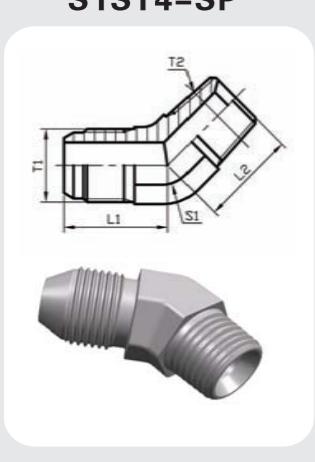英制**S1ST4-SP**45° 弯日本英管外螺纹60° 外锥/英锥管外螺纹60° 内锥
45° ELBOW JIS GAS MALE 60° CONE/BSPT MALE 60° SEAT

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|---------------|----|----|----|
| | T1 | T2 | L1 | L2 | S1 | |
| S1ST4-02SP | G1/8 " X28 | R1/8 " X28 | | 19 | 17 | 11 |
| S1ST4-04SP | G1/4 " X19 | R1/4 " X19 | | 22 | 19 | 14 |
| S1ST4-06SP | G3/8 " X19 | R3/8 " X19 | | 25 | 22 | 16 |
| S1ST4-08SP | G1/2 " X14 | R1/2 " X14 | | 28 | 26 | 22 |
| S1ST4-12SP | G3/4 " X14 | R3/4 " X14 | | 32 | 30 | 27 |
| S1ST4-16SP | G1 " X11 | R1 " X11 | | 36 | 34 | 33 |
| S1ST4-20SP | G1.1/4 " X11 | R1.1/4 " X11 | | 42 | 40 | 41 |
| S1ST4-24SP | G1.1/2 " X11 | R1.1/2 " X11 | | 43 | 41 | 48 |
| S1ST4-32 | | | | | | |

S1B4

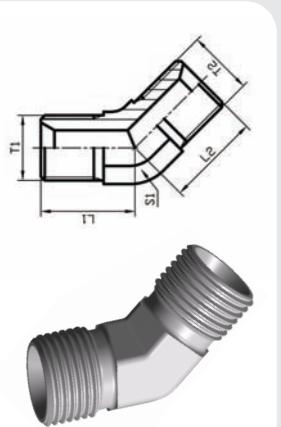


45° 弯头管外螺纹60° 内锥
45° ELBOW BSP MALE 60° SEAT

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|------------|------------|---------------|----|----|----|
| | T1 | T2 | L1 | L2 | S1 | |
| S1B4-02 | G1/8"X28 | G1/8"X28 | | 17 | 17 | 11 |
| S1B4-04 | G1/4"X19 | G1/4"X19 | | 21 | 21 | 14 |
| S1B4-06 | G3/8"X19 | G3/8"X19 | | 24 | 24 | 16 |
| S1B4-08 | G1/2"X14 | G1/2"X14 | | 27 | 27 | 22 |
| S1B4-10 | G5/8"X14 | G5/8"X14 | | 30 | 30 | 22 |
| S1B4-12 | G3/4"X14 | G3/4"X14 | | 32 | 32 | 27 |
| S1B4-16 | G1"X11 | G1"X11 | | 35 | 35 | 33 |
| S1B4-20 | G1.1/4"X11 | G1.1/4"X11 | | 37 | 37 | 41 |
| S1B4-24 | G1.1/2"X11 | G1.1/2"X11 | | 46 | 46 | 48 |
| S1B4-32 | G2"X11 | G2"X11 | | 57 | 57 | 63 |

F

S1B9

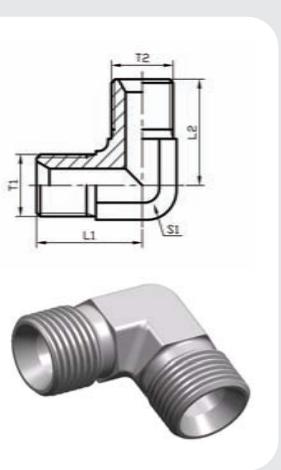


90° 弯 英管外螺纹60° 内锥
90° ELBOW BSPP MALE 60° SEAT

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | |
|----------------|------------|------------|---------------|------|------|----|--|
| | T1 | T2 | L1 | L2 | S1 | | |
| S1B9-02 | G1/8"X28 | G1/8"X28 | | 19.8 | 19.8 | 11 | |
| S1B9-04 | G1/4"X19 | G1/4"X19 | | 24.5 | 24.5 | 14 | |
| S1B9-06 | G3/8"X19 | G3/8"X19 | | 27.5 | 27.5 | 16 | |
| S1B9-08 | G1/2"X14 | G1/2"X14 | | 34.5 | 34.5 | 22 | |
| S1B9-10 | G5/8"X14 | G5/8"X14 | | 38 | 38 | 22 | |
| S1B9-12 | G3/4"X14 | G3/4"X14 | | 40 | 40 | 27 | |
| S1B9-16 | G1"X11 | G1"X11 | | 46 | 46 | 33 | |
| S1B9-20 | G1.1/4"X11 | G1.1/4"X11 | | 50.5 | 50.5 | 41 | |
| S1B9-24 | G1.1/2"X11 | G1.1/2"X11 | | 57.5 | 57.5 | 48 | |

英
生


S2B

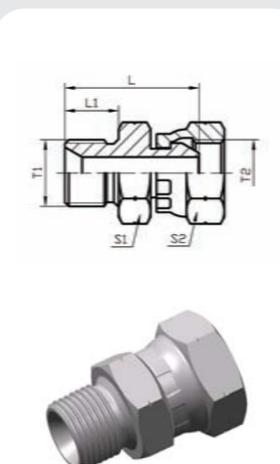

英管外螺纹60° 内锥/英管内螺纹60° 外锥
BSP MALE 60° SEAT/BSP FEMALE 60° CONE


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | |
|----------------|------------|------------|--|---------------|------|----|----|
| | T1 | T2 | | L1 | L | S1 | S2 |
| S2B-04 | G1/4"X19 | G1/4"X19 | | 12 | 29 | 19 | 19 |
| S2B-04-06 | G1/4"X19 | G3/8"X19 | | 12 | 30.5 | 19 | 22 |
| S2B-04-08 | G1/4"X19 | G1/2"X14 | | 12 | 32 | 19 | 27 |
| S2B-06 | G3/8"X19 | G3/8"X19 | | 13.5 | 34 | 22 | 22 |
| S2B-06-04 | G3/8"X19 | G1/4"X19 | | 13.5 | 32.5 | 22 | 19 |
| S2B-06-08 | G3/8"X19 | G1/2"X14 | | 13.5 | 35.5 | 22 | 27 |
| S2B-08 | G1/2"X14 | G1/2"X14 | | 16 | 40 | 27 | 27 |
| S2B-08-06 | G1/2"X14 | G3/8"X19 | | 16 | 38.5 | 27 | 22 |
| S2B-08-12 | G1/2"X14 | G3/4"X14 | | 16 | 41 | 27 | 32 |
| S2B-12 | G3/4"X14 | G3/4"X14 | | 18.5 | 44.5 | 32 | 32 |
| S2B-12-08 | G3/4"X14 | G1/2"X14 | | 18.5 | 43.5 | 32 | 27 |
| S2B-12-16 | G3/4"X14 | G1"X11 | | 18.5 | 46 | 32 | 41 |
| S2B-16 | G1"X11 | G1"X11 | | 20.5 | 50 | 41 | 41 |
| S2B-16-12 | G1"X11 | G3/4"X14 | | 20.5 | 49 | 41 | 32 |
| S2B-16-20 | G1"X11 | G1.1/4"X11 | | 20.5 | 53 | 41 | 50 |
| S2B-20 | G1.1/4"X11 | G1.1/4"X11 | | 20.5 | 55 | 50 | 50 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

S2B4

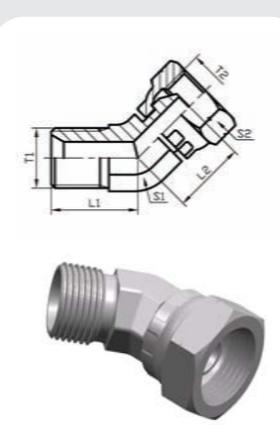


45° 英管外螺纹60° 内锥/英管内螺纹60° 外锥
45° ELBOW BSP MALE 60° SEAT/BSP FEMALE 60° CONE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | |
|----------------|------------|------------|---------------|------|------|----|----|
| | T1 | T2 | L1 | L2 | S1 | S2 | |
| S2B4-04 | G1/4"X19 | G1/4"X19 | | 21 | 15.5 | 14 | 19 |
| S2B4-04-06 | G1/4"X19 | G3/8"X19 | | 21 | 18.5 | 14 | 22 |
| S2B4-06 | G3/8"X19 | G3/8"X19 | | 24 | 18.5 | 16 | 22 |
| S2B4-06-04 | G3/8"X19 | G1/4"X19 | | 24 | 15.5 | 16 | 19 |
| S2B4-08 | G1/2"X14 | G1/2"X14 | | 27 | 22 | 22 | 27 |
| S2B4-08-06 | G1/2"X14 | G3/8"X19 | | 27 | 20.5 | 22 | 22 |
| S2B4-10 | G5/8"X14 | G5/8"X14 | | 30 | 23 | 22 | 30 |
| S2B4-10-08 | G5/8"X14 | G1/2"X14 | | 30 | 22 | 22 | 27 |
| S2B4-12 | G3/4"X14 | G3/4"X14 | | 32 | 24.5 | 27 | 32 |
| S2B4-16 | G1"X11 | G1"X11 | | 35 | 27.5 | 33 | 41 |
| S2B4-20 | G1.1/4"X11 | G1.1/4"X11 | | 38.5 | 34.5 | 41 | 50 |
| S2B4-24 | G1.1/2"X11 | G1.1/2"X11 | | 45 | 37.5 | 48 | 55 |
| S2B4-32 | G2"X11 | G2"X11 | | 51 | 54.3 | 63 | 70 |

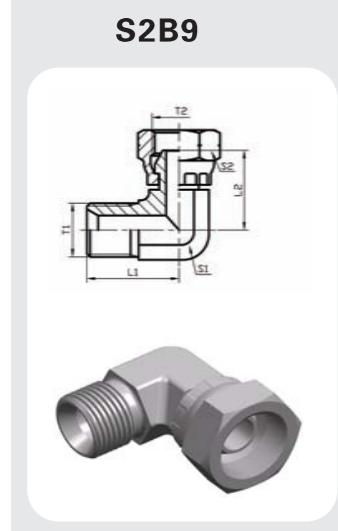

90° 弯英管外螺纹60° 内锥/英管内螺纹60° 外锥
90° ELBOW BSP MALE 60° SEAT/BSP FEMALE 60° CONE


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|-----------|----------|---------------|------|------|----|
| | T1 | T2 | L1 | L2 | S1 | S2 |
| S2B9-02 | G1/8"X28 | G1/8"X28 | | 19.8 | 17.9 | 11 |
| S2B9-04 | G1/4"X19 | G1/4"X19 | | 24.5 | 25.7 | 14 |
| S2B9-06 | G3/8"X19 | G3/8"X19 | | 27.5 | 29.6 | 16 |
| S2B9-08 | G1/2"X14 | G1/2"X14 | | 34.5 | 33.8 | 22 |
| S2B9-10 | G5/8"X14 | G5/8"X14 | | 35 | 32.1 | 22 |
| S2B9-12 | G3/4"X14 | G3/4"X14 | | 40 | 36.3 | 27 |
| S2B9-16 | G1"X11 | G1"X11 | | 46 | 42.7 | 33 |
| | | | | | | 41 |
| | | | | | | |
| | | | | | | |

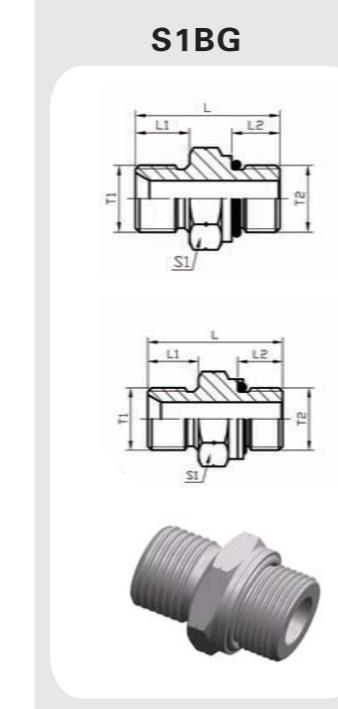

英制外螺纹60° 内锥/英管外螺纹O型圈
BSP MALE 60° SEAT/BSP MALE O-RING


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|------------|------------|---------------|----|------|------|
| | T1 | T2 | L1 | L2 | L | S2 |
| S1BG-02 | G1/8"X28 | G1/8"X28 | | | 10 | 9.5 |
| S1BG-04 | G1/4"X19 | G1/4"X19 | | | 12 | 11 |
| S1BG-04-06 | G1/4"X19 | G3/8"X19 | | | 12 | 11.5 |
| S1BG-06 | G3/8"X19 | G3/8"X19 | | | 13.5 | 11.5 |
| S1BG-06-04 | G3/8"X19 | G1/4"X19 | | | 13.5 | 11 |
| S1BG-06-08 | G3/8"X19 | G1/2"X14 | | | 13.5 | 14 |
| S1BG-08 | G1/2"X14 | G1/2"X14 | | | 16 | 14 |
| S1BG-08-06 | G1/2"X14 | G3/8"X19 | | | 16 | 11.5 |
| S1BG-08-12 | G1/2"X14 | G3/4"X14 | | | 16 | 15.5 |
| S1BG-10-08 | G5/8"X14 | G1/2"X14 | | | 17.5 | 14 |
| S1BG-12 | G3/4"X14 | G3/4"X14 | | | 18.5 | 15 |
| S1BG-12-08 | G3/4"X14 | G1/2"X14 | | | 18.5 | 14 |
| S1BG-16 | G1"X11 | G1"X11 | | | 20.5 | 18 |
| S1BG-16-12 | G1"X11 | G3/4"X14 | | | 20.5 | 15.5 |
| S1BG-20 | G1.1/4"X11 | G1.1/4"X11 | | | 20.5 | 20 |
| S1BG-24 | G1.1/2"X11 | G1.1/2"X11 | | | 23 | 21.5 |
| | | | | | 62.5 | 55 |

注:若需配挡圈请在代号后加“DQ”，如S1BG-16-12DQ。
Note: If you interested to order the adapter with retainer ring, please insert suffix "DQ" after our Part No, for example S1BG-16-12DQ.

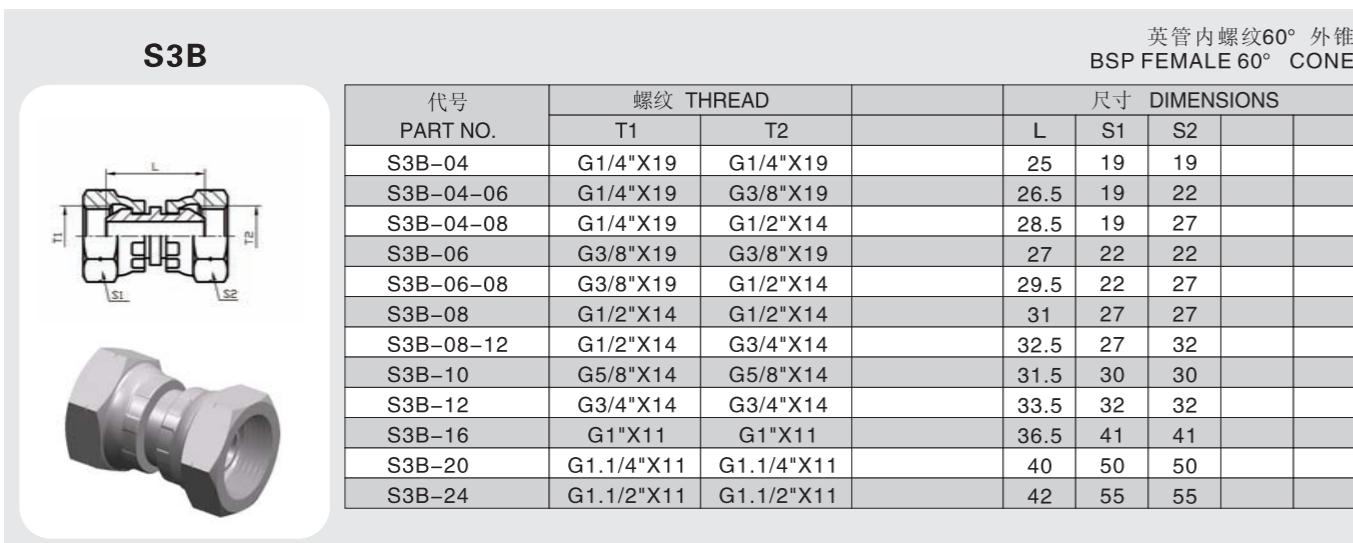

英管内螺纹60° 外锥
BSP FEMALE 60° CONE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|------------|------------|---------------|----|----|--|
| | T1 | T2 | L | S1 | S2 | |
| S3B-04 | G1/4"X19 | G1/4"X19 | 25 | 19 | 19 | |
| S3B-04-06 | G1/4"X19 | G3/8"X19 | 26.5 | 19 | 22 | |
| S3B-04-08 | G1/4"X19 | G1/2"X14 | 28.5 | 19 | 27 | |
| S3B-06 | G3/8"X19 | G3/8"X19 | 27 | 22 | 22 | |
| S3B-06-08 | G3/8"X19 | G1/2"X14 | 29.5 | 22 | 27 | |
| S3B-08 | G1/2"X14 | G1/2"X14 | 31 | 27 | 27 | |
| S3B-08-12 | G1/2"X14 | G3/4"X14 | 32.5 | 27 | 32 | |
| S3B-10 | G5/8"X14 | G5/8"X14 | 31.5 | 30 | 30 | |
| S3B-12 | G3/4"X14 | G3/4"X14 | 33.5 | 32 | 32 | |
| S3B-16 | G1"X11 | G1"X11 | 36.5 | 41 | 41 | |
| S3B-20 | G1.1/4"X11 | G1.1/4"X11 | 40 | 50 | 50 | |
| S3B-24 | G1.1/2"X11 | G1.1/2"X11 | 42 | 55 | 55 | |

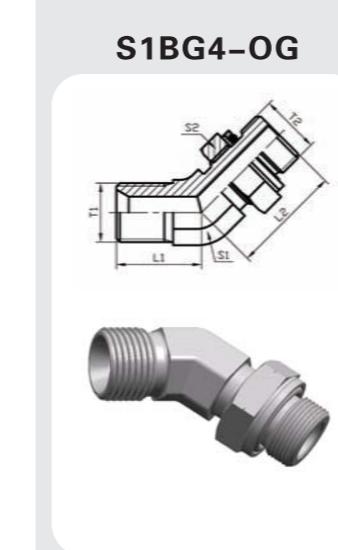


45° 弯英管外螺纹60° 内锥/英管外螺纹O形圈可调向柱端
45° ELBOW BSP MALE 60° SAET/BSP MALE O-RING ADJUSTABLE STUD END

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|------------|------------|---------------|----|------|------|
| | T1 | T2 | L1 | L2 | S1 | S2 |
| S1BG4-04OG | G1/4"X19 | G1/4"X19 | | | 22 | 28 |
| S1BG4-04-06OG | G1/4"X19 | G3/8"X19 | | | 21 | 30 |
| S1BG4-04-08OG | G1/4"X19 | G1/2"X14 | | | 22.5 | 36 |
| S1BG4-06OG | G3/8"X19 | G3/8"X19 | | | 21 | 30 |
| S1BG4-06-08OG | G3/8"X19 | G1/2"X14 | | | 23.5 | 36 |
| S1BG4-08OG | G1/2"X14 | G1/2"X14 | | | 27 | 36 |
| S1BG4-12OG | G3/4"X14 | G3/4"X14 | | | 32 | 42 |
| S1BG4-12-16OG | G3/4"X14 | G1"X11 | | | 32.5 | 44 |
| S1BG4-16OG | G1"X11 | G1"X11 | | | 34 | 44 |
| S1BG4-20OG | G1.1/4"X11 | G1.1/4"X11 | | | 38.5 | 47.5 |
| S1BG4-24OG | G1.1/2"X11 | G1.1/2"X11 | | | 44 | 51.5 |

注:若需配挡圈请在代号后加“DQ”，如S1BG4-04OGDQ。
Note: If you interested to order the adapter with retainer ring, please insert suffix "DQ" after our Part No, for example S1BG4-04OGDQ.


S1BG9-OG

90° ELBOW BSP MALE 60° SAET/BSP MALE O-RING ADJUSTABLE STUD END

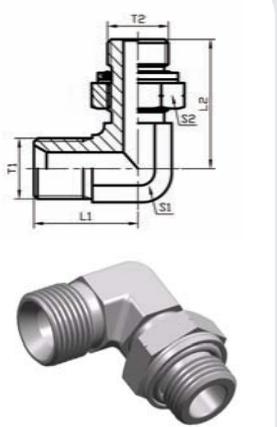


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | |
|----------------|------------|------------|--|---------------|------|----|----|
| | T1 | T2 | | L1 | L2 | S1 | S2 |
| S1BG9-04OG | G1/4"X19 | G1/4"X19 | | 25 | 31.5 | 14 | 19 |
| S1BG9-04-06OG | G1/4"X19 | G3/8"X19 | | 26.5 | 36.8 | 16 | 22 |
| S1BG9-06OG | G3/8"X19 | G3/8"X19 | | 28 | 36.8 | 16 | 22 |
| S1BG9-06-08OG | G3/8"X19 | G1/2"X14 | | 31 | 43.2 | 22 | 27 |
| S1BG9-08OG | G1/2"X14 | G1/2"X14 | | 34.5 | 43.2 | 22 | 27 |
| S1BG9-08-12OG | G1/2"X14 | G3/4"X14 | | 40 | 49.3 | 27 | 32 |
| S1BG9-12OG | G3/4"X14 | G3/4"X14 | | 40 | 49.3 | 27 | 32 |
| S1BG9-12-16OG | G3/4"X14 | G1"X11 | | 45 | 53 | 33 | 41 |
| S1BG9-16OG | G1"X11 | G1"X11 | | 46 | 53 | 33 | 41 |
| S1BG9-20-16OG | G1.1/4"X11 | G1"X11 | | 50.5 | 58 | 41 | 41 |
| S1BG9-20OG | G1.1/4"X11 | G1.1/4"X11 | | 51.5 | 58 | 41 | 50 |
| S1BG9-24OG | G1.1/2"X11 | G1.1/2"X11 | | 58.5 | 63 | 48 | 55 |


注:若需配挡圈请在代号后加“DQ”，如S1BG9-16OGDQ。
Note: If you interested to order the adapter with retainer ring, please insert suffix "DQ" after our Part No, for example S1BG9-16OGDQ.

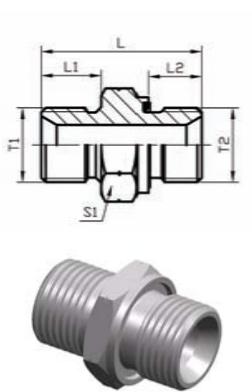S1B-WD英管外螺纹60° 内锥/英管外螺纹胶垫密封
BSP MALE 60° SEAT/BSP MALE CAPTIVE SEAL


| 代号 PART NO. | 螺纹 THREAD | | L | L1 | L2 | S1 |
|----------------|------------|------------|------|------|----|----|
| | T1 | T2 | | | | |
| S1B-02WD | G1/8"X28 | G1/8"X28 | 25.5 | 10 | 8 | 14 |
| S1B-04WD | G1/4"X19 | G1/4"X19 | 32 | 12 | 12 | 19 |
| S1B-06WD | G3/8"X19 | G3/8"X19 | 34 | 13.5 | 12 | 22 |
| S1B-08WD | G1/2"X14 | G1/2"X14 | 43 | 16 | 14 | 27 |
| S1B-12WD | G3/4"X14 | G3/4"X14 | 46.5 | 18.5 | 16 | 32 |
| S1B-16WD | G1"X11 | G1"X11 | 54.5 | 20.5 | 18 | 41 |
| S1B-20WD | G1.1/4"X11 | G1.1/4"X11 | 58.5 | 20.5 | 20 | 50 |
| S1B-24WD | G1.1/2"X11 | G1.1/2"X11 | 63 | 23 | 22 | 55 |
| S1B-32WD | G2"X11 | G2"X11 | 66.5 | 25.5 | 22 | 75 |

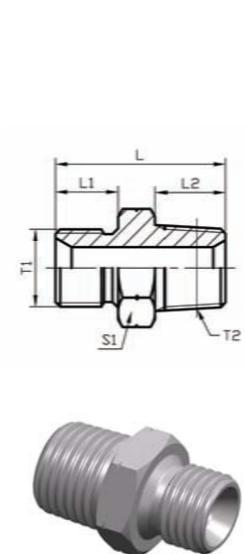S1BT-SP英管外螺纹60° 内锥/英锥管外螺纹60° 内锥
BSP MALE 60° SEAT/BSPT MALE 60° SEAT**A类**

| 代号 PART NO. | 螺纹 THREAD | | L | L1 | L2 | S1 |
|----------------|-------------|-------------|------|------|------|----|
| | T1 | T2 | | | | |
| S1BT-02SP | G1/8" X28 | R1/8" X28 | 26 | 10 | 10 | 14 |
| S1BT-02-04SP | G1/8" X28 | R1/4" X19 | 30.5 | 10 | 14.5 | 14 |
| S1BT-04SP | G1/4" X19 | R1/4" X19 | 32 | 12 | 14.5 | 19 |
| S1BT-04-02SP | G1/4" X19 | R1/8" X28 | 28.5 | 12 | 10 | 19 |
| S1BT-04-06SP | G1/4" X19 | R3/8" X19 | 32 | 12 | 15 | 19 |
| S1BT-06SP | G3/8" X19 | R3/8" X19 | 35.5 | 13.5 | 15 | 22 |
| S1BT-06-04SP | G3/8" X19 | R1/4" X19 | 35.5 | 13.5 | 14.5 | 22 |
| S1BT-06-08SP | G3/8" X19 | R1/2" X14 | 40.5 | 13.5 | 20 | 24 |
| S1BT-08SP | G1/2" X14 | R1/2" X14 | 45 | 16 | 20 | 27 |
| S1BT-08-06SP | G1/2" X14 | R3/8" X19 | 40 | 16 | 15 | 27 |
| S1BT-08-12SP | G1/2" X14 | R3/4" X14 | 45 | 16 | 20 | 30 |
| S1BT-10-08SP | G5/8" X14 | R1/2" X14 | 46.5 | 17.5 | 20 | 30 |
| S1BT-10-12SP | G5/8" X14 | R3/4" X14 | 46.5 | 17.5 | 20 | 30 |
| S1BT-12SP | G3/4" X14 | R3/4" X14 | 48.5 | 18.5 | 20 | 32 |
| S1BT-12-08SP | G3/4" X14 | R1/2" X14 | 49.5 | 18.5 | 20 | 32 |
| S1BT-12-16SP | G3/4" X14 | R1" X11 | 53.5 | 18.5 | 25.5 | 36 |
| S1BT-16SP | G1" X11 | R1" X11 | 58 | 20.5 | 25.5 | 41 |
| S1BT-16-12SP | G1" X11 | R3/4" X14 | 53 | 20.5 | 20 | 41 |
| S1BT-16-20SP | G1" X11 | R1.1/4" X11 | 60 | 20.5 | 26.5 | 46 |
| S1BT-20SP | G1.1/4" X11 | R1.1/4" X11 | 65 | 20.5 | 26.5 | 50 |
| S1BT-20-16SP | G1.1/4" X11 | R1" X11 | 61 | 20.5 | 25.5 | 50 |
| S1BT-20-24SP | G1.1/4" X11 | R1.1/2" X11 | 62 | 20.5 | 26.5 | 50 |
| S1BT-24SP | G1.1/2" X11 | R1.1/2" X11 | 71 | 23 | 25 | 55 |
| S1BT-24-20SP | G1.1/2" X11 | R1.1/4" X11 | 64.5 | 23 | 26.5 | 55 |
| S1BT-24-32SP | G1.1/2" X11 | R2" X11 | 70 | 23 | 30 | 65 |
| S1BT-32SP | G2" X11 | R2" X11 | 72.5 | 25.5 | 30 | 70 |
| S1BT-32-24SP | G2" X11 | R1.1/2" X11 | 68.5 | 25.5 | 26.5 | 70 |

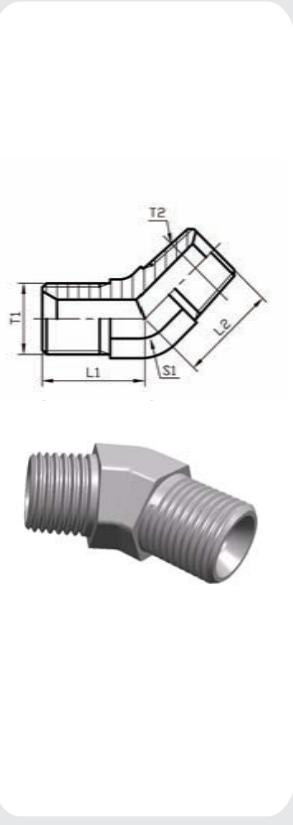S1BT4-SP45° 英管外螺纹60° 内锥/英管外螺纹60° 内锥
45° ELBOW BSP MALE 60° SEAT/BSPT MALE 60° SEAT

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|---------------|------|------|----|
| | T1 | T2 | L1 | L2 | S1 | S2 |
| S1BT4-02SP | G1/8 " X28 | R1/8 " X28 | | 17 | 17 | 11 |
| S1BT4-04SP | G1/4 " X19 | R1/4 " X19 | | 20.3 | 21 | 14 |
| S1BT4-04-06SP | G1/4 " X19 | R3/8 " X19 | | 20.5 | 23 | 16 |
| S1BT4-06SP | G3/8 " X19 | R3/8 " X19 | | 22 | 23 | 16 |
| S1BT4-06-04SP | G3/8 " X19 | R1/4 " X19 | | 22 | 21 | 16 |
| S1BT4-06-08SP | G3/8 " X19 | R1/2 " X14 | | 24 | 29.5 | 22 |
| S1BT4-08SP | G1/2 " X14 | R1/2 " X14 | | 27 | 29.5 | 22 |
| S1BT4-08-06SP | G1/2 " X14 | R3/8 " X19 | | 27 | 25 | 22 |
| S1BT4-08-12SP | G1/2 " X14 | R3/4 " X14 | | 28.5 | 30.5 | 27 |
| S1BT4-10-08SP | G5/8 " X14 | R1/2 " X14 | | 28.5 | 29.5 | 22 |
| S1BT4-10-12SP | G5/8 " X14 | R3/4 " X14 | | 29 | 30.5 | 27 |
| S1BT4-12SP | G3/4 " X14 | R3/4 " X14 | | 31 | 30.5 | 27 |
| S1BT4-12-08SP | G3/4 " X14 | R1/2 " X14 | | 31 | 30.5 | 27 |
| S1BT4-12-16SP | G3/4 " X14 | R1 " X11 | | 32.5 | 38 | 33 |
| S1BT4-16SP | G1 " X11 | R1 " X11 | | 35 | 38 | 33 |
| S1BT4-16-12SP | G1 " X11 | R3/4 " X14 | | 35 | 32.5 | 33 |
| S1BT4-16-20SP | G1 " X11 | R1.1/4 " X11 | | 38.5 | 43 | 41 |
| S1BT4-20SP | G1.1/4 " X11 | R1.1/4 " X11 | | 38.5 | 43 | 41 |
| S1BT4-20-16SP | G1.1/4 " X11 | R1 " X11 | | 38.5 | 42 | 41 |
| S1BT4-20-24SP | G1.1/4 " X11 | R1.1/2 " X11 | | 41.5 | 47.5 | 48 |
| S1BT4-24SP | G1.1/2 " X11 | R1.1/2 " X11 | | 39 | 47.5 | 47 |
| S1BT4-24-20SP | G1.1/2 " X11 | R1.1/4 " X11 | | 44 | 45.5 | 48 |
| S1BT4-24-32SP | G1.1/2 " X11 | R2 " X11 | | 51 | 53 | 63 |
| S1BT4-32SP | G2 " X11 | R2 " X11 | | 51 | 53 | 63 |
| S1BT4-32-24SP | G2 " X11 | R1.1/2 " X11 | | 51 | 52 | 63 |

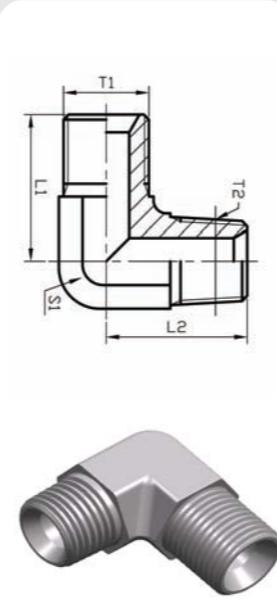
S1BT9-SP90° 英管外螺纹60° 内锥/英管外螺纹60° 内锥
90° ELBOW BSP MALE 60° SEAT/BSPT MALE 60° SEAT

A类

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|---------------|------|------|----|
| | T1 | T2 | L1 | L2 | S1 | S2 |
| S1BT9-02SP | G1/8 " X28 | R1/8 " X28 | | 20 | 21 | 11 |
| S1BT9-02-04SP | G1/8 " X28 | R1/4 " X19 | | 22.3 | 25.5 | 14 |
| S1BT9-04SP | G1/4 " X19 | R1/4 " X19 | | 24.5 | 25.5 | 14 |
| S1BT9-04-02SP | G1/4 " X19 | R1/8 " X28 | | 25 | 23.5 | 14 |
| S1BT9-04-06SP | G1/4 " X19 | R3/8 " X19 | | 25 | 28.5 | 16 |
| S1BT9-06SP | G3/8 " X19 | R3/8 " X19 | | 27.5 | 28.5 | 16 |
| S1BT9-06-04SP | G3/8 " X19 | R1/4 " X19 | | 27.5 | 26.5 | 16 |
| S1BT9-06-08SP | G3/8 " X19 | R1/2 " X14 | | 31 | 36 | 22 |
| S1BT9-08SP | G1/2 " X14 | R1/2 " X14 | | 34.5 | 36 | 22 |
| S1BT9-08-06SP | G1/2 " X14 | R3/8 " X19 | | 34.5 | 32.5 | 22 |
| S1BT9-08-12SP | G1/2 " X14 | R3/4 " X14 | | 37.5 | 43.5 | 27 |
| S1BT9-10-08SP | G5/8 " X14 | R1/2 " X14 | | 35 | 36 | 22 |
| S1BT9-10-12SP | G5/8 " X14 | R3/4 " X14 | | 39 | 43.5 | 27 |
| S1BT9-12SP | G3/4 " X14 | R3/4 " X14 | | 40 | 43 | 27 |
| S1BT9-12-08SP | G3/4 " X14 | R1/2 " X14 | | 40 | 39.5 | 27 |
| S1BT9-12-16SP | G3/4 " X14 | R1 " X11 | | 43.5 | 50 | 33 |
| S1BT9-16SP | G1 " X11 | R1 " X11 | | 46 | 50 | 33 |
| S1BT9-16-12SP | G1 " X11 | R3/4 " X14 | | 46 | 47.5 | 33 |
| S1BT9-16-20SP | G1 " X11 | R1.1/4 " X11 | | 50.5 | 56.5 | 41 |
| S1BT9-20SP | G1.1/4 " X11 | R1.1/4 " X11 | | 52 | 59 | 41 |
| S1BT9-20-16SP | G1.1/4 " X11 | R1 " X11 | | 52 | 56.5 | 41 |
| S1BT9-20-24SP | G1.1/4 " X11 | R1.1/2 " X11 | | 54.5 | 62.5 | 48 |
| S1BT9-24SP | G1.1/2 " X11 | R1.1/2 " X11 | | 57.5 | 62 | 48 |
| S1BT9-24-20SP | G1.1/2 " X11 | R1.1/4 " X11 | | 57.5 | 61 | 48 |

S5B


英管外螺纹60° 内锥或六角端面组合垫密封/英管内螺纹ISO 1179
BSP MALE DOUBLE USE FOR 60° SEAT OR BONDED SEAL/BSP FEMALE ISO 1179

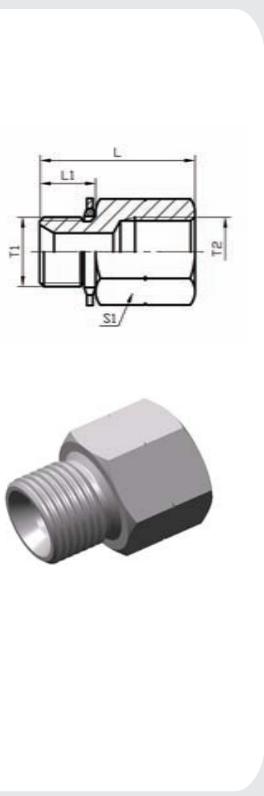

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|---------------|------|----|--|
| | T1 | T2 | L | L1 | S1 | |
| S5B-02-04 | G1/8 " X28 | G1/4 " X19 | 29 | 11 | 19 | |
| S5B-04-02 | G1/4 " X19 | G1/8 " X28 | 28 | 12 | 19 | |
| S5B-04 | G1/4 " X19 | G1/4 " X19 | 33 | 12 | 19 | |
| S5B-04-06 | G1/4 " X19 | G3/8 " X19 | 36 | 12 | 22 | |
| S5B-06-04 | G3/8 " X19 | G1/4 " X19 | 33.5 | 13.5 | 22 | |
| S5B-06 | G3/8 " X19 | G3/8 " X19 | 37.5 | 13.5 | 22 | |
| S5B-06-08 | G3/8 " X19 | G1/2 " X14 | 42.5 | 13.5 | 27 | |
| S5B-08-06 | G1/2 " X14 | G3/8 " X19 | 38 | 16 | 27 | |
| S5B-08 | G1/2 " X14 | G1/2 " X14 | 45 | 16 | 27 | |
| S5B-08-10 | G1/2 " X14 | G5/8 " X14 | 46 | 16 | 30 | |
| S5B-08-12 | G1/2 " X14 | G3/4 " X14 | 44.5 | 16 | 36 | |
| S5B-10-08 | G5/8 " X14 | G1/2 " X14 | 41.5 | 16 | 30 | |
| S5B-12-08 | G3/4 " X14 | G1/2 " X14 | 44.5 | 18.5 | 32 | |
| S5B-12 | G3/4 " X14 | G3/4 " X14 | 48 | 18.5 | 36 | |
| S5B-12-16 | G3/4 " X14 | G1 " X11 | 53.5 | 18.5 | 41 | |
| S5B-16-12 | G1 " X11 | G3/4 " X14 | 47.5 | 20.5 | 41 | |
| S5B-16 | G1 " X11 | G1 " X11 | 55.5 | 20.5 | 41 | |
| S5B-16-20 | G1 " X11 | G1.1/4 " X11 | 56.5 | 20.5 | 50 | |
| S5B-20-16 | G1.1/4 " X11 | G1 " X11 | 49 | 20.5 | 50 | |
| S5B-20 | G1.1/4 " X11 | G1.1/4 " X11 | 52.5 | 20.5 | 50 | |
| S5B-20-24 | G1.1/4 " X11 | G1.1/2 " 11 | 57.5 | 20.5 | 55 | |
| S5B-24 | G1.1/2 " 11 | G1.1/2 " 11 | 58 | 23 | 55 | |
| S5B-32-24 | G2 " X11 | G1.1/2 " 11 | 59.5 | 26 | 70 | |
| S5B-32 | G2 " X11 | G2 " X11 | 63 | 26 | 70 | |

S5B-WD


英管外螺纹胶垫密封/英管内螺纹 ISO 1179
BSP MALE CAPTIVE SEAL/BSP FEMALE ISO 1179

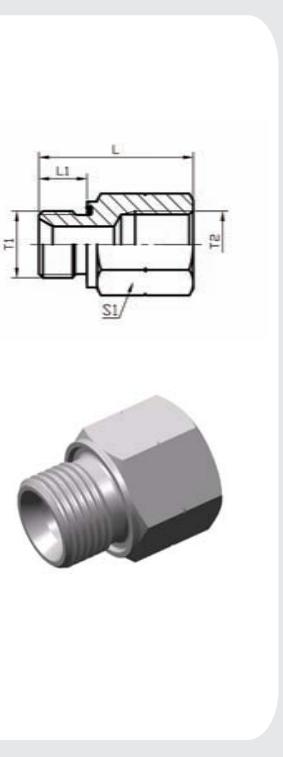

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|---------------|----|----|--|
| | T1 | T2 | L | L1 | S1 | |
| S5B-02-04WD | G1/8 " X28 | G1/4 " X19 | 30.5 | 8 | 19 | |
| S5B-02-06WD | G1/8 " X28 | G3/8 " X19 | 33.5 | 8 | 22 | |
| S5B-04-02WD | G1/4 " X19 | G1/8 " X28 | 31.5 | 12 | 19 | |
| S5B-04-06WD | G1/4 " X19 | G3/8 " X19 | 37 | 12 | 22 | |
| S5B-04-08WD | G1/4 " X19 | G1/2 " X14 | 43 | 12 | 27 | |
| S5B-06-02WD | G3/8 " X19 | G1/8 " X28 | 35.5 | 12 | 22 | |
| S5B-06-04WD | G3/8 " X19 | G1/4 " X19 | 37.5 | 12 | 22 | |
| S5B-06-08WD | G3/8 " X19 | G1/2 " X14 | 43.5 | 12 | 27 | |
| S5B-08-04WD | G1/2 " X14 | G1/4 " X19 | 38 | 14 | 27 | |
| S5B-08-06WD | G1/2 " X14 | G3/8 " X19 | 41 | 14 | 27 | |
| S5B-08-12WD | G1/2 " X14 | G3/4 " X14 | 46 | 14 | 36 | |
| S5B-12-08WD | G3/4 " X14 | G1/2 " X14 | 47.5 | 16 | 32 | |
| S5B-12-16WD | G3/4 " X14 | G1 " X11 | 53.5 | 16 | 41 | |
| S5B-12-20WD | G3/4 " X14 | G1.1/4 " X11 | 54.5 | 16 | 50 | |
| S5B-16-12WD | G1 " X11 | G3/4 " X14 | 50.5 | 18 | 41 | |
| S5B-16-20WD | G1 " X11 | G1.1/4 " X11 | 56.5 | 18 | 50 | |
| S5B-20-16WD | G1.1/4 " X11 | G1 " X11 | 57.5 | 20 | 50 | |
| S5B-20-24WD | G1.1/4 " X11 | G1.1/2 " X11 | 59.5 | 20 | 55 | |
| S5B-20-32WD | G1.1/4 " X11 | G2 " X11 | 64 | 20 | 70 | |
| S5B-24-16WD | G1.1/2 " X11 | G1 " X11 | 59.5 | 22 | 55 | |
| S5B-24-20WD | G1.1/2 " X11 | G1.1/4 " X11 | 60 | 22 | 55 | |
| S5B-24-32WD | G1.1/2 " X11 | G2 " X11 | 66 | 22 | 70 | |

S5BT


英管外螺纹60° 内锥或六角端面组合垫密封/英锥管内螺纹
BSP MALE DOUBLE USE FOR 60° SEAT OR BONDED SEAL/BSPT FEMALE

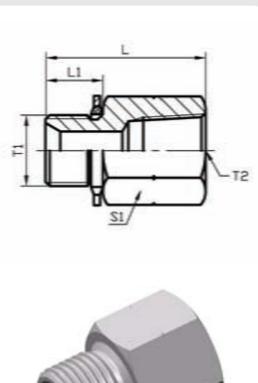

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|---------------|---------------|------|----|--|
| | T1 | T2 | L | L1 | S1 | |
| S5BT-04-02 | G1/4 " X19 | Rc1/8 " X28 | 28 | 12 | 19 | |
| S5BT-04 | G1/4 " X19 | Rc1/4 " X19 | 33.5 | 12 | 19 | |
| S5BT-04-06 | G1/4 " X19 | Rc3/8 " X19 | 34 | 12 | 22 | |
| S5BT-04-08 | G1/4 " X19 | Rc1/2 " X14 | 41 | 12 | 27 | |
| S5BT-06-04 | G3/8 " X19 | Rc1/4 " X19 | 35 | 13.5 | 22 | |
| S5BT-06 | G3/8 " X19 | Rc3/8 " X19 | 34 | 13.5 | 22 | |
| S5BT-08-06 | G1/2 " X14 | Rc3/8 " X19 | 39.5 | 16 | 27 | |
| S5BT-08 | G1/2 " X14 | Rc1/2 " X14 | 45 | 16 | 27 | |
| S5BT-10-08 | G5/8 " X14 | Rc1/2 " X14 | 43.5 | 17.5 | 30 | |
| S5BT-12-08 | G3/4 " X14 | Rc1/2 " X14 | 47.5 | 18.5 | 32 | |
| S5BT-12 | G3/4 " X14 | Rc3/4 " X14 | 49 | 18.5 | 36 | |
| S5BT-16-12 | G1 " X11 | Rc3/4 " X14 | 47.5 | 20.5 | 41 | |
| S5BT-16 | G1 " X11 | Rc1 " X11 | 57 | 20.5 | 41 | |
| S5BT-20 | G1.1/4 " X11 | Rc1.1/4 " X11 | 58.5 | 20.5 | 50 | |
| S5BT-24 | G1.1/2 " X11 | Rc1.1/2 " X11 | 61 | 23 | 55 | |

S5BN


英管外螺纹60° 内锥或六角端面用组合垫密封/ 美制布锥管内螺纹
BSP MALE DOUBLE USE FOR 60° SEAT OR BONDED SEAL/ NPT FEMALE

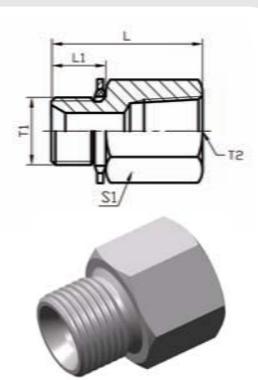

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|------------------|---------------|------|----|--|
| | T1 | T2 | L1 | L | S1 | |
| S5BN-04 | G1/4 " X19 | NPT1/4 " X18 | 12 | 31 | 19 | |
| S5BN-06 | G3/8 " X19 | NPT3/8 " X18 | 13.5 | 33 | 22 | |
| S5BN-08 | G1/2 " X14 | NPT1/2 " X14 | 16 | 42 | 30 | |
| S5BN-12 | G3/4 " X14 | NPT3/4 " X14 | 18.5 | 44.5 | 36 | |
| S5BN-16 | G1 " X11 | NPT1 " X11.5 | 20.5 | 52 | 41 | |
| S5BN-20 | G1.1/4 " X11 | NPT1.1/4 " X11.5 | 20.5 | 55 | 50 | |
| S5BN-24 | G1.1/2 " X11 | NPT1.1/2 " X11.5 | 23 | 60 | 60 | |
| S5BN-32 | G2 " X11 | NPT2 " X11.5 | 25.5 | 62 | 70 | |

S5GB

英管外螺纹O型圈/英管内螺纹 ISO 1179
BSP MALE O-RING/BSP FEMALE ISO 1179

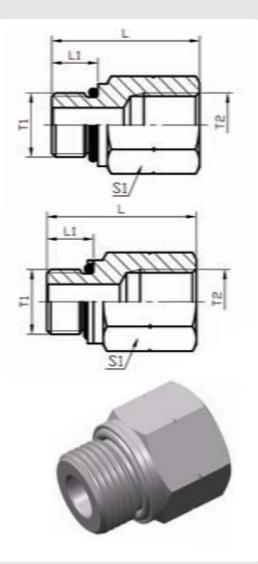

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
| --- | --- | --- | --- | --- | --- | --- |
| T1 | T2 | L | L1 | S1 | |

<tbl_r cells="7" ix="4" maxcspan="1"

过渡接头 ADAPTER

英制 BSP And BSPT Thread Fitting


Sannke®

过渡接头 ADAPTER

英制 BSP And BSPT Thread Fitting

Sannke®


S6B-LN

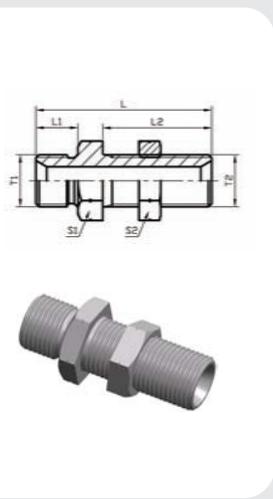

英管外螺纹60° 内锥过板接头
BSP MALE 60° SEAT BULKHEAD

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | | |
|----------------|--------------|--------------|---------------|------|----|------|----|----|
| | T1 | T2 | L1 | L2 | L | S1 | S2 | |
| S6B-04LN | G1/4 " X19 | G1/4 " X19 | | 12 | 35 | 53 | 19 | 19 |
| S6B-06LN | G3/8 " X19 | G3/8 " X19 | | 13.5 | 35 | 56.5 | 22 | 22 |
| S6B-08LN | G1/2 " X14 | G1/2 " X14 | | 16 | 39 | 65 | 27 | 27 |
| S6B-10LN | G5/8 " X14 | G5/8 " X14 | | 17.5 | 40 | 67.5 | 30 | 30 |
| S6B-12LN | G3/4 " X14 | G3/4 " X14 | | 18.5 | 42 | 71.5 | 32 | 32 |
| S6B-16LN | G1 " X11 | G1 " X11 | | 20.5 | 50 | 84 | 41 | 41 |
| S6B-20LN | G1.1/4 " X11 | G1.1/4 " X11 | | 20.5 | 52 | 89.5 | 50 | 50 |
| S6B-24LN | G1.1/2 " X11 | G1.1/2 " X11 | | 23 | 55 | 93 | 55 | 55 |


S7B

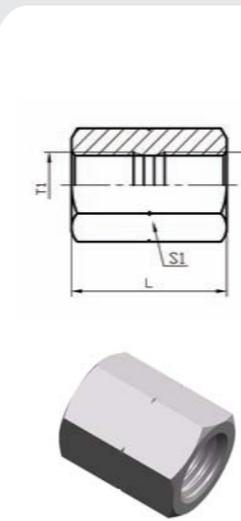

英管内螺纹 ISO 1179
BSP FEMALE ISO 1179

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | |
|----------------|--------------|--------------|---------------|----|----|
| | T1 | T2 | L | S1 | S2 |
| S7B-02 | G1/8 " X28 | G1/8 " X28 | | 22 | 14 |
| S7B-02-04 | G1/8 " X28 | G1/4 " X19 | | 24 | 19 |
| S7B-04 | G1/4 " X19 | G1/4 " X19 | | 24 | 19 |
| S7B-04-06 | G1/4 " X19 | G3/8 " X19 | | 29 | 22 |
| S7B-06 | G3/8 " X19 | G3/8 " X19 | | 26 | 22 |
| S7B-06-08 | G3/8 " X19 | G1/2 " X14 | | 33 | 27 |
| S7B-08 | G1/2 " X14 | G1/2 " X14 | | 32 | 27 |
| S7B-08-10 | G1/2 " X14 | G5/8 " X14 | | 36 | 30 |
| S7B-10 | G5/8 " X14 | G5/8 " X14 | | 36 | 30 |
| S7B-12 | G3/4 " X14 | G3/4 " X14 | | 36 | 32 |
| S7B-12-16 | G3/4 " X14 | G1 " X11 | | 43 | 41 |
| S7B-16 | G1 " X11 | G1 " X11 | | 40 | 41 |
| S7B-16-20 | G1 " X11 | G1.1/4 " X11 | | 46 | 50 |
| S7B-20 | G1.1/4 " X11 | G1.1/4 " X11 | | 44 | 50 |
| S7B-20-24 | G1.1/4 " X11 | G1.1/2 " X11 | | 48 | 55 |
| S7B-24 | G1.1/2 " X11 | G1.1/2 " X11 | | 45 | 55 |
| S7B-24-32 | G1.1/2 " X11 | G2 " X11 | | 56 | 70 |
| S7B-32 | G2 " X11 | G2 " X11 | | 54 | 70 |


S6B9-LN

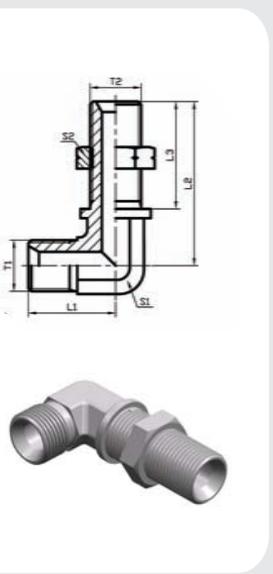

90° 弯英管外螺纹60° 内锥过板接头
90° BSP MALE 60° SEAT BULKHEAD


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | | |
|----------------|--------------|--------------|---------------|------|------|----|----|----|
| | T1 | T2 | L1 | L2 | L3 | S1 | S2 | |
| S6B9-04LN | G1/4 " X19 | G1/4 " X19 | | 25 | 51 | 35 | 16 | 19 |
| S6B9-06LN | G3/8 " X19 | G3/8 " X19 | | 29 | 53.5 | 35 | 19 | 22 |
| S6B9-08LN | G1/2 " X14 | G1/2 " X14 | | 34.5 | 58.5 | 39 | 22 | 27 |
| S6B9-12LN | G3/4 " X14 | G3/4 " X14 | | 41 | 64 | 42 | 30 | 32 |
| S6B9-16LN | G1 " X11 | G1 " X11 | | 47.5 | 71 | 50 | 33 | 41 |
| S6B9-20LN | G1.1/4 " X11 | G1.1/4 " X11 | | 52 | 84 | 52 | 41 | 50 |
| S6B9-24LN | G1.1/2 " X11 | G1.1/2 " X11 | | 57.5 | 93 | 55 | 48 | 55 |

S7B9

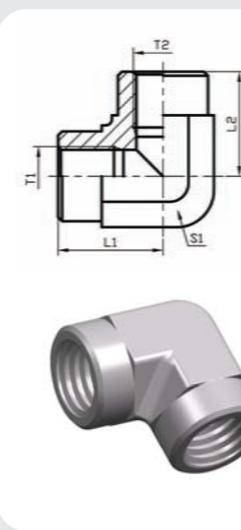


90° 弯英管内螺纹 ISO 1179
90° BSP FEMALE ISO 1179


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|---------------|------|------|----|
| | T1 | T2 | L1 | L2 | S1 | |
| S7B9-02 | G1/8 " X28 | G1/8 " X28 | | 20 | 20 | 16 |
| S7B9-04 | G1/4 " X19 | G1/4 " X19 | | 22.5 | 22.5 | 19 |
| S7B9-06 | G3/8 " X19 | G3/8 " X19 | | 26 | 26 | 24 |
| S7B9-08 | G1/2 " X14 | G1/2 " X14 | | 31 | 31 | 27 |
| S7B9-12 | G3/4 " X14 | G3/4 " X14 | | 34 | 34 | 33 |
| S7B9-16 | G1 " X11 | G1 " X11 | | 42 | 42 | 41 |
| S7B9-20 | G1.1/4 " X11 | G1.1/4 " X11 | | 48 | 48 | 50 |
| S7B9-24 | G1.1/2 " X11 | G1.1/2 " X11 | | 53 | 53 | 60 |
| S7B9-32 | G2 " X11 | G2 " X11 | | 62 | 62 | 70 |

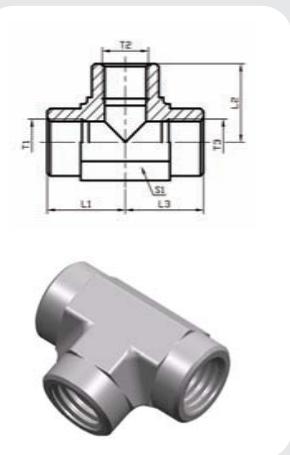SGB英管内螺纹 ISO 1179 三通
BSP FEMALE ISO 1179 TEE


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|--------------|---------------|------|------|----|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 |
| SGB-02 | G1/8 " X28 | G1/8 " X28 | G1/8 " X28 | 20 | 20 | 20 | 16 |
| SGB-04 | G1/4 " X19 | G1/4 " X19 | G1/4 " X19 | 22.5 | 22.5 | 22.5 | 19 |
| SGB-06 | G3/8 " X19 | G3/8 " X19 | G3/8 " X19 | 26 | 26 | 26 | 24 |
| SGB-08 | G1/2 " X14 | G1/2 " X14 | G1/2 " X14 | 31 | 31 | 31 | 27 |
| SGB-12 | G3/4 " X14 | G3/4 " X14 | G3/4 " X14 | 34 | 34 | 34 | 33 |
| SGB-16 | G1 " X11 | G1 " X11 | G1 " X11 | 42 | 42 | 42 | 41 |
| SGB-20 | G1.1/4 " X11 | G1.1/4 " X11 | G1.1/4 " X11 | 48 | 48 | 48 | 50 |
| SGB-24 | G1.1/2 " X11 | G1.1/2 " X11 | G1.1/2 " X11 | 53 | 53 | 53 | 60 |
| SGB-32 | G2 " X11 | G2 " X11 | G2 " X11 | 62 | 62 | 62 | 70 |

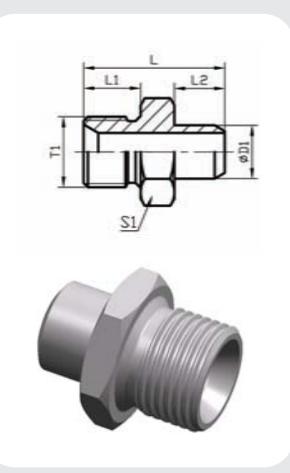S1BW英管外螺纹60° 内锥或六角端面用组合垫密封/焊接管
BSP MALE DOUBLE USE FOR 60° SEAT OR BONDED SEAL/BUTT-WELD TUBE


| 代号 PART NO. | 螺纹 THREAD | 管子直径 TUBE O.D. | 尺寸 DIMENSIONS | | | |
|----------------|--------------|----------------|---------------|----|------|----|
| | | | T1 | D1 | L1 | L2 |
| S1BW-04-10 | G1/4 " X19 | 10 | | | 12 | 7 |
| S1BW-06-14 | G3/8 " X19 | 14 | | | 13.5 | 8 |
| S1BW-08-18 | G1/2 " X14 | 18 | | | 16 | 10 |
| S1BW-12-22 | G3/4 " X14 | 22 | | | 18.5 | 10 |
| S1BW-12-28 | G3/4 " X14 | 28 | | | 18.5 | 12 |
| S1BW-16-28 | G1 " X11 | 28 | | | 20.5 | 12 |
| S1BW-16-30 | G1 " X11 | 30 | | | 20.5 | 12 |
| S1BW-20-34 | G1.1/4 " X11 | 34 | | | 20.5 | 14 |
| S1BW-20-36 | G1.1/4 " X11 | 36 | | | 20.5 | 14 |
| S1BW-20-42 | G1.1/4 " X11 | 42 | | | 20.5 | 16 |
| S1BW-24-36 | G1.1/2 " X11 | 36 | | | 23 | 14 |
| S1BW-24-42 | G1.1/2 " X11 | 42 | | | 23 | 16 |
| S1BW-24-50 | G1.1/2 " X11 | 50 | | | 23 | 16 |

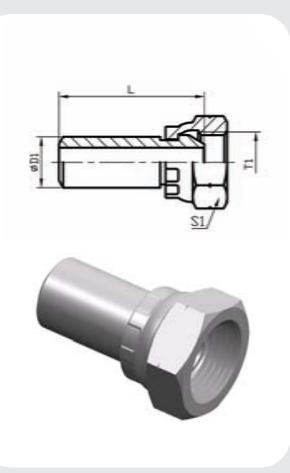S2WB焊接管/英管内螺纹60° 外锥
BUTT-WELD TUBE/BSP FEMALE 60° CONE

| 代号 PART NO. | 螺纹 THREAD | 管子直径 TUBE O.D. | 尺寸 DIMENSIONS | | | |
|----------------|--------------|----------------|---------------|----|------|----|
| | | | T1 | D1 | L | S1 |
| S2WB-10-04 | G1/4 " X19 | 10 | | | 35 | 19 |
| S2WB-14-06 | G3/8 " X19 | 14 | | | 40 | 22 |
| S2WB-18-08 | G1/2 " X14 | 18 | | | 50 | 27 |
| S2WB-22-08 | G1/2 " X14 | 22 | | | 50 | 27 |
| S2WB-22-12 | G3/4 " X14 | 22 | | | 62 | 32 |
| S2WB-28-16 | G1 " X11 | 28 | | | 65 | 41 |
| S2WB-34-20 | G1.1/4 " X11 | 34 | | | 68 | 50 |
| S2WB-42-20 | G1.1/4 " X11 | 42 | | | 59.5 | 50 |
| S2WB-50-24 | G1.1/2 " X11 | 50 | | | 57.5 | 55 |

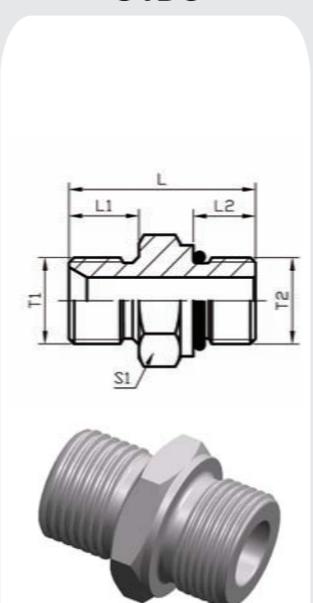S1BO英管外螺纹60° 内锥或六角端面用组合垫密封 /
美制SAE外螺纹带O形圈轻系列ISO
BSP MALE DOUBLE FOR 60° SEAT OR BONDED SEAL /
SAE O-RING Boss L-SERIES ISO

| 代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | | |
|----------------|--------------|---------------|----|------|------|
| | | T1 | T2 | L1 | L2 |
| S1BO-04 | G1/4 " X19 | 7/16 " X20 | | 12 | 9.1 |
| S1BO-04-05 | G1/4 " X19 | 1/2 " X20 | | 12 | 9.1 |
| S1BO-04-06 | G1/4 " X19 | 9/16 " X18 | | 12 | 9.9 |
| S1BO-04-08 | G1/4 " X19 | 3/4 " X16 | | 12 | 11.1 |
| S1BO-06 | G3/8 " X19 | 9/16 " X18 | | 13.5 | 9.9 |
| S1BO-06-04 | G3/8 " X19 | 7/16 " X20 | | 13.5 | 9.1 |
| S1BO-06-08 | G3/8 " X19 | 3/4 " X16 | | 13.5 | 11.1 |
| S1BO-06-10 | G3/8 " X19 | 7/8 " X14 | | 13.5 | 12.7 |
| S1BO-08 | G1/2 " X14 | 3/4 " X16 | | 16 | 11.1 |
| S1BO-08-06 | G1/2 " X14 | 9/16 " X18 | | 16 | 9.9 |
| S1BO-08-10 | G1/2 " X14 | 7/8 " X14 | | 16 | 12.7 |
| S1BO-08-12 | G1/2 " X14 | 1.1/16 " X12 | | 16 | 15.1 |
| S1BO-10 | G5/8 " X14 | 7/8 " X14 | | 17.5 | 12.7 |
| S1BO-10-08 | G5/8 " X14 | 3/4 " X16 | | 17.5 | 11.1 |
| S1BO-10-12 | G5/8 " X14 | 1.1/16 " X12 | | 17.5 | 15.1 |
| S1BO-12 | G3/4 " X14 | 1.1/16 " X12 | | 18.5 | 15.1 |
| S1BO-12-08 | G3/4 " X14 | 3/4 " X16 | | 18.5 | 11.1 |
| S1BO-12-10 | G3/4 " X14 | 7/8 " X14 | | 18.5 | 12.7 |
| S1BO-12-14 | G3/4 " X14 | 1.3/16 " X12 | | 18.5 | 15.1 |
| S1BO-12-16 | G3/4 " X14 | 1.5/16 " X12 | | 18.5 | 15.1 |
| S1BO-16 | G1 " X11 | 1.5/16 " X12 | | 20.5 | 15.1 |
| S1BO-16-10 | G1 " X11 | 7/8 " X14 | | 20.5 | 12.7 |
| S1BO-16-12 | G1 " X11 | 1.1/16 " X12 | | 20.5 | 15.1 |
| S1BO-16-14 | G1 " X11 | 1.3/16 " X12 | | 20.5 | 15.1 |
| S1BO-16-20 | G1 " X11 | 1.5/8 " X12 | | 20.5 | 15.1 |
| S1BO-20 | G1.1/4 " X11 | 1.5/8 " X12 | | 20.5 | 15.1 |
| S1BO-20-16 | G1.1/4 " X11 | 1.5/16 " X12 | | 20.5 | 15.1 |
| S1BO-24 | G1.1/2 " X11 | 1.7/8 " X12 | | 23 | 15.1 |

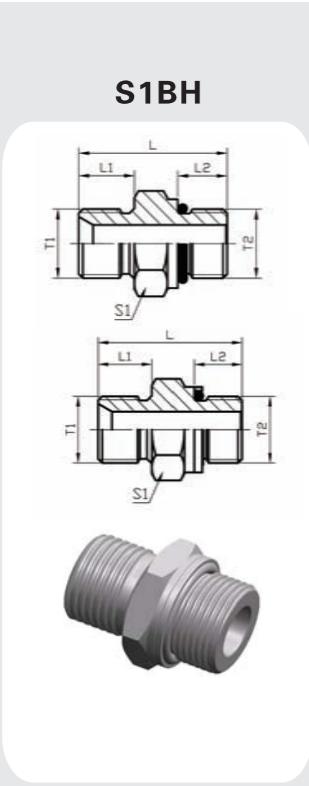


英管外螺纹60° 内锥或六角端面用组合垫密封 /
公制外螺纹轻系列ISO 6149-3
BSP MALE DOUBLE FOR 60° SEAT OR BONDED SEAL /
METRIC MALE L-SERIES ISO 6149-3

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|---------|---------------|------|----|------|
| | T1 | T2 | L1 | L2 | S1 | L |
| S1BH-02-10 | G1/8 " X28 | M10X1 | 10 | 8.5 | 14 | 25 |
| S1BH-02-12 | G1/8 " X28 | M12X1.5 | 10 | 11 | 17 | 28 |
| S1BH-04-12 | G1/4 " X19 | M12X1.5 | 12 | 11 | 19 | 30 |
| S1BH-04-14 | G1/4 " X19 | M14X1.5 | 12 | 11 | 19 | 31.5 |
| S1BH-04-16 | G1/4 " X19 | M16X1.5 | 12 | 11.5 | 22 | 31.5 |
| S1BH-06-14 | G3/8 " X19 | M14X1.5 | 13.5 | 11 | 22 | 35 |
| S1BH-06-16 | G3/8 " X19 | M16X1.5 | 13.5 | 11.5 | 22 | 33 |
| S1BH-06-18 | G3/8 " X19 | M18X1.5 | 13.5 | 12.5 | 24 | 36.5 |
| S1BH-08-18 | G1/2 " X14 | M18X1.5 | 16 | 12.5 | 27 | 41 |
| S1BH-08-22 | G1/2 " X14 | M22X1.5 | 16 | 13 | 27 | 41.5 |
| S1BH-10-22 | G5/8 " X14 | M22X1.5 | 17.5 | 13 | 30 | 43 |
| S1BH-12-22 | G3/4 " X14 | M22X1.5 | 18.5 | 13 | 32 | 45 |
| S1BH-12-27 | G3/4 " X14 | M27X2 | 18.5 | 16 | 32 | 45.5 |
| S1BH-16-27 | G1 " X11 | M27X2 | 20.5 | 16 | 41 | 49 |
| S1BH-16-33 | G1 " X11 | M33X2 | 20.5 | 16 | 41 | 49.5 |
| S1BH-20-42 | G1.1/4 " X11 | M42X2 | 20.5 | 16 | 50 | 51.5 |
| S1BH-24-48 | G1.1/2 " X11 | M48X2 | 23 | 17.5 | 55 | 55.5 |

注:若需配挡圈请在代号后加“DQ”，如S1BH-12-27DQ
Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our Part No, for example S1BH-12-27DQ

S1BH9-OG

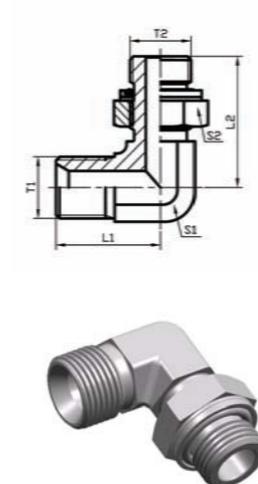

90° 弯英管外螺纹60° 内锥/公制外螺纹轻系列ISO 6149-3
90° BSP MALE 60° SEAT/METRIC MALE L-SERIES ISO 6149-3

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|---------|---------------|------|----|----|
| | T1 | T2 | L1 | L2 | S1 | S2 |
| S1BH9-02-10OG | G1/8 " X28 | M10X1 | 20 | 26.5 | 11 | 14 |
| S1BH9-02-12OG | G1/8 " X28 | M12X1.5 | 20 | 30.5 | 11 | 17 |
| S1BH9-04-12OG | G1/4 " X19 | M12X1.5 | 24.5 | 32 | 14 | 17 |
| S1BH9-04-14OG | G1/4 " X19 | M14X1.5 | 24.5 | 32.5 | 14 | 19 |
| S1BH9-04-16OG | G1/4 " X19 | M16X1.5 | 26.5 | 34.5 | 16 | 22 |
| S1BH9-06-14OG | G3/8 " X19 | M14X1.5 | 27.5 | 34 | 16 | 19 |
| S1BH9-06-16OG | G3/8 " X19 | M16X1.5 | 27.5 | 34.8 | 16 | 22 |
| S1BH9-06-18OG | G3/8 " X19 | M18X1.5 | 28.5 | 37 | 19 | 24 |
| S1BH9-08-18OG | G1/2 " X14 | M18X1.5 | 34.5 | 39.5 | 22 | 24 |
| S1BH9-08-22OG | G1/2 " X14 | M22X1.5 | 34.5 | 40.2 | 22 | 27 |
| S1BH9-10-22OG | G5/8 " X14 | M22X1.5 | 35 | 40.2 | 22 | 27 |
| S1BH9-12-22OG | G3/4 " X14 | M22X1.5 | 40 | 43.5 | 27 | 27 |
| S1BH9-12-27OG | G3/4 " X14 | M27X2 | 40 | 48.5 | 27 | 32 |
| S1BH9-16-27OG | G1 " X11 | M27X2 | 46 | 52 | 33 | 32 |
| S1BH9-16-33OG | G1 " X11 | M33X2 | 46 | 52.5 | 33 | 41 |
| S1BH9-20-42OG | G1.1/4 " X11 | M42X2 | 50.5 | 57.5 | 41 | 50 |
| S1BH9-24-48OG | G1.1/2 " X11 | M48X2 | 57.5 | 62.5 | 48 | 55 |

注:若需配挡圈请在代号后加“DQ”，如S1BH9-10-22OGDQ
Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our Part No, for example S1BH9-10-22OGDQ



S1BH4-OG




45° 弯英管外螺纹60° 内锥/公制外螺纹轻系列ISO 6149-3
45° BSP MALE 60° SEAT/METRIC MALE L-SERIES ISO 6149-3


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|---------|---------------|------|----|----|
| | T1 | T2 | L1 | L2 | S1 | S2 |
| S1BH4-02-10OG | G1/8 " X28 | M10X1 | 17 | 23.5 | 11 | 14 |
| S1BH4-02-12OG | G1/8 " X28 | M12X1.5 | 17 | 27.5 | 11 | 17 |
| S1BH4-04-12OG | G1/4 " X19 | M12X1.5 | 20.3 | 28.3 | 14 | 17 |
| S1BH4-04-14OG | G1/4 " X19 | M14X1.5 | 20.3 | 28.3 | 14 | 19 |
| S1BH4-04-16OG | G1/4 " X19 | M16X1.5 | 20.8 | 29.3 | 16 | 22 |
| S1BH4-06-14OG | G3/8 " X19 | M14X1.5 | 22.3 | 28.3 | 16 | 19 |
| S1BH4-06-16OG | G3/8 " X19 | M16X1.5 | 22.3 | 29.3 | 16 | 22 |
| S1BH4-06-18OG | G3/8 " X19 | M18X1.5 | 23 | 31 | 19 | 24 |
| S1BH4-08-18OG | G1/2 " X14 | M18X1.5 | 27.3 | 33.3 | 22 | 24 |
| S1BH4-08-22OG | G1/2 " X14 | M22X1.5 | 27.3 | 33.3 | 22 | 27 |
| S1BH4-10-22OG | G5/8 " X14 | M22X1.5 | 27.8 | 33.3 | 22 | 27 |
| S1BH4-12-22OG | G3/4 " X14 | M22X1.5 | 31 | 34.5 | 27 | 27 |
| S1BH4-12-27OG | G3/4 " X14 | M27X2 | 31 | 39.5 | 27 | 32 |
| S1BH4-16-27OG | G1 " X11 | M27X2 | 34.5 | 40.5 | 33 | 32 |
| S1BH4-16-33OG | G1 " X11 | M33X2 | 34.5 | 41 | 33 | 41 |
| S1BH4-20-42OG | G1.1/4 " X11 | M42X2 | 39 | 45.5 | 41 | 50 |
| S1BH4-24-48OG | G1.1/2 " X11 | M48X2 | 44 | 49.5 | 48 | 55 |

注:若需配挡圈请在代号后加“DQ”，如S1BH4-10-22OGDQ
Note: If you interested to order the adapter with retainer ring,please insert suffix"DQ" after our Part No, for example S1BH4-10-22OGDQ

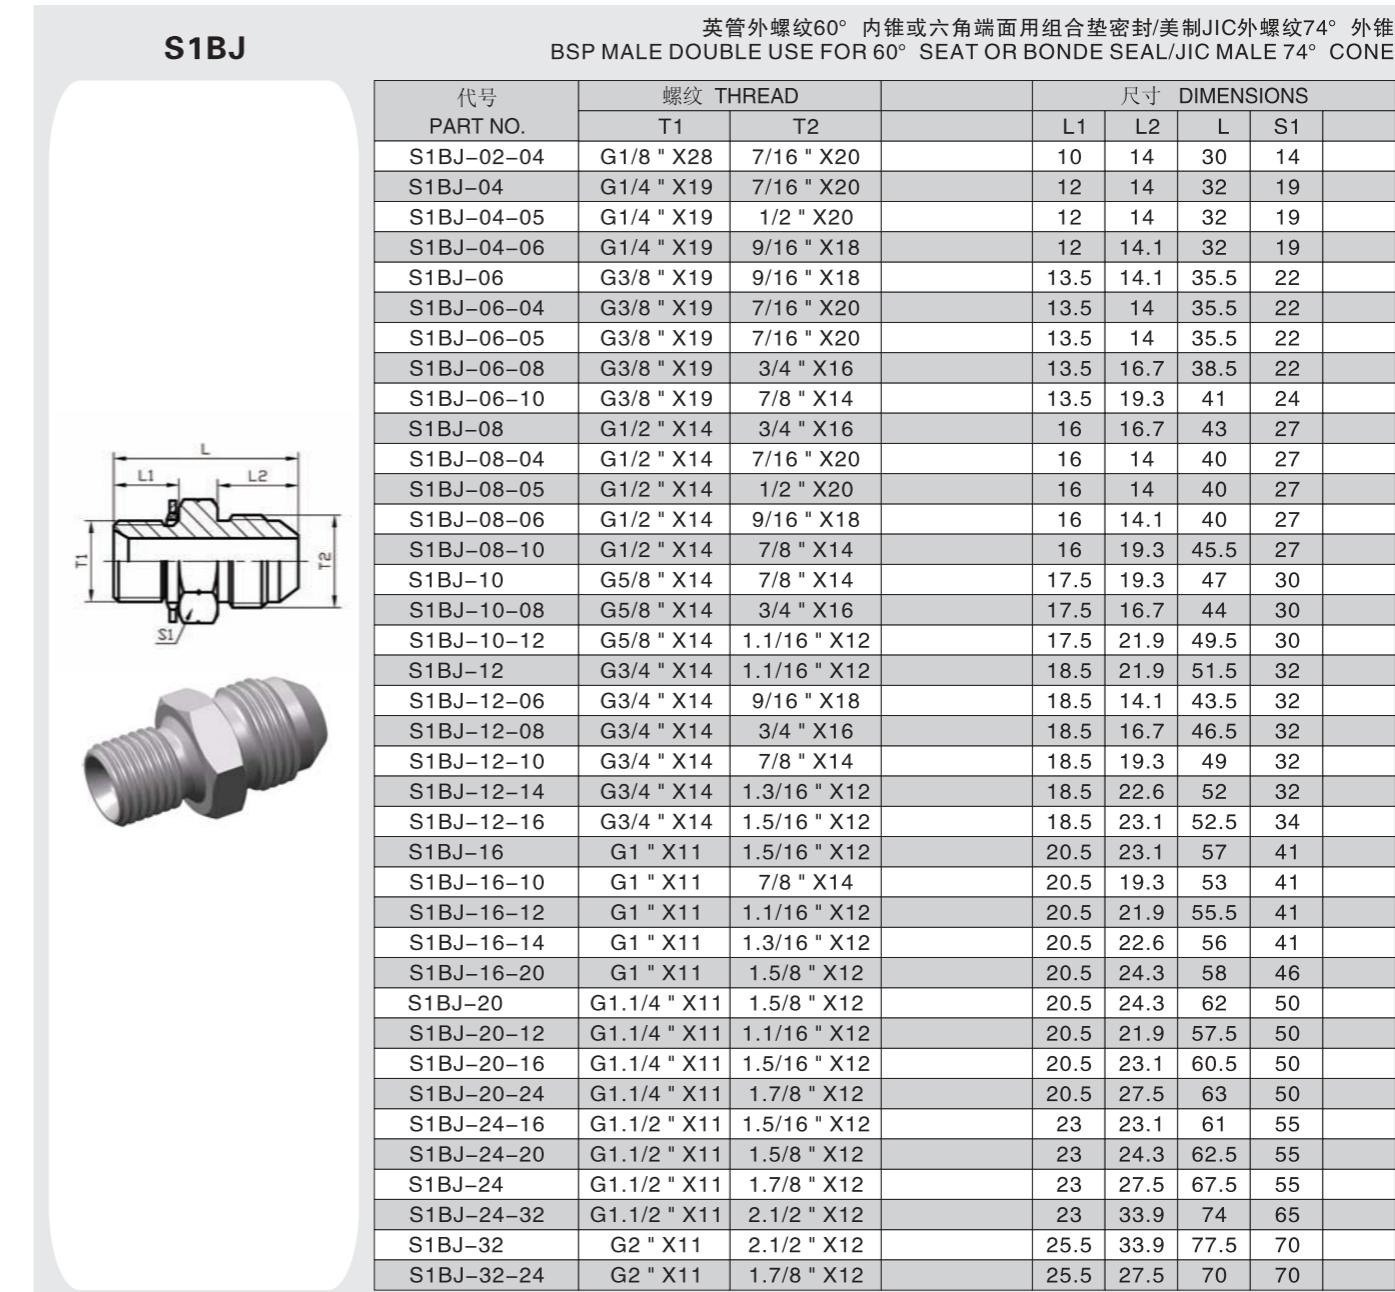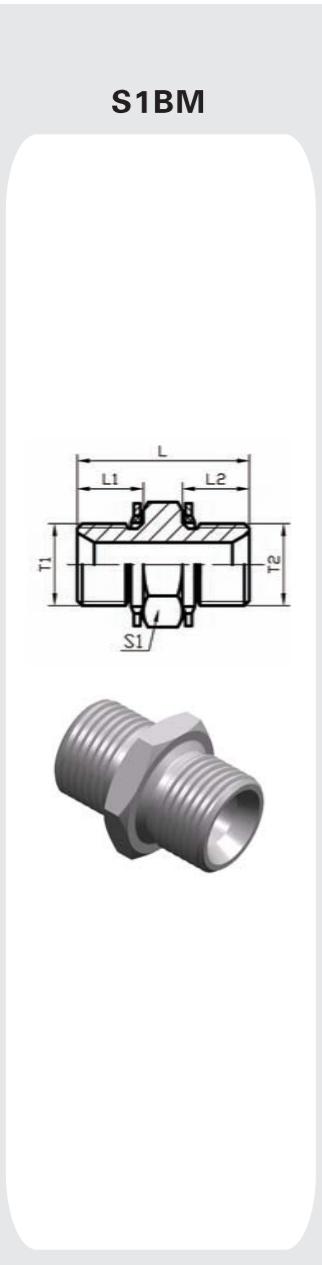


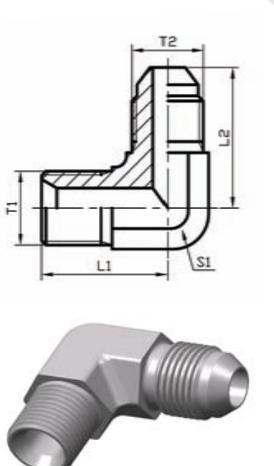S1BJ990° 弯英管外螺纹60° 内锥或六角端面用组合垫密封/美制JIC外螺纹74° 外锥
90° BSP MALE DOUBLE USE FOR 60° SEAT OR BONDE SEAL/JIC MALE 74° CONE


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|------------|--------------|---------------|------|----|----|
| | T1 | T2 | L1 | L2 | S1 | S2 |
| S1BJ9-04 | G1/4 " X19 | 7/16 " X20 | 24.5 | 26.5 | 14 | |
| S1BJ9-04-05 | G1/4 " X19 | 1/2 " X20 | 23.5 | 28 | 14 | |
| S1BJ9-04-06 | G1/4 " X19 | 9/16 " X18 | 24.5 | 26.9 | 14 | |
| S1BJ9-06 | G3/8 " X19 | 9/16 " X18 | 27.5 | 28.5 | 16 | |
| S1BJ9-06-08 | G3/8 " X19 | 3/4 " X16 | 28.5 | 32 | 19 | |
| S1BJ9-08 | G1/2 " X14 | 3/4 " X16 | 32.5 | 35 | 22 | |
| S1BJ9-08-10 | G1/2 " X14 | 7/8 " X14 | 34.5 | 37.8 | 22 | |
| S1BJ9-10 | G5/8 " X14 | 7/8 " X14 | 32.7 | 38.1 | 22 | |
| S1BJ9-12 | G3/4 " X14 | 1.1/16 " X12 | 37 | 44.2 | 27 | |
| S1BJ9-16 | G1 " X11 | 1.5/16 " X12 | 46 | 49 | 33 | |
| S1BJ9-16-20 | G1 " X11 | 1.5/8 " X12 | 50.5 | 55.5 | 41 | |

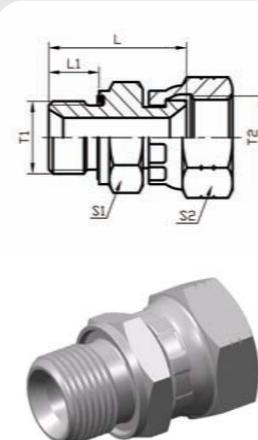S2BJ-WD英管外螺纹胶垫密封/美制JIC内螺纹74° 内锥
BSP MALE CAPTIVE SEAL/JIC FEMALE 74° SEAT

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|---------------|----|------|----|
| | T1 | T2 | L1 | L | S1 | S2 |
| S2BJ-02-04WD | G1/8 " X28 | 7/16 " X20 | | 8 | 23.5 | 14 |
| S2BJ-04-05WD | G1/4 " X19 | 1/2 " X20 | | 12 | 28.5 | 19 |
| S2BJ-04-06WD | G1/4 " X19 | 9/16 " X18 | | 12 | 28.5 | 19 |
| S2BJ-04-08WD | G1/4 " X19 | 3/4 " X16 | | 12 | 30.5 | 19 |
| S2BJ-04WD | G1/4 " X19 | 7/16 " X20 | | 12 | 28 | 19 |
| S2BJ-06-08WD | G3/8 " X19 | 3/4 " X16 | | 12 | 33 | 22 |
| S2BJ-06WD | G3/8 " X19 | 9/16 " X18 | | 12 | 31 | 22 |
| S2BJ-08-06WD | G1/2 " X14 | 9/16 " X18 | | 14 | 33.5 | 27 |
| S2BJ-08-10WD | G1/2 " X14 | 7/8 " X14 | | 14 | 38 | 27 |
| S2BJ-08WD | G1/2 " X14 | 3/4 " X16 | | 14 | 37.5 | 27 |
| S2BJ-12-16WD | G3/4 " X14 | 1.5/16 " X12 | | 16 | 42.5 | 32 |
| S2BJ-12WD | G3/4 " X14 | 1.1/16 " X12 | | 16 | 42.5 | 32 |
| S2BJ-16WD | G1 " X11 | 1.5/16 " X12 | | 18 | 46.5 | 41 |
| S2BJ-20-16WD | G1.1/4 " X11 | 1.5/16 " X12 | | 20 | 50.5 | 50 |
| S2BJ-20WD | G1.1/4 " X11 | 1.5/8 " X12 | | 20 | 54.5 | 50 |
| S2BJ-24WD | G1.1/2 " X11 | 1.7/8 " X12 | | 22 | 58.5 | 55 |

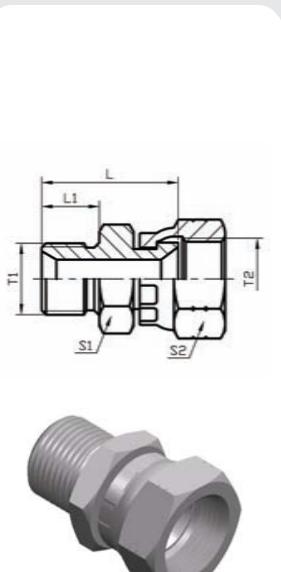S2BJ英管外螺纹60° 内锥或六角端面用组合垫密封/美制JIC内螺纹74° 内锥
BSP MALE DOUBLE USE FOR 60° SEAT OR BONDED SEAL/JIC FEMALE 74° SEAT


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|---------------|------|----|----|
| | T1 | T2 | L1 | L | S1 | S2 |
| S2BJ-02-04 | G1/8 " X28 | 7/16 " X20 | 10 | 24 | 14 | 15 |
| S2BJ-02-06 | G1/8 " X28 | 9/16 " X18 | 10 | 24.5 | 14 | 19 |
| S2BJ-04 | G1/4 " X19 | 7/16 " X20 | 12 | 26 | 19 | 15 |
| S2BJ-04-05 | G1/4 " X19 | 1/2 " X20 | 12 | 26.5 | 19 | 17 |
| S2BJ-04-06 | G1/4 " X19 | 9/16 " X18 | 12 | 27 | 19 | 19 |
| S2BJ-04-08 | G1/4 " X19 | 3/4 " X16 | 12 | 29 | 19 | 24 |
| S2BJ-06 | G3/8 " X19 | 9/16 " X18 | 13.5 | 30.5 | 22 | 19 |
| S2BJ-06-08 | G3/8 " X19 | 3/4 " X16 | 13.5 | 32.5 | 22 | 24 |
| S2BJ-06-10 | G3/8 " X19 | 7/8 " X14 | 13.5 | 33 | 22 | 27 |
| S2BJ-08 | G1/2 " X14 | 3/4 " X16 | 16 | 37 | 27 | 24 |
| S2BJ-08-06 | G1/2 " X14 | 9/16 " X18 | 16 | 35 | 27 | 19 |
| S2BJ-08-10 | G1/2 " X14 | 7/8 " X14 | 16 | 37.5 | 27 | 27 |
| S2BJ-10 | G5/8 " X14 | 7/8 " X14 | 17.5 | 37.5 | 30 | 27 |
| S2BJ-12 | G3/4 " X14 | 1.1/16 " X12 | 18.5 | 42 | 32 | 32 |
| S2BJ-12-08 | G3/4 " X14 | 3/4 " X16 | 18.5 | 40 | 32 | 24 |
| S2BJ-12-10 | G3/4 " X14 | 7/8 " X14 | 18.5 | 41 | 32 | 27 |
| S2BJ-12-16 | G3/4 " X14 | 1.5/16 " X12 | 18.5 | 42 | 32 | 41 |
| S2BJ-16 | G1 " X11 | 1.5/16 " X12 | 20.5 | 46 | 41 | 41 |
| S2BJ-16-20 | G1 " X11 | 1.5/8 " X12 | 20.5 | 50 | 41 | 50 |
| S2BJ-20 | G1.1/4 " X11 | 1.5/8 " X12 | 20.5 | 52 | 50 | 50 |
| S2BJ-20-24 | G1.1/4 " X11 | 1.7/8 " X12 | 20.5 | 53.5 | 50 | 55 |
| S2BJ-24 | G1.1/2 " X11 | 1.7/8 " X12 | 23 | 56.5 | 55 | 55 |
| S2BJ-32 | G2 " X11 | 2.1/2 " X12 | 25.5 | 60 | 70 | 75 |

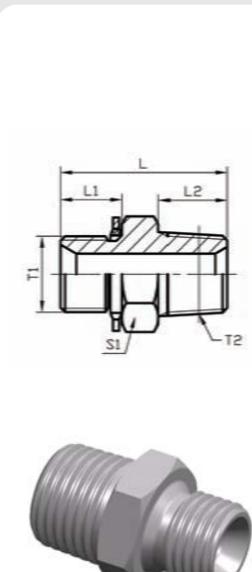S1BN英管外螺纹60° 内锥或六角端面用组合垫密封/美制布锥管外螺纹
BSP MALE DOUBLE USE FOR 60° SEAT OR BONDED SEAL/NPT MALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|------------------|---------------|------|------|------|
| | T1 | T2 | L1 | L | S1 | S2 |
| S1BN-02 | G1/8 " X28 | NPT1/8 " X27 | | 10 | 10.5 | 26 |
| S1BN-02-04 | G1/8 " X28 | NPT1/4 " X18 | | 10 | 15 | 31 |
| S1BN-04 | G1/4 " X19 | NPT1/4 " X18 | | 12 | 15 | 33 |
| S1BN-04-02 | G1/4 " X19 | NPT1/8 " X27 | | 12 | 10.5 | 28 |
| S1BN-04-06 | G1/4 " X19 | NPT3/8 " X18 | | 12 | 16 | 34 |
| S1BN-06 | G3/8 " X19 | NPT3/8 " X18 | | 13.5 | 16 | 37.5 |
| S1BN-06-04 | G3/8 " X19 | NPT1/4 " X18 | | 13.5 | 15 | 36 |
| S1BN-06-08 | G3/8 " X19 | NPT1/2 " X14 | | 13.5 | 19.5 | 41 |
| S1BN-08 | G1/2 " X14 | NPT1/2 " X14 | | 16 | 19.5 | 45.5 |
| S1BN-08-06 | G1/2 " X14 | NPT3/8 " X18 | | 16 | 16 | 42 |
| S1BN-08-12 | G1/2 " X14 | NPT3/4 " X14 | | 16 | 19.5 | 45.5 |
| S1BN-12 | G3/4 " X14 | NPT3/4 " X14 | | 18.5 | 19.5 | 49 |
| S1BN-12-08 | G3/4 " X14 | NPT1/2 " X14 | | 18.5 | 19.5 | 49 |
| S1BN-12-16 | G3/4 " X14 | NPT1 " X11.5 | | 18.5 | 25.5 | 55 |
| S1BN-16 | G1 " X11 | NPT1 " X11.5 | | 20.5 | 25.5 | 59 |
| S1BN-16-12 | G1 " X11 | NPT3/4 " X14 | | 20.5 | 19.5 | 53 |
| S1BN-20 | G1.1/4 " X11 | NPT1.1/4 " X11.5 | | 20.5 | 26.5 | 62 |
| S1BN-20-16 | G1.1/4 " X11 | NPT1 " X11.5 | | 20.5 | 25.5 | 61 |
| S1BN-20-24 | G1.1/4 " X11 | NPT1.1/2 " X11.5 | | 20.5 | 27.5 | 63 |
| S1BN-24 | G1.1/2 " X11 | NPT1.1/2 " X11.5 | | 23 | 27.5 | 65.5 |
| S1BN-24-20 | G1.1/2 " X11 | NPT1.1/4 " X11.5 | | 23 | 26.5 | 64.5 |
| S1BN-24-32 | G1.1/2 " X11 | NPT2 " X11.5 | | 23 | 27.5 | 6 |

S1BN9


90° 弯英管外螺纹60° 内锥或六角端面用组合垫密封/美制布锥管外螺纹
90° BSP MALE DOUBLE USE FOR 60° SEAT OR BONDED SEAL/NPT MALE

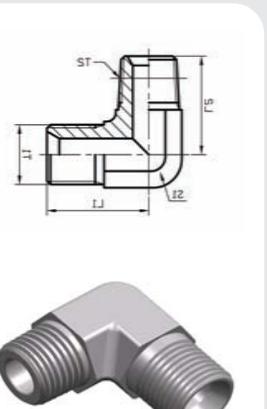

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | |
|----------------|------------|--------------|---------------|------|----|
| | T1 | T2 | L1 | L2 | S1 |
| S1BN9-04 | G1/4 " X19 | NPT1/4 " X18 | 24.5 | 25.5 | 14 |
| S1BN9-04-02 | G1/4 " X19 | NPT1/8 " X27 | 24.5 | 23.5 | 14 |
| S1BN9-06 | G3/8 " X19 | NPT3/8 " X18 | 28.5 | 31 | 16 |
| S1BN9-06-04 | G3/8 " X19 | NPT1/4 " X18 | 27.5 | 26.5 | 16 |
| S1BN9-06-08 | G3/8 " X19 | NPT1/2 " X14 | 31 | 36.5 | 22 |
| S1BN9-06-12 | G3/8 " X19 | NPT3/4 " X14 | 34.5 | 44 | 27 |
| S1BN9-08 | G1/2 " X14 | NPT1/2 " X14 | 34.5 | 37.5 | 22 |
| S1BN9-08-06 | G1/2 " X14 | NPT3/8 " X18 | 34.5 | 33 | 22 |
| S1BN9-12 | G3/4 " X14 | NPT3/4 " X14 | 38 | 43.5 | 27 |
| S1BN9-12-08 | G3/4 " X14 | NPT1/2 " X14 | 39 | 40 | 27 |
| S1BN9-12-16 | G3/4 " X14 | NPT1 " X11.5 | 43 | 50 | 33 |
| S1BN9-16 | G1 " X11 | NPT1 " X11.5 | 46 | 50 | 33 |
| S1BN9-16-12 | G1 " X11 | NPT3/4 " X14 | 46 | 46.5 | 33 |

S2NB9


90° 弯布锥管外螺纹/英管内螺纹60° 外锥
90° NPT MALE/BSP FEMALE 60° CONE

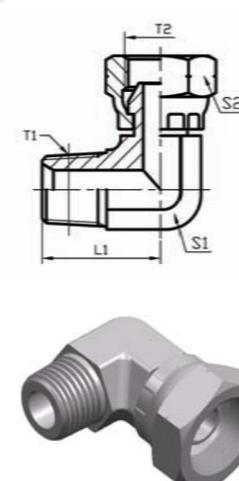

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | |
|----------------|------------------|--------------|---------------|----|----|
| | T1 | T2 | L1 | S1 | S2 |
| S2NB9-02 | NPT1/8 " X27 | G1/8 " X28 | 21 | 11 | 14 |
| S2NB9-04 | NPT1/4 " X19 | G1/4 " X19 | 25.5 | 14 | 19 |
| S2NB9-04-06 | NPT1/4 " X18 | G3/8 " X19 | 25.5 | 14 | 22 |
| S2NB9-06 | NPT3/8 " X18 | G3/8 " X19 | 31 | 16 | 22 |
| S2NB9-06-04 | NPT3/8 " X18 | G1/4 " X19 | 31 | 16 | 19 |
| S2NB9-06-08 | NPT3/8 " X18 | G1/2 " X14 | 31 | 19 | 27 |
| S2NB9-08 | NPT1/2 " X14 | G1/2 " X14 | 37.3 | 22 | 27 |
| S2NB9-08-06 | NPT1/2 " X14 | G3/8 " X19 | 36.7 | 22 | 22 |
| S2NB9-12 | NPT3/4 " X14 | G3/4 " X14 | 43.5 | 27 | 32 |
| S2NB9-12-08 | NPT3/4 " X14 | G1/2 " X14 | 45 | 27 | 27 |
| S2NB9-12-16 | NPT3/4 " X14 | G1 " X11 | 45 | 30 | 41 |
| S2NB9-16 | NPT1 " X11.5 | G1 " X11 | 50 | 33 | 41 |
| S2NB9-16-12 | NPT1 " X11.5 | G3/4 " X14 | 50 | 33 | 32 |
| S2NB9-20 | NPT1.1/4 " X11.5 | G1.1/4 " X11 | 54.5 | 41 | 50 |
| S2NB9-24 | NPT1.1/2 " X11.5 | G1.1/2 " X11 | 59 | 48 | 55 |
| S2NB9-32 | NPT2 " X11.5 | G2 " X11 | 73.5 | 63 | 70 |

S2NB


布锥管外螺纹/英管内螺纹60° 外锥
NPT MALE/BSP FEMALE 60° CONE

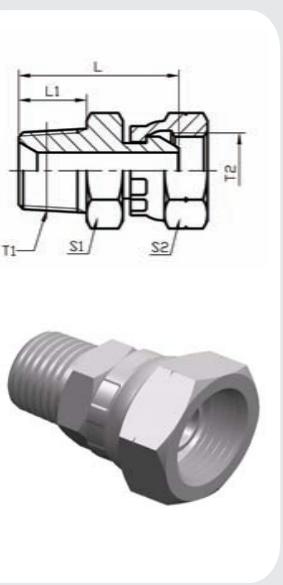


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|------------------|--------------|---------------|------|----|----|
| | T1 | T2 | L1 | L | S1 | S2 |
| S2NB-02 | NPT1/8 " X27 | G1/8 " X28 | 10.5 | 25.5 | 12 | 14 |
| S2NB-02-04 | NPT1/8 " X27 | G1/4 " X19 | 10.5 | 27 | 14 | 19 |
| S2NB-04 | NPT1/4 " X18 | G1/4 " X19 | 15 | 31 | 17 | 19 |
| S2NB-04-06 | NPT1/4 " X18 | G3/8 " X19 | 15 | 32.5 | 17 | 22 |
| S2NB-04-08 | NPT1/4 " X18 | G1/2 " X14 | 15 | 35 | 19 | 27 |
| S2NB-06 | NPT3/8 " X18 | G3/8 " X19 | 16 | 33.5 | 19 | 22 |
| S2NB-06-08 | NPT3/8 " X18 | G1/2 " X14 | 16 | 36 | 19 | 27 |
| S2NB-08 | NPT1/2 " X14 | G1/2 " X14 | 19.5 | 41 | 22 | 27 |
| S2NB-08-06 | NPT1/2 " X14 | G3/8 " X19 | 19.5 | 39.5 | 24 | 22 |
| S2NB-08-12 | NPT1/2 " X14 | G3/4 " X14 | 19.5 | 44.5 | 27 | 32 |
| S2NB-12 | NPT3/4 " X14 | G3/4 " X14 | 19.5 | 44.5 | 30 | 32 |
| S2NB-12-16 | NPT3/4 " X14 | G1 " X11 | 19.5 | 46.5 | 32 | 41 |
| S2NB-16 | NPT1 " X11.5 | G1 " X11 | 25.5 | 52.5 | 36 | 41 |
| S2NB-16-20 | NPT1 " X11.5 | G1.1/4 " X11 | 25.5 | 59.5 | 41 | 50 |
| S2NB-20 | NPT1.1/4 " X11.5 | G1.1/4 " X11 | 26.5 | 60.4 | 46 | 50 |
| S2NB-24 | NPT1.1/2 " X11.5 | G1.1/2 " X11 | 27.5 | 62 | 50 | 55 |
| S2NB-32 | NPT2 " X11.5 | G2 " X11 | 27.5 | 65.4 | 65 | 70 |

S2TB-SP

英锥管外螺纹/英管内螺纹60° 外锥
BSPT MALE/BSP FEMALE 60° CONE

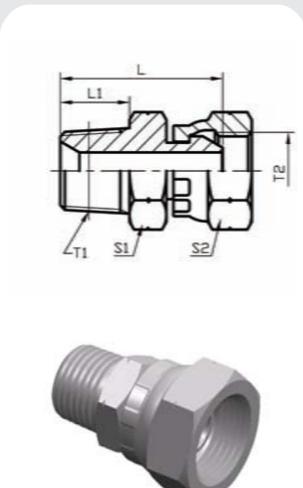


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|---------------|------|----|----|
| | T1 | T2 | L1 | L | S1 | S2 |
| S2TB-02SP | R1/8 " X28 | G1/8 " X28 | 10 | 25 | 12 | 14 |
| S2TB-04SP | R1/4 " X19 | G1/4 " X19 | 14.5 | 31.5 | 17 | 19 |
| S2TB-06SP | R3/8 " X19 | G3/8 " X19 | 15 | 33 | 19 | 22 |
| S2TB-06-04SP | R3/8 " X19 | G1/4 " X19 | 15 | 32 | 19 | 19 |
| S2TB-06-08SP | R3/8 " X19 | G1/2 " X14 | 15 | 35 | 19 | 27 |
| S2TB-08SP | R1/2 " X14 | G1/2 " X14 | 20 | 42 | 22 | 27 |
| S2TB-08-06SP | R1/2 " X14 | G3/8 " X19 | 20 | 40 | 22 | 22 |
| S2TB-08-12SP | R1/2 " X14 | G3/4 " X14 | 20 | 45 | 27 | 32 |
| S2TB-12SP | R3/4 " X14 | G3/4 " X14 | 20 | 45 | 30 | 32 |
| S2TB-12-08SP | R3/4 " X14 | G1/2 " X14 | 20 | 44 | 30 | 27 |
| S2TB-12-16SP | R3/4 " X14 | G1 " X11 | 20 | 47 | 32 | 41 |
| S2TB-16SP | R1 " X11 | G1 " X11 | 25.5 | 52.5 | 36 | 41 |
| S2TB-16-12SP | R1 " X11 | G3/4 " X14 | 25.5 | 51.5 | 36 | 32 |
| S2TB-20-16SP | R1.1/4 " X11 | G1 " X11 | 26.5 | 55.5 | 46 | 41 |
| S2TB-20SP | R1.1/4 " X11 | G1.1/4 " X11 | 26.5 | 59 | 46 | 50 |
| S2TB-24SP | R1.1/2 " X11 | G1.1/2 " X11 | 26.5 | 61.5 | 50 | 55 |
| S2TB-32SP | R2 " X11 | G2 " X11 | 30 | 68 | 65 | 70 |

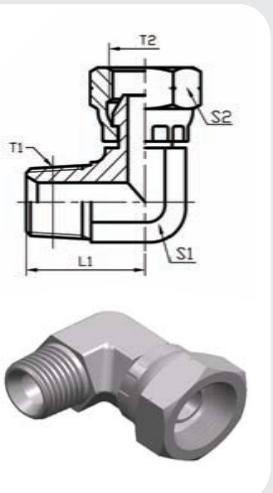S2TB9-SP90°弯英锥管外螺纹/英管内螺纹60° 外锥
90° BSPT MALE/BSP FEMALE 60° CONE


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|---------------|----|----|--|
| | T1 | T2 | L1 | S1 | S2 | |
| S2TB9-02SP | R1/8 " X28 | G1/8 " X28 | 21 | 11 | 14 | |
| S2TB9-04SP | R1/4 " X19 | G1/4 " X19 | 25.5 | 14 | 19 | |
| S2TB9-06SP | R3/8 " X19 | G3/8 " X19 | 28.5 | 16 | 22 | |
| S2TB9-06-08SP | R3/8 " X19 | G1/2 " X14 | 31 | 19 | 27 | |
| S2TB9-08-06SP | R1/2 " X14 | G3/8 " X19 | 36 | 22 | 22 | |
| S2TB9-08SP | R1/2 " X14 | G1/2 " X14 | 36 | 22 | 27 | |
| S2TB9-08-12SP | R1/2 " X14 | G3/4 " X14 | 37 | 24 | 32 | |
| S2TB9-12-08SP | R3/4 " X14 | G1/2 " X14 | 43.5 | 27 | 27 | |
| S2TB9-12SP | R3/4 " X14 | G3/4 " X14 | 43.5 | 27 | 32 | |
| S2TB9-16SP | R1 " X11 | G1 " X11 | 50 | 33 | 41 | |
| S2TB9-20SP | R1.1/4 " X11 | G1.1/4 " X11 | 58 | 41 | 50 | |
| S2TB9-24SP | R1.1/2 " X11 | G1.1/2 " X11 | 62.5 | 48 | 55 | |

E

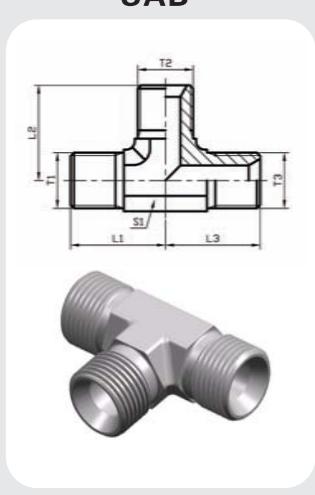SAB英管外螺纹60° 内锥三通
BSP MALE 60° SEAT TEE


| 代号 PART NO. | 螺纹 THREAD | | T3 | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|--------------|---------------|------|------|----|
| | T1 | T2 | | L1 | L2 | L3 | S1 |
| SAB-02 | G1/8 " X28 | G1/8 " X28 | G1/8 " X28 | 19.8 | 19.8 | 19.8 | 11 |
| SAB-04 | G1/4 " X19 | G1/4 " X19 | G1/4 " X19 | 24.5 | 24.5 | 24.5 | 14 |
| SAB-06 | G3/8 " X19 | G3/8 " X19 | G3/8 " X19 | 27.5 | 27.5 | 27.5 | 16 |
| SAB-08 | G1/2 " X14 | G1/2 " X14 | G1/2 " X14 | 34.5 | 34.5 | 34.5 | 22 |
| SAB-10 | G5/8 " X14 | G5/8 " X14 | G5/8 " X14 | 35 | 35 | 35 | 22 |
| SAB-12 | G3/4 " X14 | G3/4 " X14 | G3/4 " X14 | 40 | 40 | 40 | 27 |
| SAB-16 | G1 " X11 | G1 " X11 | G1 " X11 | 46 | 46 | 46 | 33 |
| SAB-20 | G1.1/4 " X11 | G1.1/4 " X11 | G1.1/4 " X11 | 50.5 | 50.5 | 50.5 | 41 |
| SAB-24 | G1.1/2 " X11 | G1.1/2 " X11 | G1.1/2 " X11 | 57.5 | 57.5 | 57.5 | 48 |

英制

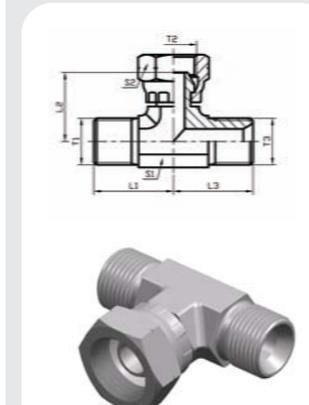SBB英锥外螺纹/英锥内螺纹/英锥外螺纹分支三通
BSP MALE/BSP FEMALE/BSP MALE BRANCH TEE


| 代号 PART NO. | 螺纹 THREAD | | T3 | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|--------------|---------------|------|------|----|
| | T1 | T2 | | L1 | L2 | L3 | S1 |
| SBB-02 | G1/8 " X28 | G1/8 " X28 | G1/8 " X28 | 19.8 | 19.8 | 17.9 | 11 |
| SBB-04 | G1/4 " X19 | G1/4 " X19 | G1/4 " X19 | 24.5 | 24.5 | 25.7 | 14 |
| SBB-06 | G3/8 " X19 | G3/8 " X19 | G3/8 " X19 | 27.5 | 27.5 | 29.6 | 16 |
| SBB-08 | G1/2 " X14 | G1/2 " X14 | G1/2 " X14 | 34.5 | 34.5 | 33.8 | 22 |
| SBB-10 | G5/8 " X14 | G5/8 " X14 | G5/8 " X14 | 35 | 35 | 32.1 | 22 |
| SBB-12 | G3/4 " X14 | G3/4 " X14 | G3/4 " X14 | 40 | 40 | 36.3 | 27 |
| SBB-16 | G1 " X11 | G1 " X11 | G1 " X11 | 46 | 46 | 42.7 | 33 |
| SBB-20 | G1.1/4 " X11 | G1.1/4 " X11 | G1.1/4 " X11 | 50.5 | 50.5 | 49.5 | 41 |

E

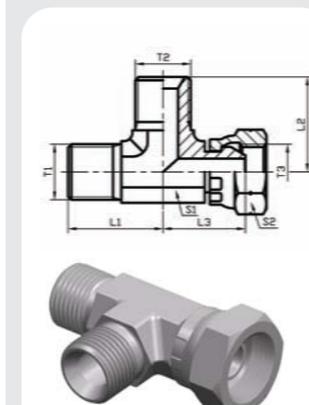SCB英锥外螺纹60° 内锥/英管外螺纹 60° 外锥主支三通
BSP MALE 60° SEAT/BSP FEMALE 60° CONE RUN TEE


| 代号 PART NO. | 螺纹 THREAD | | T3 | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|--------------|---------------|------|------|----|
| | T1 | T2 | | L1 | L1 | L3 | S1 |
| SCB-02 | G1/8 " X28 | G1/8 " X28 | G1/8 " X28 | 19.8 | 19.8 | 17.9 | 11 |
| SCB-04 | G1/4 " X19 | G1/4 " X19 | G1/4 " X19 | 24.5 | 24.5 | 25.7 | 14 |
| SCB-06 | G3/8 " X19 | G3/8 " X19 | G3/8 " X19 | 27.5 | 27.5 | 29.6 | 16 |
| SCB-08 | G1/2 " X14 | G1/2 " X14 | G1/2 " X14 | 34.5 | 34.5 | 33.8 | 22 |
| SCB-10 | G5/8 " X14 | G5/8 " X14 | G5/8 " X14 | 35 | 35 | 32.1 | 22 |
| SCB-12 | G3/4 " X14 | G3/4 " X14 | G3/4 " X14 | 40 | 40 | 36.3 | 27 |
| SCB-16 | G1 " X11 | G1 " X11 | G1 " X11 | 46 | 46 | 42.7 | 33 |
| SCB-20 | G1.1/4 " X11 | G1.1/4 " X11 | G1.1/4 " X11 | 50.5 | 50.5 | 49.5 | 41 |

英制

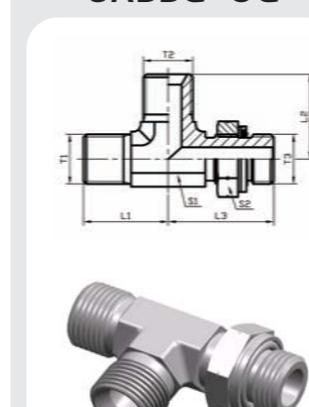SABBG-OG英锥外螺纹60° 内锥/英管外螺纹O型圈可调向柱端主支三通
BSP MALE 60° SEAT/BSP MALE O-RING ADJUSTABLE STUD END RUN TEE


| 代号 PART NO. | 螺纹 THREAD | | T3 | 尺寸 DIMENSIONS | | | |
|------------------|------------|------------|------------|---------------|------|------|----|
| | T1 | T2 | | L1 | L2 | L3 | S1 |
| SABBG-04OG | G1/4 " X19 | G1/4 " X19 | G1/4 " X19 | 24.5 | 24.5 | 31.3 | 14 |
| SABBG-04-04-06OG | G1/4 " X19 | G1/4 " X19 | G3/8 " X19 | 26.5 | 26.5 | 35.5 | 16 |
| SABBG-06OG | G3/8 " X19 | G3/8 " X19 | G3/8 " X19 | 27.5 | 27.5 | 35.8 | 16 |
| SABBG-06-06-08OG | G3/8 " X19 | G3/8 " X19 | G1/2 " X14 | 31 | 31 | 43 | 22 |
| SABBG-08OG | G1/2 " X14 | G1/2 " X14 | G1/2 " X14 | 34.5 | 34.5 | 43.2 | 22 |
| SABBG-12OG | G3/4 " X14 | G3/4 " X14 | G3/4 " X14 | 40 | 40 | 49.3 | 27 |
| SABBG-16OG | G1 " X11 | G1 " X11 | G1 " X11 | 46 | 46 | 53 | 33 |

英制


SABGB-OG英制外螺纹60° 内锥/英管外螺纹O型圈可调向柱端分支三通
BSP MALE 60° SEAT/BSP MALE O-RING ADJUSTABLE STUD END BRANCH TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | |
|------------------|------------|------------|------------|---------------|------|------|----|----|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | S2 |
| SABGB-04OG | G1/4 " X19 | G1/4 " X19 | G1/4 " X19 | 24.5 | 31.8 | 24.5 | 14 | 19 |
| SABGB-06-04-06OG | G3/8 " X19 | G1/4 " X19 | G3/8 " X19 | 27.5 | 33.5 | 27.5 | 16 | 19 |
| SABGB-06OG | G3/8 " X19 | G3/8 " X19 | G3/8 " X19 | 27.5 | 36.8 | 27.5 | 16 | 22 |
| SABGB-08-06-08OG | G1/2 " X14 | G3/8 " X19 | G1/2 " X14 | 34.5 | 39.5 | 34.5 | 22 | 22 |
| SABGB-08OG | G1/2 " X14 | G1/2 " X14 | G1/2 " X14 | 34.5 | 43.2 | 34.5 | 22 | 27 |
| SABGB-12-08-12OG | G3/4 " X14 | G1/2 " X14 | G3/4 " X14 | 40 | 46.5 | 40 | 27 | 27 |
| SABGB-12OG | G3/4 " X14 | G3/4 " X14 | G3/4 " X14 | 40 | 49.3 | 40 | 27 | 32 |
| SABGB-16OG | G1 " X11 | G1 " X11 | G1 " X11 | 46 | 53 | 46 | 33 | 41 |


注:若需配挡圈请在代号后加“DQ”，如SABGB-12OG DQ。
Note: If you interested to order the adapter with retainer ring, please insert suffix "DQ" after our Part No, for example SABGB-12OGDQ.

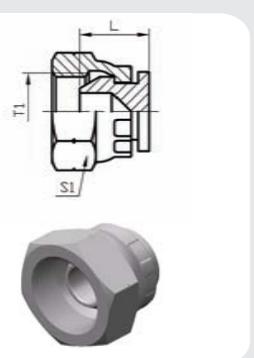S9B英制内螺纹60° 外锥堵头
BSPT FEMALE 60° CONE PLUG


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--|--|---------------|----|--|--|
| | T1 | | | L | S1 | | |
| S9B-02 | G1/8 " X28 | | | 11.5 | 14 | | |
| S9B-04 | G1/4 " X19 | | | 13.5 | 19 | | |
| S9B-06 | G3/8 " X19 | | | 14.5 | 22 | | |
| S9B-08 | G1/2 " X14 | | | 16 | 27 | | |
| S9B-10 | G5/8 " X14 | | | 16.5 | 30 | | |
| S9B-12 | G3/4 " X14 | | | 17.5 | 32 | | |
| S9B-16 | G1 " X11 | | | 19 | 41 | | |
| S9B-20 | G1.1/4 " X11 | | | 21.5 | 50 | | |
| S9B-24 | G1.1/2 " X11 | | | 22 | 55 | | |

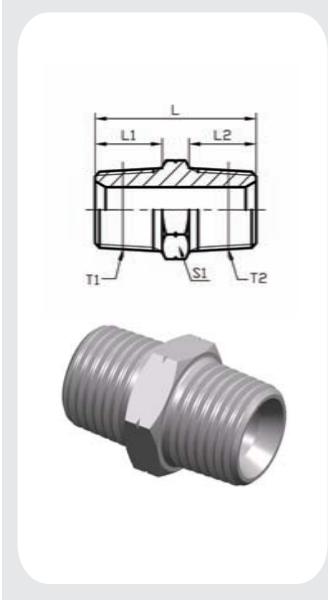S1T-SP英制管外螺纹60° 内锥
BSPT MALE 60° SEAT


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|--|---------------|------|------|----|
| | T1 | T2 | | L1 | L2 | L | S1 |
| S1T-02SP | R1/8 " X28 | R1/8 " X28 | | 10 | 10 | 26 | 12 |
| S1T-02-04SP | R1/8 " X28 | R1/4 " X19 | | 10 | 14.5 | 30.5 | 14 |
| S1T-04SP | R1/4 " X19 | R1/4 " X19 | | 14.5 | 14.5 | 34 | 14 |
| S1T-04-06SP | R1/4 " X19 | R3/8 " X19 | | 14.5 | 15 | 35 | 17 |
| S1T-06SP | R3/8 " X19 | R3/8 " X19 | | 15 | 15 | 36 | 19 |
| S1T-06-08SP | R3/8 " X19 | R1/2 " X14 | | 15 | 20 | 43 | 22 |
| S1T-08SP | R1/2 " X14 | R1/2 " X14 | | 20 | 20 | 46 | 22 |
| S1T-08-12SP | R1/2 " X14 | R3/4 " X14 | | 20 | 20 | 48 | 27 |
| S1T-12SP | R3/4 " X14 | R3/4 " X14 | | 20 | 20 | 48 | 27 |
| S1T-12-16SP | R3/4 " X14 | R1 " X11 | | 20 | 25.5 | 55.5 | 36 |
| S1T-16SP | R1 " X11 | R1 " X11 | | 25.5 | 25.5 | 61 | 36 |
| S1T-16-20SP | R1 " X11 | R1.1/4 " X11 | | 25.5 | 26.5 | 64.5 | 46 |
| S1T-20SP | R1.1/4 " X11 | R1.1/4 " X11 | | 26.5 | 26.5 | 65.5 | 46 |
| S1T-20-24SP | R1.1/4 " X11 | R1.1/2 " X11 | | 26.5 | 26.5 | 67 | 50 |
| S1T-24SP | R1.1/2 " X11 | R1.1/2 " X11 | | 26.5 | 26.5 | 67 | 50 |
| S1T-24-32SP | R1.1/2 " X11 | R2 " X11 | | 26.5 | 30 | 71.5 | 65 |
| S1T-32SP | R2 " X11 | R2 " X11 | | 30 | 30 | 75 | 65 |

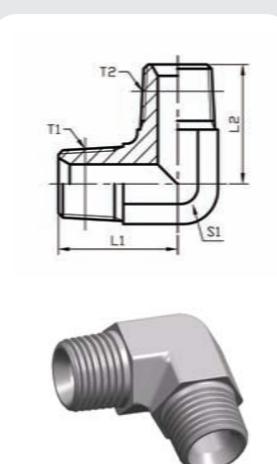S1T9-SP90° 弯英锥管外螺纹60° 内锥
90° ELBOW BSPT MALE 60° SEAT


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--------------|--|---------------|----|------|------|
| | T1 | T2 | | L1 | L2 | S1 | |
| S1T9-02SP | R1/8 " X28 | R1/8 " X28 | | | | 21 | 21 |
| S1T9-02-04SP | R1/8 " X28 | R1/4 " X19 | | | | 23.5 | 25.5 |
| S1T9-04SP | R1/4 " X19 | R1/4 " X19 | | | | 25.5 | 25.5 |
| S1T9-04-06SP | R1/4 " X19 | R3/8 " X19 | | | | 26.5 | 28.5 |
| S1T9-06SP | R3/8 " X19 | R3/8 " X19 | | | | 28.5 | 28.5 |
| S1T9-06-08SP | R3/8 " X19 | R1/2 " X14 | | | | 32.5 | 36 |
| S1T9-08SP | R1/2 " X14 | R1/2 " X14 | | | | 36 | 36 |
| S1T9-08-12SP | R1/2 " X14 | R3/4 " X14 | | | | 39.5 | 43.5 |
| S1T9-12SP | R3/4 " X14 | R3/4 " X14 | | | | 43.5 | 43.5 |
| S1T9-12-16SP | R3/4 " X14 | R1 " X11 | | | | 48 | 50 |
| S1T9-16SP | R1 " X11 | R1 " X11 | | | | 50 | 50 |
| S1T9-16-20SP | R1 " X11 | R1.1/4 " X11 | | | | 56.5 | 57.5 |
| S1T9-20SP | R1.1/4 " X11 | R1.1/4 " X11 | | | | 57.5 | 57.5 |
| S1T9-24SP | R1.1/2 " X11 | R1.1/2 " X11 | | | | 62.5 | 62.5 |
| S1T9-32SP | R2 " X11 | R2 " X11 | | | | 68 | 75 |
| | | | | | | 63 | |

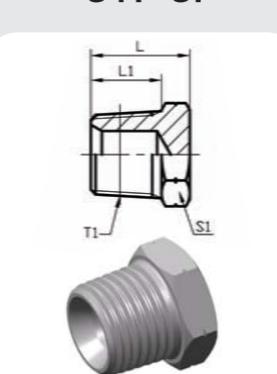S4T-SP英制管外螺纹60° 内锥堵头
BSPT MALE 60° SEAT PLUG

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|--|--|---------------|----|------|------|
| | T1 | | | L | L1 | S1 | |
| S4T-02SP | R1/8"X28 | | | | | 16 | 10 |
| S4T-04SP | R1/4 " X19 | | | | | 20 | 14.5 |
| S4T-06SP | R3/8 " X19 | | | | | 21 | 15 |
| S4T-08SP | R1/2 " X14 | | | | | 27 | 20 |
| S4T-12SP | R3/4 " X14 | | | | | 29 | 20 |
| S4T-16SP | R1 " X11 | | | | | 36.5 | 25.5 |
| S4T-20SP | R1.1/4 " X11 | | | | | 38.5 | 26.5 |
| S4T-24SP | R1.1/2 " X11 | | | | | 42 | 26.5 |
| S4T-32SP | R2X11 | | | | | 47 | 30 |
| | | | | | | 65 | |

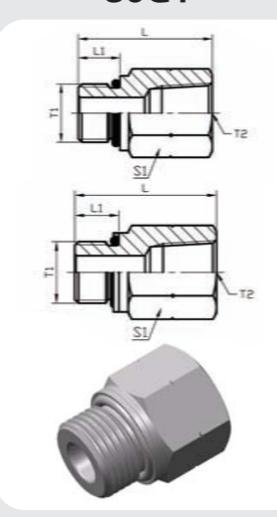S5GT英管外螺纹O型圈/英管内螺纹
BSPT


S5T-SP

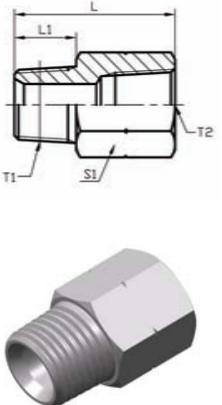

A类


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|---------------|---------------|------|------|----|
| | T1 | T2 | L1 | L | S1 | |
| S5T-02-04SP | R1/8 " X28 | Rc1/4 " X19 | | 11 | 32.5 | 19 |
| S5T-04-02SP | R1/4 " X19 | Rc1/8 " X28 | | 14.5 | 20.5 | 14 |
| S5T-04SP | R1/4 " X19 | Rc1/4 " X19 | | 14.5 | 36 | 19 |
| S5T-04-06SP | R1/4 " X19 | Rc3/8 " X19 | | 14.5 | 38 | 22 |
| S5T-06-04SP | R3/8 " X19 | Rc1/4 " X19 | | 15 | 23 | 19 |
| S5T-06SP | R3/8 " X19 | Rc3/8 " X19 | | 15 | 38.5 | 22 |
| S5T-06-08SP | R3/8 " X19 | Rc1/2 " X14 | | 15 | 44 | 27 |
| S5T-08-04SP | R1/2 " X14 | Rc1/4 " X19 | | 20 | 30 | 24 |
| S5T-08-06SP | R1/2 " X14 | Rc3/8 " X19 | | 20 | 30 | 24 |
| S5T-08SP | R1/2 " X14 | Rc1/2 " X14 | | 20 | 49 | 27 |
| S5T-08-12SP | R1/2 " X14 | Rc3/4 " X14 | | 20 | 51 | 36 |
| S5T-12-06SP | R3/4 " X14 | Rc3/8 " X19 | | 20 | 31 | 30 |
| S5T-12-08SP | R3/4 " X14 | Rc1/2 " X14 | | 20 | 31 | 30 |
| S5T-12SP | R3/4 " X14 | Rc3/4 " X14 | | 20 | 51 | 36 |
| S5T-12-16SP | R3/4 " X14 | Rc1 " X11 | | 20 | 56.5 | 41 |
| S5T-16-08SP | R1 " X11 | Rc1/2 " X14 | | 25.5 | 37 | 36 |
| S5T-16-12SP | R1 " X11 | Rc3/4 " X14 | | 25.5 | 37 | 36 |
| S5T-16SP | R1 " X11 | Rc1 " X11 | | 25.5 | 60 | 41 |
| S5T-16-20SP | R1 " X11 | Rc1.1/4 " X11 | | 25.5 | 64 | 50 |
| S5T-20-12SP | R1.1/4 " X11 | Rc3/4 " X14 | | 26.5 | 38 | 46 |
| S5T-20-16SP | R1.1/4 " X11 | Rc1 " X11 | | 26.5 | 38 | 46 |
| S5T-20SP | R1.1/4 " X11 | Rc1.1/4 " X11 | | 26.5 | 64.5 | 50 |
| S5T-24-16SP | R1.1/2 " X11 | Rc1 " X11 | | 26.5 | 41 | 50 |
| S5T-24-20SP | R1.1/2 " X11 | Rc1.1/4 " X11 | | 26.5 | 41 | 50 |
| S5T-32-20SP | R2 " X11 | Rc1.1/4 " X11 | | 30 | 45 | 65 |
| S5T-32-24SP | R2 " X11 | Rc1.1/2 " X11 | | 30 | 45 | 65 |

S5T9-SP

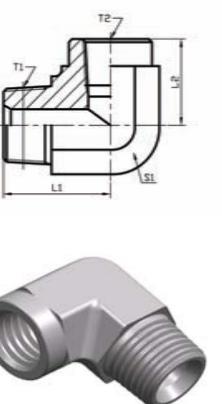90° 弯 英锥管外螺纹60° 内锥/ 英锥管内螺纹
90° ELBOW BSPT MALE 60° SEAT/BSPT FEMALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|--------------|---------------|---------------|------|------|----|
| | T1 | T2 | L1 | L2 | S1 | |
| S5T9-02SP | R1/8 " X28 | Rc1/8 " X28 | | 24.5 | 23 | 16 |
| S5T9-04SP | R1/4 " X19 | Rc1/4 " X19 | | 28.5 | 25 | 19 |
| S5T9-06SP | R3/8 " X19 | Rc3/8 " X19 | | 33.5 | 25 | 24 |
| S5T9-08SP | R1/2 " X14 | Rc1/2 " X14 | | 40.8 | 31.5 | 30 |
| S5T9-12SP | R3/4 " X14 | Rc3/4 " X14 | | 47.5 | 37 | 33 |
| S5T9-16SP | R1 " X11 | Rc1 " X11 | | 56.5 | 43 | 41 |
| S5T9-20SP | R1.1/4 " X11 | Rc1.1/4 " X11 | | 61 | 50 | 48 |
| S5T9-24SP | R1.1/2 " X11 | Rc1.1/2 " X11 | | 75 | 55 | 63 |


S7T



A类


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | |
|----------------|---------------|---------------|---------------|----|----|
| | T1 | T2 | L | S1 | |
| S7T-02 | Rc1/8 " X28 | Rc1/8 " X28 | | 20 | 14 |
| S7T-02-04 | Rc1/8 " X28 | Rc1/4 " X19 | | 30 | 19 |
| S7T-04 | Rc1/4 " X19 | Rc1/4 " X19 | | 30 | 19 |
| S7T-04-06 | Rc1/4 " X19 | Rc3/8 " X19 | | 30 | 22 |
| S7T-04-08 | Rc1/4 " X19 | Rc1/2 " X14 | | 40 | 27 |
| S7T-06 | Rc3/8 " X19 | Rc3/8 " X19 | | 30 | 22 |
| S7T-06-08 | Rc3/8 " X19 | Rc1/2 " X14 | | 40 | 27 |
| S7T-06-12 | Rc3/8 " X19 | Rc3/4 " X14 | | 37 | 36 |
| S7T-08 | Rc1/2 " X14 | Rc1/2 " X14 | | 40 | 27 |
| S7T-08-12 | Rc1/2 " X14 | Rc3/4 " X14 | | 42 | 36 |
| S7T-12 | Rc3/4 " X14 | Rc3/4 " X14 | | 42 | 36 |
| S7T-12-16 | Rc3/4 " X14 | Rc1 " X11 | | 50 | 41 |
| S7T-16 | Rc1 " X11 | Rc1 " X11 | | 50 | 41 |
| S7T-16-20 | Rc1 " X11 | Rc1.1/4 " X11 | | 52 | 50 |
| S7T-20 | Rc1.1/4 " X11 | Rc1.1/4 " X11 | | 55 | 50 |
| S7T-24 | Rc1.1/2 " X11 | Rc1.1/2 " X11 | | 55 | 55 |
| S7T-32 | Rc2 " X11 | Rc2 " X11 | | 65 | 70 |

S7T9




| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | |
|----------------|---------------|---------------|---------------|------|------|----|
| | T1 | T2 | L1 | L2 | S1 | |
| S7T9-02 | Rc1/8 " X28 | Rc1/8 " X28 | | 20 | 20 | 16 |
| S7T9-04 | Rc1/4 " X19 | Rc1/4 " X19 | | 22.5 | 22.5 | 19 |
| S7T9-06 | Rc3/8 " X19 | Rc3/8 " X19 | | 26 | 26 | 24 |
| S7T9-08 | Rc1/2 " X14 | Rc1/2 " X14 | | 31 | 31 | 27 |
| S7T9-12 | Rc3/4 " X14 | Rc3/4 " X14 | | 34 | 34 | 33 |
| S7T9-16 | Rc1 " X11 | Rc1 " X11 | | 42 | 42 | 41 |
| S7T9-20 | Rc1.1/4 " X11 | Rc1.1/4 " X11 | | 48 | 48 | 50 |
| S7T9-24 | Rc1.1/2 " X11 | Rc1.1/2 " X11 | | 53 | 53 | 60 |
| S7T9-32 | Rc2 " X11 | Rc2 " X11 | | 62 | 62 | 70 |

SGT




A类

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | |
|----------------|---------------|---------------|---------------|---------------|------|----|
| | T1 | T2 | T3 | L1 | L2 | S1 |
| SGT-02 | Rc1/8 " X28 | Rc1/8 " X28 | Rc1/8 " X28 | 20 | 20 | 16 |
| SGT-04 | Rc1/4 " X19 | Rc1/4 " X19 | Rc1/4 " X19 | 22.5 | 22.5 | 19 |
| SGT-06 | Rc3/8 " X19 | Rc3/8 " X19 | Rc3/8 " X19 | 26 | 26 | 24 |
| SGT-08 | Rc1/2 " X14 | Rc1/2 " X14 | Rc1/2 " X14 | 31 | 31 | 27 |
| SGT-12 | Rc3/4 " X14 | Rc3/4 " X14 | Rc3/4 " X14 | 34 | 34 | 33 |
| SGT-16 | Rc1 " X11 | Rc1 " X11 | Rc1 " X11 | 42 | 42 | 41 |
| SGT-20 | Rc1.1/4 " X11 | Rc1.1/4 " X11 | Rc1.1/4 " X11 | 48 | 48 | 50 |
| SGT-24 | Rc1.1/2 " X11 | Rc1.1/2 " X11 | Rc1.1/2 " X11 | 53 | 53 | 60 |
| SGT-32 | Rc2 " X11 | Rc2 " X11 | Rc2 " X11 | 62 | 62 | 70 |

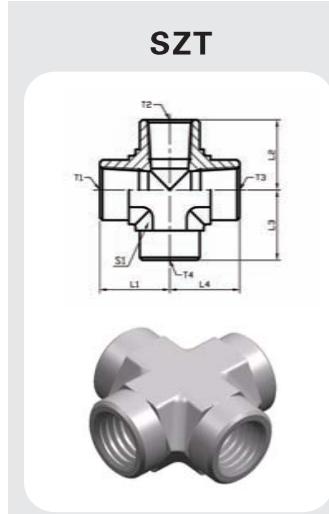


英锥管内螺纹四通
BSPT FEMALE CROSS

| 代号 PART NO. | 螺纹 THREAD | | | | 尺寸 DIMENSIONS | |
|----------------|---------------|---------------|---------------|---------------|---------------|----|
| | T1 | T2 | T3 | T4 | L1,L2,L3,L4 | S1 |
| SZT-02 | Rc1/8 " X28 | Rc1/8 " X28 | Rc1/8 " X28 | Rc1/8 " X28 | 20 | 16 |
| SZT-04 | Rc1/4 " X19 | Rc1/4 " X19 | Rc1/4 " X19 | Rc1/4 " X19 | 22.5 | 19 |
| SZT-06 | Rc3/8 " X19 | Rc3/8 " X19 | Rc3/8 " X19 | Rc3/8 " X19 | 26 | 24 |
| SZT-08 | Rc1/2 " X14 | Rc1/2 " X14 | Rc1/2 " X14 | Rc1/2 " X14 | 31 | 27 |
| SZT-12 | Rc3/4 " X14 | Rc3/4 " X14 | Rc3/4 " X14 | Rc3/4 " X14 | 34 | 33 |
| SZT-16 | Rc1 " X11 | Rc1 " X11 | Rc1 " X11 | Rc1 " X11 | 42 | 41 |
| SZT-20 | Rc1.1/4 " X11 | Rc1.1/4 " X11 | Rc1.1/4 " X11 | Rc1.1/4 " X11 | 48 | 50 |

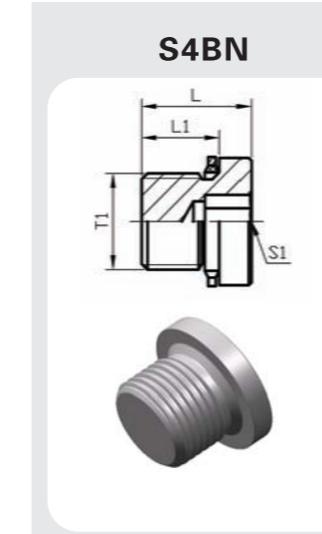

英管外螺纹六角端面组合垫密封内六角堵头
BSP MALE DOUBLE USE FOR BONDED SEAL INTERNAL HEX PLUG


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | |
|----------------|------------|--|--|---------------|----|----|
| | T1 | | | L | L1 | S1 |
| S4BN-02 | G1/8 " X28 | | | 11 | 8 | 5 |
| S4BN-04 | G1/4 " X19 | | | 15 | 12 | 6 |
| S4BN-06 | G3/8 " X19 | | | 15 | 12 | 8 |
| S4BN-08 | G1/2 " X14 | | | 18 | 14 | 10 |
| S4BN-12 | G3/4 " X14 | | | 20 | 16 | 12 |
| S4BN-16 | G1 " X11 | | | 21 | 16 | 17 |

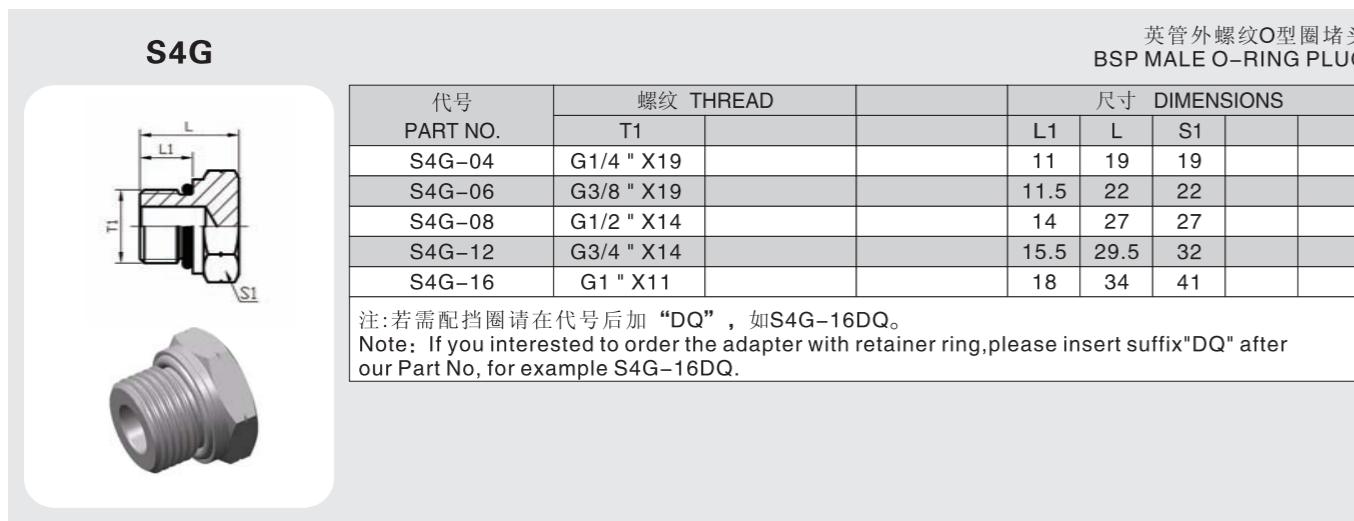

英管外螺纹O型圈堵头
BSP MALE O-RING PLUG


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | |
|----------------|------------|--|---------------|------|----|
| | T1 | | L1 | L | S1 |
| S4G-04 | G1/4 " X19 | | 11 | 19 | 19 |
| S4G-06 | G3/8 " X19 | | 11.5 | 22 | 22 |
| S4G-08 | G1/2 " X14 | | 14 | 27 | 27 |
| S4G-12 | G3/4 " X14 | | 15.5 | 29.5 | 32 |
| S4G-16 | G1 " X11 | | 18 | 34 | 41 |

注:若需配挡圈请在代号后加“DQ”，如S4G-16DQ。
Note: If you interested to order the adapter with retainer ring, please insert suffix "DQ" after our Part No, for example S4G-16DQ.

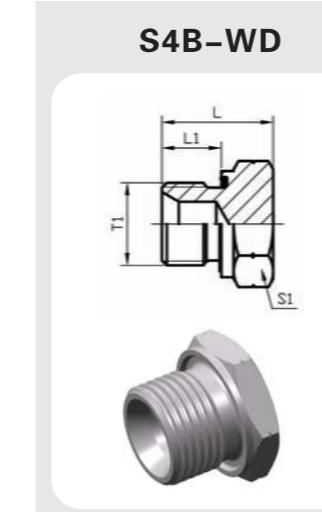


英管外螺纹胶垫密封堵头
BSP MALE CAPTIVE SEAL PLUG

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | |
|----------------|--------------|--|--|---------------|----|----|
| | T1 | | | L | L1 | S1 |
| S4B-02WD | G1/8 " X28 | | | 15.5 | 8 | 14 |
| S4B-04WD | G1/4 " X19 | | | 19.6 | 12 | 19 |
| S4B-06WD | G3/8 " X19 | | | 22.5 | 12 | 22 |
| S4B-08WD | G1/2 " X14 | | | 25 | 14 | 27 |
| S4B-12WD | G3/4 " X14 | | | 29 | 16 | 32 |
| S4B-16WD | G1 " X11 | | | 35 | 18 | 41 |
| S4B-20WD | G1.1/4 " X11 | | | 37 | 20 | 50 |
| S4B-24WD | G1.1/2 " X11 | | | 40 | 22 | 55 |

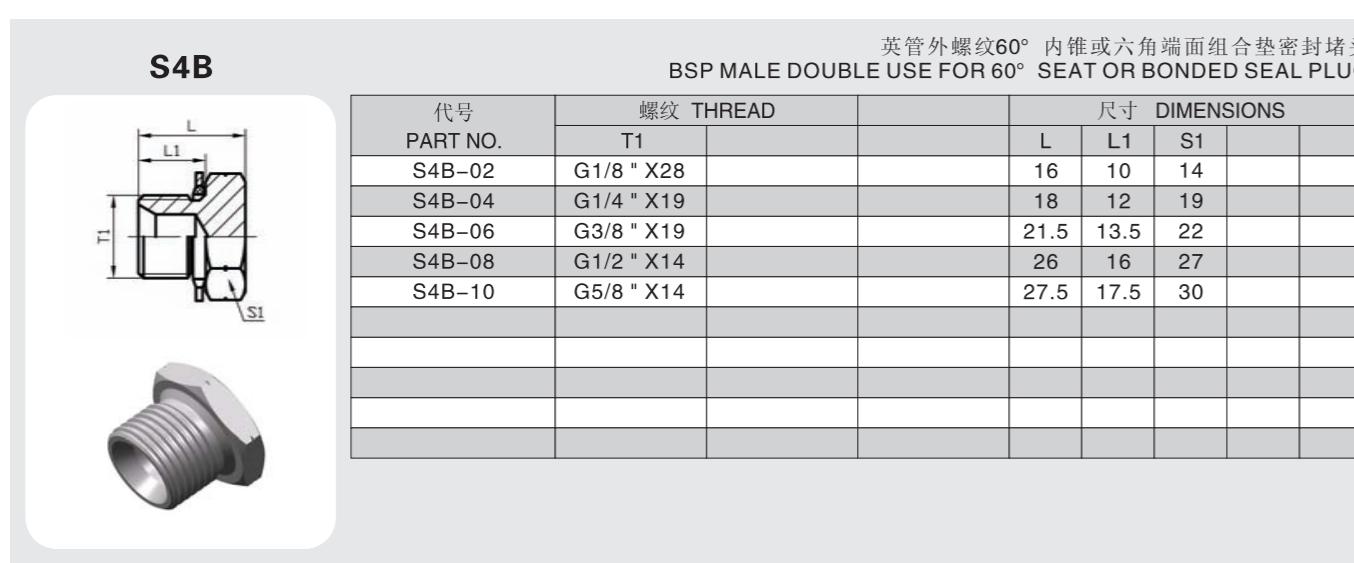


英管外螺纹60° 内锥或六角端面组合垫密封堵头
BSP MALE DOUBLE USE FOR 60° SEAT OR BONDED SEAL PLUG

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | |
|----------------|------------|--|---------------|------|----|
| | T1 | | L | L1 | S1 |
| S4B-02 | G1/8 " X28 | | 16 | 10 | 14 |
| S4B-04 | G1/4 " X19 | | 18 | 12 | 19 |
| S4B-06 | G3/8 " X19 | | 21.5 | 13.5 | 22 |
| S4B-08 | G1/2 " X14 | | 26 | 16 | 27 |
| S4B-10 | G5/8 " X14 | | 27.5 | 17.5 | 30 |


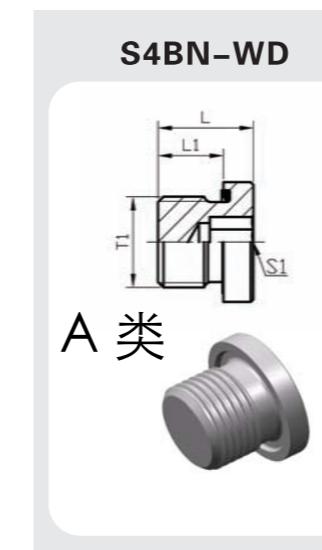


英管外螺纹胶垫密封内六角堵头
BSP MALE CAPTIVE SEAL INTERNAL HEX PLUG


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | |
|----------------|--------------|--|--|---------------|----|----|
| | T1 | | | L | L1 | S1 |
| S4BN-02WD | G1/8 " X28 | | | 12.2 | 8 | 5 |
| S4BN-04WD | G1/4 " X19 | | | 17.2 | 12 | 6 |
| S4BN-06WD | G3/8 " X19 | | | 17.2 | 12 | 8 |
| S4BN-08WD | G1/2 " X14 | | | 19.2 | 14 | 10 |
| S4BN-12WD | G3/4 " X14 | | | 21.2 | 16 | 12 |
| S4BN-16WD | G1 " X11 | | | 22.8 | 16 | 17 |
| S4BN-20WD | G1.1/4 " X11 | | | 26.8 | 20 | 22 |
| S4BN-24WD | G1.1/2 " X11 | | | 28.8 | 22 | 24 |

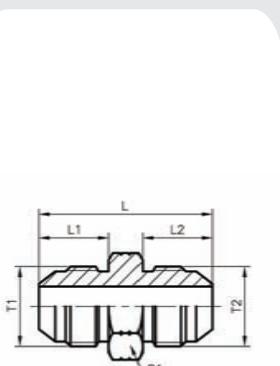S1J**A类**

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|--|---------------|------|------|----|---------|-------------|
| | T1 | T2 | | L1 | L2 | L3 | S1 | | |
| S1J-04 | 7/16 " X20 | 7/16 " X20 | | 14 | 14 | 34 | 12 | 23 | 34.5 |
| S1J-04-05 | 7/16 " X20 | 1/2 " X20 | | 14 | 14 | 34 | 14 | 26 | |
| S1J-04-06 | 7/16 " X20 | 9/16 " X18 | | 14 | 14.1 | 36 | 17 | 35 | |
| S1J-04-08 | 7/16 " X20 | 3/4 " X16 | | 14 | 16.7 | 38.5 | 22 | 60 | |
| S1J-05 | 1/2 " X20 | 1/2 " X20 | | 14 | 14 | 34.8 | 14 | 29 | |
| S1J-05-06 | 1/2 " X20 | 9/16 " X18 | | 14 | 14.1 | 34 | 17 | 35 | |
| S1J-05-08 | 1/2 " X20 | 3/4 " X16 | | 14 | 16.7 | 38.5 | 22 | 63 | |
| S1J-06 | 9/16 " X18 | 9/16 " X18 | | 14.1 | 14.1 | 34.2 | 17 | 35 | |
| S1J-06-08 | 9/16 " X18 | 3/4 " X16 | | 14.1 | 16.7 | 38.5 | 22 | 62 | |
| S1J-06-10 | 9/16 " X18 | 7/8 " X14 | | 14.1 | 19.3 | 41.5 | 24 | 81 | |
| S1J-08 | 3/4 " X16 | 3/4 " X16 | | 16.7 | 16.7 | 42 | 22 | 78 | 31 |
| S1J-08-10 | 3/4 " X16 | 7/8 " X14 | | 16.7 | 19.3 | 44 | 24 | 92 | 24 |
| S1J-08-12 | 3/4 " X16 | 1.1/16 " X12 | | 16.7 | 21.9 | 49 | 30 | 148 | |
| S1J-10 | 7/8 " X14 | 7/8 " X14 | | 19.3 | 19.3 | 46.5 | 24 | 102 | |
| S1J-10-12 | 7/8 " X14 | 1.1/16 " X12 | | 19.3 | 21.9 | 51 | 30 | 152 | |
| S1J-10-16 | 7/8 " X14 | 1.5/16 " X12 | | 19.3 | 23.1 | 53.5 | 36 | 219 | |
| S1J-12 | 1.1/16 " X12 | 1.1/16 " X12 | | 21.9 | 21.9 | 54 | 30 | 175 | |
| S1J-12-14 | 1.1/16 " X12 | 1.3/16 " X12 | | 21.9 | 22.6 | 55.5 | 32 | 203 | |
| S1J-12-16 | 1.1/16 " X12 | 1.5/16 " X12 | | 21.9 | 23.1 | 56.1 | 36 | 236 | |
| S1J-14 | 1.3/16 " X12 | 1.3/16 " X12 | | 22.6 | 22.6 | 56.1 | 32 | 239 | |
| S1J-14-16 | 1.3/16 " X12 | 1.5/16 " X12 | | 22.6 | 23.1 | 56.5 | 36 | 260 | |
| S1J-16 | 1.5/16 " X12 | 1.5/16 " X12 | | 23.1 | 23.1 | 57 | 36 | 257 | 21 |
| S1J-16-20 | 1.5/16 " X12 | 1.5/8 " X12 | | 23.1 | 24.3 | 60.5 | 46 | 384 | |
| S1J-16-24 | 1.5/16 " X12 | 1.7/8 " X12 | | 23.1 | 27.5 | 65.5 | 50 | 497 | |
| S1J-20 | 1.5/8 " X12 | 1.5/8 " X12 | | 24.3 | 24.3 | 62 | 46 | 422 | |
| S1J-20-24 | 1.5/8 " X12 | 1.7/8 " X12 | | 24.3 | 27.5 | 67 | 50 | 523 | |
| S1J-20-32 | 1.5/8 " X12 | 2.1/2 " X12 | | 24.3 | 33.9 | 75 | 65 | 978 | |
| S1J-24 | 1.7/8 " X12 | 1.7/8 " X12 | | 27.5 | 27.5 | 70 | 50 | 553 | |
| S1J-24-32 | 1.7/8 " X12 | 2.1/2 " X12 | | 27.5 | 33.9 | 78.5 | 65 | 896 | |
| S1J-32 | 2.1/2 " X12 | 2.1/2 " X12 | | 33.9 | 33.9 | 85 | 65 | 1150 | |

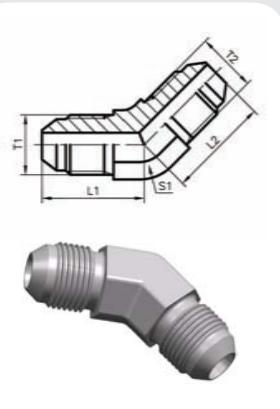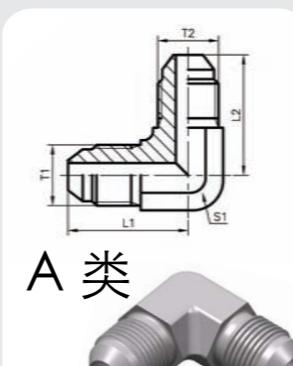
S1J4**S1J9****A类**

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|--|---------------|----|----|------|---------|-------------|
| | T1 | T2 | | L1 | L2 | S1 | | | |
| S1J9-04 | 7/16 " X20 | 7/16 " X20 | | | | | 23 | 23 | 11 27 |
| S1J9-05 | 1/2 " X20 | 1/2 " X20 | | | | | 24.5 | 24.5 | 14 35 |
| S1J9-06 | 9/16 " X18 | 9/16 " X18 | | | | | 26.9 | 26.9 | 14 46 |
| S1J9-08 | 3/4 " X16 | 3/4 " X16 | | | | | 32 | 32 | 19 100 |
| S1J9-10 | 7/8 " X14 | 7/8 " X14 | | | | | 37.8 | 37.8 | 22 146 |
| S1J9-12 | 1.1/16 " X12 | 1.1/16 " X12 | | | | | 44.2 | 44.2 | 27 246 |
| S1J9-14 | 1.3/16 " X12 | 1.3/16 " X12 | | | | | 47.5 | 47.5 | 30 361 |
| S1J9-16 | 1.5/16 " X12 | 1.5/16 " X12 | | | | | 46 | 46 | 33 363 |
| S1J9-20 | 1.5/8 " X12 | 1.5/8 " X12 | | | | | 55.5 | 55.5 | 41 363 |
| S1J9-24 | 1.7/8 " X12 | 1.7/8 " X12 | | | | | 62.5 | 62.5 | 48 863 |
| S1J9-32 | 2.1/2 " X12 | 2.1/2 " X12 | | | | | 78 | 78 | 63 1890 |

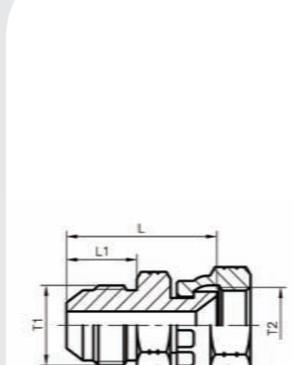S2J**A类**

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|----|---------------|---|------|------|---------|-------------|
| | | | | L1 | L | S1 | S2 | | |
| S2J-04 | 7/16 " X20 | 7/16 " X20 | | | | 14 | 28 | 12 | 14 17 |
| S2J-04-05 | 7/16 " X20 | 1/2 " X20 | | | | 14 | 28 | 12 | 17 19 |
| S2J-04-06 | 7/16 " X20 | 9/16 " X18 | | | | 14 | 28.5 | 14 | 19 23 |
| S2J-04-08 | 7/16 " X20 | 3/4 " X16 | | | | 14 | 30.5 | 19 | 24 31 |
| S2J-05 | 1/2 " X20 | 1/2 " X20 | | | | 14 | 28 | 14 | 17 24 |
| S2J-05-06 | 1/2 " X20 | 9/16 " X18 | | | | 14 | 28.5 | 14 | 19 25 |
| S2J-05-08 | 1/2 " X20 | 3/4 " X16 | | | | 14 | 30.5 | 19 | 24 33 |
| S2J-06 | 9/16 " X18 | 9/16 " X18 | | | | 14.1 | 28 | 17 | 19 32 |
| S2J-06-08 | 9/16 " X18 | 3/4 " X16 | | | | 14.1 | 31 | 19 | 24 36 |
| S2J-06-10 | 9/16 " X18 | 7/8 " X14 | | | | 14.1 | 33.5 | 22 | 27 49 |
| S2J-08 | 3/4 " X16 | 3/4 " X16 | | | | 16.7 | 36 | 22 | 24 61 |
| S2J-08-06 | 3/4 " X16 | 9/16 " X18 | | | | 16.7 | 34 | 22 | 19 63 |
| S2J-08-10 | 3/4 " X16 | 7/8 " X14 | | | | 16.7 | 36.5 | 22 | 27 64 |
| S2J-08-12 | 3/4 " X16 | 1.1/16 " X12 | | | | 16.7 | 39.5 | 27 | 32 90 |
| S2J-10 | 7/8 " X14 | 7/8 " X14 | | | | 19.3 | 39 | 24 | 27 82 |
| S2J-10-08 | 7/8 " X14 | 3/4 " X16 | | | | 19.3 | 38 | 24 | 24 79 |
| S2J-10-12 | 7/8 " X14 | 1.1/16 " X12 | | | | 19.3 | 42 | 27 | 32 100 |
| S2J-12 | 1.1/16 " X12 | 1.1/16 " X12 | </ | | | | | | |

S2J9

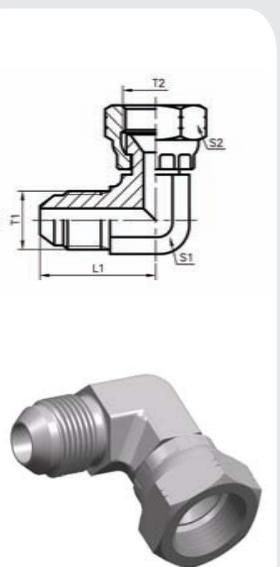


A类

90° 美制JIC外螺纹74° 外锥/JIC内螺纹74° 内锥
90° ELBOW JIC MALE 74° CONE/JIC FEMALE 74° SEAT

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|--|---------------|----|----|---------|-------------|
| | T1 | T2 | | L1 | S1 | S2 | | |
| S2J9-04 | 7/16 " X20 | 7/16 " X20 | | 22.6 | 11 | 14 | 20 | 34.5 |
| S2J9-05 | 1/2 " X20 | 1/2 " X20 | | 24.1 | 14 | 17 | 29 | |
| S2J9-06 | 9/16 " X18 | 9/16 " X18 | | 26.9 | 14 | 19 | 35 | |
| S2J9-06-08 | 9/16 " X18 | 3/4 " X16 | | 28.5 | 16 | 24 | 45 | |
| S2J9-08-06 | 3/4 " X16 | 9/16 " X18 | | 32 | 19 | 19 | 72 | 31 |
| S2J9-08 | 3/4 " X16 | 3/4 " X16 | | 32 | 19 | 24 | 79 | |
| S2J9-08-10 | 3/4 " X16 | 7/8 " X14 | | 32 | 19 | 27 | 88 | |
| S2J9-10 | 7/8 " X14 | 7/8 " X14 | | 36.8 | 22 | 27 | 112 | |
| S2J9-10-08 | 7/8 " X14 | 3/4 " X16 | | 36.8 | 22 | 24 | 102 | |
| S2J9-10-12 | 7/8 " X14 | 1.1/16 " X12 | | 39.5 | 24 | 32 | 137 | |
| S2J9-12 | 1.1/16 " X12 | 1.1/16 " X12 | | 42.2 | 27 | 32 | 183 | |
| S2J9-12-10 | 1.1/16 " X12 | 7/8 " X14 | | 42.2 | 27 | 27 | 163 | |
| S2J9-12-16 | 1.1/16 " X12 | 1.5/16 " X12 | | 46 | 30 | 41 | 216 | 21 |
| S2J9-14 | 1.3/16 " X12 | 1.3/16 " X12 | | 45.7 | 30 | 36 | 230 | |
| S2J9-16 | 1.5/16 " X12 | 1.5/16 " X12 | | 46 | 33 | 41 | 275 | |
| S2J9-16-20 | 1.5/16 " X12 | 1.5/8 " X12 | | 54 | 41 | 50 | 416 | |
| S2J9-20-16 | 1.5/8 " X12 | 1.5/16 " X12 | | 52.3 | 41 | 41 | 405 | |
| S2J9-20 | 1.5/8 " X12 | 1.5/8 " X12 | | 52.3 | 41 | 50 | 510 | |
| S2J9-20-24 | 1.5/8 " X12 | 1.7/8 " X12 | | 59.5 | 48 | 55 | 582 | 14 |
| S2J9-24-20 | 1.7/8 " X12 | 1.5/8 " X12 | | 62.5 | 48 | 50 | 658 | |
| S2J9-24 | 1.7/8 " X12 | 1.7/8 " X12 | | 62.5 | 48 | 55 | 685 | |
| S2J9-32 | 2.1/2 " X12 | 2.1/2 " X12 | | 78 | 63 | 75 | 1412 | 10.5 |

SAJ

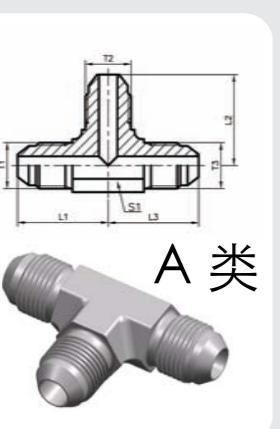


A类

美制JIC外螺纹74°外锥三通
JIC MALE 74° CONE TEE


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|--------------|---------------|------|------|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | | |
| SAJ-04 | 7/16 " X20 | 7/16 " X20 | 7/16 " X20 | 24.5 | 24.5 | 24.5 | 11 | 44 |
| SAJ-05 | 1/2 " X20 | 1/2 " X20 | 1/2 " X20 | 26 | 26 | 26 | 14 | 56 |
| SAJ-06 | 9/16 " X18 | 9/16 " X18 | 9/16 " X18 | 26.9 | 26.9 | 26.9 | 14 | 70 |
| SAJ-08 | 3/4 " X16 | 3/4 " X16 | 3/4 " X16 | 32 | 32 | 32 | 19 | 150 |
| SAJ-10 | 7/8 " X14 | 7/8 " X14 | 7/8 " X14 | 37.8 | 37.8 | 37.8 | 22 | 220 |
| SAJ-12 | 1.1/16 " X12 | 1.1/16 " X12 | 1.1/16 " X12 | 44.2 | 44.2 | 44.2 | 27 | 370 |
| SAJ-16 | 1.5/16 " X12 | 1.5/16 " X12 | 1.5/16 " X12 | 49 | 49 | 49 | 33 | 558 |
| SAJ-20 | 1.5/8 " X12 | 1.5/8 " X12 | 1.5/8 " X12 | 56.5 | 56.5 | 56.5 | 41 | 966 |
| SAJ-24 | 1.7/8 " X12 | 1.7/8 " X12 | 1.7/8 " X12 | 63 | 63 | 63 | 48 | 1305 |
| SAJ-32 | 2.1/2 " X12 | 2.1/2 " X12 | 2.1/2 " X12 | 78 | 78 | 78 | 63 | 2835 |

SBJ


美制JIC外螺纹74°外锥/美制JIC内螺纹74°内锥分支三通
JIC MALE 74° CONE/JIC FEMALE BRANCH TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|--------------|---------------|------|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | S1 | | |
| SBJ-04 | 7/16 " X20 | 7/16 " X20 | 7/16 " X20 | 22.6 | 22.6 | 11 | 14 | 35 |
| SBJ-05 | 1/2 " X20 | 1/2 " X20 | 1/2 " X20 | 24.1 | 24.1 | 14 | 17 | 49 |
| SBJ-06 | 9/16 " X18 | 9/16 " X18 | 9/16 " X18 | 26.9 | 26.9 | 14 | 19 | 61 |
| SBJ-08 | 3/4 " X16 | 3/4 " X16 | 3/4 " X16 | 32 | 32 | 19 | 24 | 121 |
| SBJ-10 | 7/8 " X14 | 7/8 " X14 | 7/8 " X14 | 36.8 | 36.8 | 22 | 27 | 192 |
| SBJ-12 | 1.1/16 " X12 | 1.1/16 " X12 | 1.1/16 " X12 | 42.2 | 42.2 | 27 | 32 | 315 |
| SBJ-14 | 1.3/16 " X12 | 1.3/16 " X12 | 1.3/16 " X12 | 45.7 | 45.7 | 30 | 36 | 385 |
| SBJ-16 | 1.5/16 " X12 | 1.5/16 " X12 | 1.5/16 " X12 | 46 | 46 | 33 | 41 | 477 |
| SBJ-20 | 1.5/8 " X12 | 1.5/8 " X12 | 1.5/8 " X12 | 52.3 | 52.3 | 41 | 50 | 876 |
| SBJ-24 | 1.7/8 " X12 | 1.7/8 " X12 | 1.7/8 " X12 | 62.5 | 62.5 | 48 | 55 | 114 |
| SBJ-32 | 2.1/2 " X12 | 2.1/2 " X12 | 2.1/2 " X12 | 78 | 78 | 63 | 75 | 2455 |


SCJ

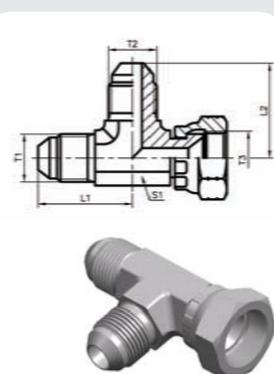美制JIC外螺纹74°外锥/美制JIC内螺纹74°内锥主支三通
JIC MALE 74° CONE/JIC FEMALE RUN TEE


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|--------------|---------------|------|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | S1 | | |
| SCJ-04 | 7/16 " X20 | 7/16 " X20 | 7/16 " X20 | 22.6 | 22.6 | 11 | 14 | 34 |
| SCJ-05 | 1/2 " X20 | 1/2 " X20 | 1/2 " X20 | 24.1 | 24.1 | 14 | 17 | 49 |
| SCJ-06 | 9/16 " X18 | 9/16 " X18 | 9/16 " X18 | 26.9 | 26.9 | 14 | 19 | 61 |
| SCJ-08 | 3/4 " X16 | 3/4 " X16 | 3/4 " X16 | 32 | 32 | 19 | 24 | 121 |
| SCJ-10 | 7/8 " X14 | 7/8 " X14 | 7/8 " X14 | 36.8 | 36.8 | 22 | 27 | 192 |
| SCJ-12 | 1.1/16 " X12 | 1.1/16 " X12 | 1.1/16 " X12 | 42.2 | 42.2 | 27 | 32 | 315 |
| SCJ-14 | 1.3/16 " X12 | 1.3/16 " X12 | 1.3/16 " X12 | 45.7 | 45.7 | 30 | 36 | 385 |
| SCJ-16 | 1.5/16 " X12 | 1.5/16 " X12 | 1.5/16 " X12 | 46 | 46 | 33 | 41 | 477 |
| SCJ-20 | 1.5/8 " X12 | 1.5/8 " X12 | 1.5/8 " X12 | 52.3 | 52.3 | 41 | 50 | 876 |
| SCJ-24 | 1.7/8 " X12 | 1.7/8 " X12 | 1.7/8 " X12 | 62.5 | | | | |

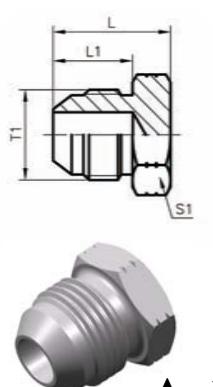S4J**A类**美制JIC外螺纹74° 外锥堵头
JIC MALE 74° CONE PLUG


| 代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|---------------|------|----|------|----------|
| | | T1 | L1 | L | | |
| S4J-04 | 7/16" X20 | 14 | 20.3 | 12 | 15 | 34.5 |
| S4J-05 | 1/2" X20 | 14 | 20.3 | 14 | 19 | 34.5 |
| S4J-06 | 9/16" X18 | 14.1 | 20.3 | 17 | 24 | |
| S4J-08 | 3/4" X16 | 16.7 | 23.9 | 22 | 50 | 31 |
| S4J-10 | 7/8" X14 | 19.3 | 27.9 | 24 | 71 | 24 |
| S4J-12 | 1.1/16" X12 | 21.9 | 32.5 | 30 | 126 | |
| S4J-14 | 1.3/16" X12 | 22.6 | 33.3 | 32 | 148 | 21 |
| S4J-16 | 1.5/16" X12 | 23.1 | 34 | 36 | 187 | 21 |
| S4J-20 | 1.5/8" X12 | 24.3 | 36.8 | 46 | 317 | 17 |
| S4J-24 | 1.7/8" X12 | 27.5 | 42 | 50 | 434 | 14 |
| S4J-32 | 2.1/2" X12 | 33.9 | 52 | 65 | 926 | 10.5 |

E**S6J-LN**美制JIC外螺纹74° 外锥过板接头
JIC MALE 74° CONE BULKHEAD


| 代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|---------------|------|------|-------|----|------|----------|
| | | T1 | T2 | L1 | L2 | L | S1 | S2 |
| S6J-04LN | 7/16" X20 | 7/16" X20 | 14 | 30.5 | 52.6 | 17 | 17 | 52 |
| S6J-05LN | 1/2" X20 | 1/2" X20 | 14 | 30.5 | 52.6 | 19 | 19 | 64 |
| S6J-06LN | 9/16" X18 | 9/16" X18 | 14.1 | 32.5 | 55.4 | 22 | 22 | 82 |
| S6J-08LN | 3/4" X16 | 3/4" X16 | 16.7 | 36.5 | 62 | 24 | 24 | 131 |
| S6J-10LN | 7/8" X14 | 7/8" X14 | 19.3 | 40.1 | 69.6 | 30 | 30 | 201 |
| S6J-12LN | 1.1/16" X12 | 1.1/16" X12 | 21.9 | 44.4 | 78.5 | 36 | 36 | 332 |
| S6J-14LN | 1.3/16" X12 | 1.3/16" X12 | 22.6 | 44.4 | 79.2 | 38 | 38 | 371 |
| S6J-16LN | 1.5/16" X12 | 1.5/16" X12 | 23.1 | 44.4 | 79.8 | 41 | 41 | 441 |
| S6J-20LN | 1.5/8" X12 | 1.5/8" X12 | 24.3 | 45.7 | 84.1 | 50 | 50 | 672 |
| S6J-24LN | 1.7/8" X12 | 1.7/8" X12 | 27.5 | 46 | 89.4 | 55 | 55 | 835 |
| S6J-32LN | 2.1/2" X12 | 2.1/2" X12 | 33.9 | 53.1 | 106.7 | 70 | 70 | 1602 |
| | | | | | | | | 10.5 |

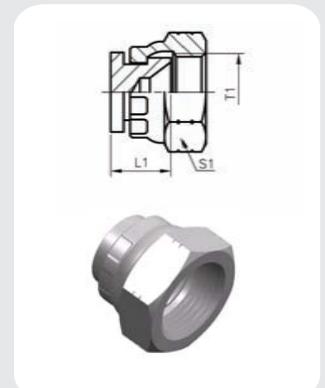E**S9J****A类**美制JIC内螺纹74° 内锥堵头
JIC FEMALE 74° SEAT PLUG

| 代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | 重量 g | 工作压力 Mpa |
|----------------|-------------|---------------|----|------|----------|
| | | T1 | L1 | S1 | |
| S9J-04 | 7/16" X20 | 9 | 14 | 5 | 34.5 |
| S9J-05 | 1/2" X20 | 9.5 | 17 | 7 | |
| S9J-06 | 9/16" X18 | 10.5 | 19 | 10 | |
| S9J-08 | 3/4" X16 | 11 | 24 | 17 | 31 |
| S9J-10 | 7/8" X14 | 13 | 27 | 28 | 24 |
| S9J-12 | 1.1/16" X12 | 15 | 32 | 46 | |
| S9J-14 | 1.3/16" X12 | 15 | 36 | 58 | 21 |
| S9J-16 | 1.5/16" X12 | 16 | 41 | 75 | |
| S9J-20 | 1.5/8" X12 | 17 | 50 | 125 | 17 |
| S9J-24 | 1.7/8" X12 | 20 | 55 | 181 | 14 |
| S9J-32 | 2.1/2" X12 | 23.5 | 75 | 345 | 10.5 |


美制**S6J4-LN**45° 弯美制JIC外螺纹74° 外锥过板接头
45° ELBOW JIC MALE 74° CONE BULKHEAD

| 代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|---------------|------|------|------|----|------|----------|
| | | T1 | T2 | L1 | L2 | L3 | S1 | S2 |
| S6J4-04LN | 7/16" X20 | 7/16" X20 | 18.5 | 38.9 | 26 | 11 | 17 | 46 |
| S6J4-05LN | 1/2" X20 | 1/2" X20 | 19.6 | 42.2 | 26 | 14 | 19 | 60 |
| S6J4-06LN | 9/16" X18 | 9/16" X18 | 21.1 | 42.4 | 27.7 | 14 | 22 | 75 |
| S6J4-08LN | 3/4" X16 | 3/4" X16 | 25 | 49.3 | 31.7 | 19 | 24 | 143 |
| S6J4-10LN | 7/8" X14 | 7/8" X14 | 28.5 | 55.1 | 35.3 | 22 | 30 | 205 |
| S6J4-12LN | 1.1/16" X12 | 1.1/16" X12 | 32.5 | 62 | 39.5 | 27 | 36 | 300 |
| S6J4-16LN | 1.5/16" X12 | 1.5/16" X12 | 37.5 | 65 | 39.5 | 33 | 41 | 455 |
| S6J4-20LN | 1.5/8" X12 | 1.5/8" X12 | 40.5 | 67.3 | 41 | 41 | 50 | 658 |
| | | | | | | | | 17 |

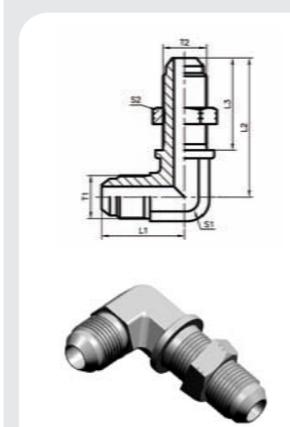美制**S6J9-LN**90° 弯美制JIC外螺纹74° 外锥过板接头
90° ELBOW JIC MALE 74° CONE BULKHEAD

| 代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|---------------|------|------|------|----|------|----------|
| | | T1 | T2 | L1 | L2 | L3 | S1 | S2 |
| S6J9-04LN | 7/16" X20 | 7/16" X20 | 24.6 | 40.4 | 26 | 11 | 17 | 48 |
| S6J9-05LN | 1/2" X20 | 1/2" X20 | 26.9 | 43.7 | 26 | 14 | 19 | 62 |
| S6J9-06LN | 9/16" X18 | 9/16" X18 | 27.7 | 46 | 27.7 | 14 | 22 | 77 |
| S6J9-08LN | 3/4" X16 | 3/4" X16 | 34.5 | 53.6 | 31.7 | 19 | 24 | 150 |
| S6J9-10LN | 7/8" X14 | 7/8" X14 | 39.6 | 60.7 | 35.3 | 22 | 30 | 222 |
| S6J9-12LN | 1.1/16" X12 | 1.1/16" X12 | 45.2 | 67.8 | 39.5 | 27 | 36 | 360 |
| S6J9-14LN | 1.3/16" X12 | 1.3/16" X12 | 48.8 | 71.1 | 39.5 | 33 | 38 | 433 |
| S6J9-16LN | 1.5/16" X12 | 1.5/16" X1 | | | | | | |

S1JFL

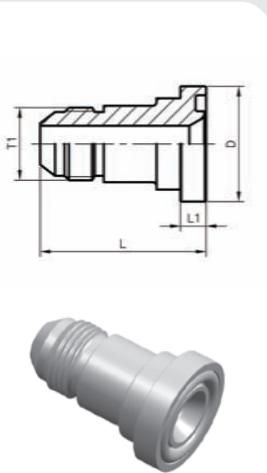美制JIC外螺纹74° 外锥/轻系列法兰ISO 6162-1
JIC MALE 74° CONE/L-SERIES FLANGE ISO 6162-1


| 代号 PART NO. | 螺纹 THREAD T1 | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|-----------------|---------------------|---------------|------|------|---------|-------------|
| | | | L1 | D | L | | |
| S1JFL-08 | 3/4 " X16 | 1/2 " | 6.73 | 30.2 | 43.5 | 103 | 34.5 |
| S1JFL-08-12 | 3/4 " X16 | 3/4 " | 6.73 | 38.1 | 45.4 | 130 | |
| S1JFL-10-08 | 7/8 " X14 | 1/2 " | 6.73 | 30.2 | 48 | 127 | |
| S1JFL-10-12 | 7/8 " X14 | 3/4 " | 6.73 | 38.1 | 48 | 150 | |
| S1JFL-12-08 | 1.1/16 " X12 | 1/2 " | 6.73 | 30.2 | 49 | 167 | |
| S1JFL-12 | 1.1/16 " X12 | 3/4 " | 6.73 | 38.1 | 50.5 | 196 | |
| S1JFL-12-16 | 1.1/16 " X12 | 1 " | 8 | 44.4 | 52.2 | 234 | |
| S1JFL-16-12 | 1.5/16 " X12 | 3/4 " | 6.73 | 38.1 | 52 | 254 | |
| S1JFL-16 | 1.5/16 " X12 | 1 " | 8 | 44.4 | 53.4 | 290 | |
| S1JFL-16-20 | 1.5/16 " X12 | 1.1/4 " | 8 | 50.8 | 52.2 | 316 | |
| S1JFL-20-16 | 1.5/8 " X12 | 1 " | 8 | 44.4 | 54.5 | 376 | |
| S1JFL-20 | 1.5/8 " X12 | 1.1/4 " | 8 | 50.8 | 53.1 | 398 | |
| S1JFL-20-24 | 1.5/8 " X12 | 1.1/2 " | 8 | 60.3 | 56 | 472 | |
| S1JFL-24-20 | 1.7/8 " X12 | 1.1/4 " | 8 | 50.8 | 56.5 | 471 | |
| S1JFL-24 | 1.7/8 " X12 | 1.1/2 " | 8 | 60.3 | 59.2 | 547 | |
| S1JFL-24-32 | 1.7/8 " X12 | 2 " | 9.53 | 71.4 | 60 | 657 | |
| S1JFL-32 | 2.1/2 " X12 | 2 " | 9.53 | 71.4 | 66.3 | 1002 | |

S1JFS

美制JIC外螺纹74° 外螺纹/重系列法兰ISO 6162-2
JIC MALE 74° CONE/S-SERIES FLANGE ISO 6162-2


| 代号 PART NO. | 螺纹 THREAD T1 | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|-----------------|---------------------|---------------|------|------|---------|-------------|
| | | | L1 | D | L | | |
| S1JFS-08 | 3/4 " X16 | 1/2 " | 7.75 | 31.7 | 47.5 | 70 | 31 |
| S1JFS-10-08 | 7/8 " X14 | 1/2 " | 7.75 | 31.7 | 50 | 90 | |
| S1JFS-10-12 | 7/8 " X14 | 3/4 " | 8.76 | 41.3 | 55 | 99 | |
| S1JFS-12 | 1.1/16 " X12 | 3/4 " | 8.76 | 41.3 | 56.7 | 146 | |
| S1JFS-12-16 | 1.1/16 " X12 | 1 " | 9.53 | 47.6 | 61.5 | 158 | |
| S1JFS-16-12 | 1.5/16 " X12 | 3/4 " | 8.76 | 41.3 | 57.8 | 205 | |
| S1JFS-16 | 1.5/16 " X12 | 1 " | 9.53 | 47.6 | 62.8 | 224 | |
| S1JFS-16-20 | 1.5/16 " X12 | 1.1/4 " | 10.29 | 54 | 67.7 | 241 | |
| S1JFS-20-16 | 1.5/8 " X12 | 1 " | 9.53 | 47.6 | 64 | 234 | |
| S1JFS-20 | 1.5/8 " X12 | 1.1/4 " | 10.29 | 54 | 68.9 | 349 | |
| S1JFS-20-24 | 1.5/8 " X12 | 1.1/2 " | 12.57 | 63.5 | 73.5 | 356 | |
| S1JFS-24-20 | 1.7/8 " X12 | 1.1/4 " | 10.29 | 54 | 72 | 432 | |
| S1JFS-24 | 1.7/8 " X12 | 1.1/2 " | 12.57 | 63.5 | 76.7 | 438 | |

S1JFL9

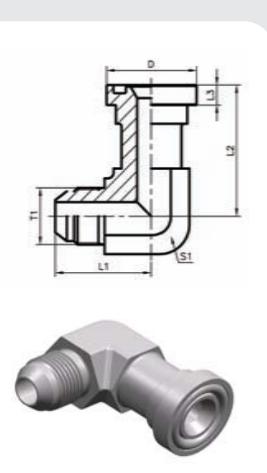90° 弯美制JIC外螺纹74° 外锥/轻系列法兰ISO 6162-1
90° ELBOW JIC MALE 74° CONE/L-SERIES FLANGE ISO 6162-1


| 代号 PART NO. | 螺纹 THREAD T1 | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | | | 重量 g | 工作压力 Mpa |
|----------------|-----------------|---------------------|---------------|------|------|------|----|---------|-------------|
| | | | L1 | L2 | L3 | D | S1 | | |
| S1JFL9-08 | 3/4 " X16 | 1/2 " | 32.5 | 44 | 6.73 | 30.2 | 24 | 167 | 31 |
| S1JFL9-08-12 | 3/4 " X16 | 3/4 " | 38 | 54.1 | 6.73 | 38.1 | 30 | | |
| S1JFL9-10-08 | 7/8 " X14 | 1/2 " | 37.5 | 44 | 6.73 | 30.2 | 24 | | |
| S1JFL9-10-12 | 7/8 " X14 | 3/4 " | 41 | 54.1 | 6.73 | 38.1 | 30 | | |
| S1JFL9-12 | 1.1/16 " X12 | 3/4 " | 44.5 | 54.1 | 6.73 | 38.1 | 30 | | |
| S1JFL9-12-16 | 1.1/16 " X12 | 1 " | 48 | 60.2 | 8 | 44.4 | 33 | | |
| S1JFL9-16 | 1.5/16 " X12 | 1 " | 49 | 60.2 | 8 | 44.4 | 33 | | |
| S1JFL9-16-12 | 1.5/16 " X12 | 3/4 " | 49 | 54.1 | 6.73 | 38.1 | 30 | | |
| S1JFL9-16-20 | 1.5/16 " X12 | 1.1/4 " | 54 | 66.5 | 8 | 50.8 | 41 | | |
| S1JFL9-20 | 1.5/8 " X12 | 1.1/4 " | 55.5 | 66.5 | 8 | 50.8 | 41 | | |
| S1JFL9-20-24 | 1.5/8 " X12 | 1.1/2 " | 60 | 79.3 | 8 | 60.3 | 50 | | |
| S1JFL9-24 | 1.7/8 " X12 | 1.1/2 " | 62.5 | 79.3 | 8 | 60.3 | 50 | | |
| S1JFL9-24-32 | 1.7/8 " X12 | 2 " | 74.5 | 108 | 9.53 | 71.4 | 60 | | |
| S1JFL9-32 | 2.1/2 " X12 | 2 " | 80 | 108 | 9.53 | 71.4 | 60 | | |

S1JFS9

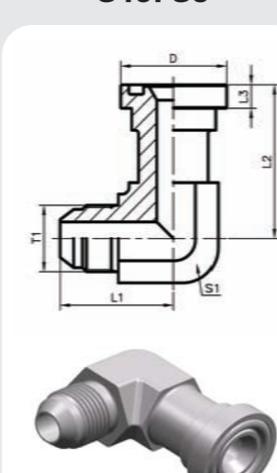90° 弯美制JIC外螺纹74° 外螺纹/重系列法兰ISO 6162-2
90° JIC MALE 74° CONE/S-SERIES FLANGE ISO 6162-2


| 代号 PART NO. | 螺纹 THREAD T1 | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | | | 重量 g | 工作压力 Mpa |
|----------------|-----------------|---------------------|---------------|------|-------|------|----|---------|-------------|
| | | | L1 | L2 | L3 | D | S1 | | |
| S1JFS9-08 | 3/4 " X16 | 1/2 " | 32.5 | 44 | 7.75 | 31.7 | 24 | 185 | 31 |
| S1JFS9-10-08 | 7/8 " X14 | 1/2 " | 37.5 | 44 | 7.75 | 31.7 | 24 | | |
| S1JFS9-10-12 | 7/8 " X14 | 3/4 " | 41 | 54.1 | 8.76 | 41.3 | 30 | | |
| S1JFS9-12 | 1.1/16 " X12 | 3/4 " | 44.2 | 54.1 | 8.76 | 41.3 | 30 | | |
| S1JFS9-12-16 | 1.1/16 " X12 | 1 " | 48 | 60.2 | 9.53 | 47.6 | 33 | | |
| S1JFS9-16 | 1.5/16 " X12 | 1 " | 51.5 | 60.2 | 9.53 | 47.6 | 33 | | |
| S1JFS9-16-12 | 1.5/16 " X12 | 3/4 " | 49 | 54.1 | 8.76 | 41.3 | 30 | | |
| S1JFS9-16-20 | 1.5/16 " X12 | 1.1/4 " | 54 | 66.5 | 10.29 | | | | |

S1JN

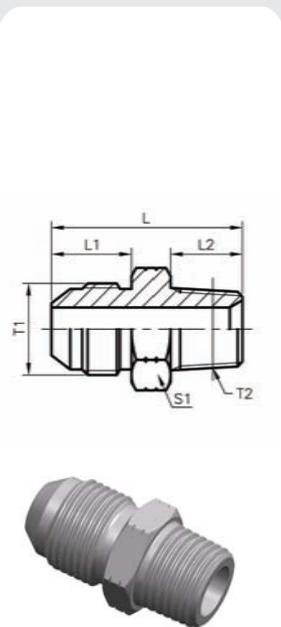

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|-----------------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1JN-04-02 | 7/16" X20 | NPT1/8" X27 | 14 | 10.5 | 31 | 12 | 18 | 34.5 |
| S1JN-04 | 7/16" X20 | NPT1/4" X18 | 14 | 15 | 36 | 17 | 30 | 27.5 |
| S1JN-04-06 | 7/16" X20 | NPT3/8" X18 | 14 | 16 | 36 | 19 | 39 | 21 |
| S1JN-04-08 | 7/16" X20 | NPT1/2" X14 | 14 | 19.5 | 43 | 22 | 74 | 27.5 |
| S1JN-05-04 | 1/2" X20 | NPT1/4" X18 | 14 | 15 | 36 | 17 | 32 | |
| S1JN-05-06 | 1/2" X20 | NPT3/8" X18 | 14 | 16 | 37 | 19 | 42 | 21 |
| S1JN-05-08 | 1/2" X20 | NPT1/2" X14 | 14 | 19.5 | 43 | 22 | 75 | |
| S1JN-06-04 | 9/16" X18 | NPT1/4" X18 | 14.1 | 15 | 36.5 | 17 | 33 | 27.5 |
| S1JN-06 | 9/16" X18 | NPT3/8" X18 | 14.1 | 16 | 36.5 | 19 | 41 | |
| S1JN-06-08 | 9/16" X18 | NPT1/2" X14 | 14.1 | 19.5 | 42.9 | 22 | 73 | 21 |
| S1JN-08-04 | 3/4" X16 | NPT1/4" X18 | 16.7 | 15 | 39 | 22 | 56 | 27.5 |
| S1JN-08-06 | 3/4" X16 | NPT3/8" X18 | 16.7 | 16 | 39 | 22 | 60 | |
| S1JN-08 | 3/4" X16 | NPT1/2" X14 | 16.7 | 19.5 | 44 | 24 | 80 | 21 |
| S1JN-08-12 | 3/4" X16 | NPT3/4" X14 | 16.7 | 19.5 | 47 | 30 | 125 | 17 |
| S1JN-10-06 | 7/8" X14 | NPT3/8" X18 | 19.3 | 16 | 43.5 | 24 | 80 | |
| S1JN-10-08 | 7/8" X14 | NPT1/2" X14 | 19.3 | 19.5 | 48 | 24 | 93 | 21 |
| S1JN-10-12 | 7/8" X14 | NPT3/4" X14 | 19.3 | 19.5 | 49.5 | 30 | 127 | 17 |
| S1JN-12-08 | 1.1/16" X12 | NPT1/2" X14 | 21.9 | 19.5 | 52.3 | 30 | 142 | 21 |
| S1JN-12 | 1.1/16" X12 | NPT3/4" X14 | 21.9 | 19.5 | 52.3 | 30 | 147 | 17 |
| S1JN-12-16 | 1.1/16" X12 | NPT1" X11.5 | 21.9 | 25.5 | 57.1 | 36 | 213 | 14 |
| S1JN-12-20 | 1.1/16" X12 | NPT1.1/4" X11.5 | 21.9 | 26.5 | 61.5 | 46 | 358 | 8 |
| S1JN-14-12 | 1.3/16" X12 | NPT3/4" X14 | 22.6 | 19.5 | 53 | 32 | 170 | |
| S1JN-16-12 | 1.5/16" X12 | NPT3/4" X14 | 23.1 | 19.5 | 53.5 | 36 | 206 | 17 |
| S1JN-16 | 1.5/16" X12 | NPT1" X11.5 | 23.1 | 25.5 | 58.5 | 36 | 242 | 14 |
| S1JN-16-20 | 1.5/16" X12 | NPT1.1/4" X11.5 | 23.1 | 26.5 | 62.5 | 46 | 370 | 8 |
| S1JN-16-24 | 1.5/16" X12 | NPT1.1/2" X11.5 | 23.1 | 27.5 | 65.5 | 50 | 468 | 7 |
| S1JN-20-16 | 1.5/8" X12 | NPT1" X11.5 | 24.3 | 25.5 | 61.5 | 46 | 343 | 14 |
| S1JN-20 | 1.5/8" X12 | NPT1.1/4" X11.5 | 24.3 | 26.5 | 62.2 | 46 | 385 | 8 |
| S1JN-20-24 | 1.5/8" X12 | NPT1.1/2" X11.5 | 24.3 | 27.5 | 67 | 50 | 492 | 7 |
| S1JN-24-20 | 1.7/8" X12 | NPT1.1/4" X11.5 | 27.5 | 26.5 | 67.3 | 50 | 475 | 8 |
| S1JN-24 | 1.7/8" X12 | NPT1.1/2" X11.5 | 27.5 | 27.5 | 68 | 50 | 501 | 7 |
| S1JN-24-32 | 1.7/8" X12 | NPT2" X11.5 | 27.5 | 27.5 | 72 | 65 | 747 | 5 |
| S1JN-32 | 2.1/2" X12 | NPT2" X11.5 | 33.9 | 27.5 | 79 | 65 | 903 | 5 |
| S1JN-32-24 | 2.1/2" X12 | NPT1.1/2" X11.5 | 33.9 | 27.5 | 78.5 | 65 | 930 | 7 |


S1JN4

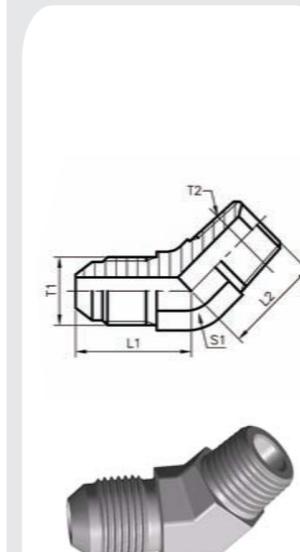

| 45° 弯美制JIC外螺纹74° 外锥/布锥管外螺纹 45° ELBOW JIC MALE 74° CONE/NPT MALE | | | | | | | | |
|--|-------------|-----------------|---------------|------|----|-----|---------|-------------|
| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1JN4-04-02 | 7/16" X20 | NPT1/8" X27 | 18.3 | 16.5 | 11 | 18 | 34.5 | |
| S1JN4-04 | 7/16" X20 | NPT1/4" X18 | 22 | 21 | 14 | 28 | 27.5 | |
| S1JN4-04-06 | 7/16" X20 | NPT3/8" X18 | 23 | 24 | 19 | 41 | | 21 |
| S1JN4-04-08 | 7/16" X20 | NPT1/2" X14 | 24.5 | 29.5 | 22 | 68 | | |
| S1JN4-05-02 | 1/2" X20 | NPT1/8" X27 | 19.6 | 16.5 | 14 | 22 | 34.5 | |
| S1JN4-05-04 | 1/2" X20 | NPT1/4" X18 | 22 | 21 | 14 | 31 | 27.5 | |
| S1JN4-06-02 | 9/16" X18 | NPT1/8" X27 | 22 | 17.3 | 14 | 28 | 34.5 | |
| S1JN4-06-04 | 9/16" X18 | NPT1/4" X18 | 22.8 | 21 | 14 | 35 | 27.5 | |
| S1JN4-06 | 9/16" X18 | NPT3/8" X18 | 22 | 24 | 19 | 45 | | 21 |
| S1JN4-06-08 | 9/16" X18 | NPT1/2" X14 | 22.5 | 29.5 | 22 | 70 | | |
| S1JN4-08-04 | 3/4" X16 | NPT1/4" X18 | 25 | 24 | 19 | 56 | 27.5 | |
| S1JN4-08-06 | 3/4" X16 | NPT3/8" X18 | 24.9 | 24.1 | 19 | 65 | | 21 |
| S1JN4-08 | 3/4" X16 | NPT1/2" X14 | 25 | 29.5 | 22 | 45 | | |
| S1JN4-08-12 | 3/4" X16 | NPT3/4" X14 | 26.5 | 30.5 | 27 | 118 | 17 | |
| S1JN4-10-08 | 7/8" X14 | NPT1/2" X14 | 28.2 | 29.7 | 22 | 101 | 21 | |
| S1JN4-10-12 | 7/8" X14 | NPT3/4" X14 | 29.5 | 30.5 | 27 | 130 | 17 | |
| S1JN4-12-08 | 1.1/16" X12 | NPT1/2" X14 | 32.5 | 31 | 27 | 141 | 21 | |
| S1JN4-12 | 1.1/16" X12 | NPT3/4" X14 | 32.5 | 30.5 | 27 | 162 | 17 | |
| S1JN4-12-16 | 1.1/16" X12 | NPT1" X11.5 | 37.5 | 39 | 33 | 244 | 14 | |
| S1JN4-14-12 | 1.3/16" X12 | NPT3/4" X14 | 37 | 33 | 30 | 198 | | 17 |
| S1JN4-16-12 | 1.5/16" X12 | NPT3/4" X14 | 38.5 | 36.5 | 33 | 240 | | |
| S1JN4-16 | 1.5/16" X12 | NPT1" X11.5 | 37.3 | 37.6 | 33 | 285 | 14 | |
| S1JN4-16-20 | 1.5/16" X12 | NPT1.1/4" X11.5 | 42 | 42.5 | 41 | 402 | 8 | |
| S1JN4-20-16 | 1.5/8" X12 | NPT1" X11.5 | 43 | 42.5 | 41 | 395 | 14 | |
| S1JN4-20 | 1.5/8" X12 | NPT1.1/4" X11.5 | 40.5 | 42.5 | 41 | 462 | 8 | |
| S1JN4-20-24 | 1.5/8" X12 | NPT1.1/2" X11.5 | 46 | 45 | 48 | 570 | | 7 |
| S1JN4-24 | 1.7/8" X12 | NPT1.1/2" X11.5 | 45.2 | 45 | 48 | 617 | | |


美
制美
制

S1JN9

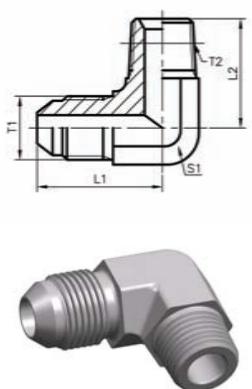90° 弯美制JIC外螺纹74° 外锥/布锥管外螺纹
90° ELBOW JIC MALE 74° CONE/NPT MALE


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|------------------|---------------|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | | |
| S1JN9-04 | 7/16 " X20 | NPT1/4 " X18 | 26.6 | 27.7 | 14 | 35 | 27.5 |
| S1JN9-04-02 | 7/16 " X20 | NPT1/8 " X27 | 23 | 20.5 | 11 | 23 | 34.5 |
| S1JN9-04-06 | 7/16 " X20 | NPT3/8 " X18 | 29 | 31 | 16 | 51 | 21 |
| S1JN9-05-04 | 1/2 " X20 | NPT1/4 " X18 | 24.5 | 27.7 | 14 | 38 | 27.5 |
| S1JN9-05-06 | 1/2 " X20 | NPT3/8 " X18 | 29 | 31 | 16 | 55 | 21 |
| S1JN9-06 | 9/16 " X18 | NPT3/8 " X18 | 29 | 31 | 16 | 59 | |
| S1JN9-06-04 | 9/16 " X18 | NPT1/4 " X18 | 26.9 | 27.7 | 14 | 43 | 27.5 |
| S1JN9-06-08 | 9/16 " X18 | NPT1/2 " X14 | 31 | 37.3 | 22 | 85 | |
| S1JN9-08 | 3/4 " X16 | NPT1/2 " X14 | 34.8 | 37.3 | 22 | 114 | 21 |
| S1JN9-08-04 | 3/4 " X16 | NPT1/4 " X18 | 32 | 31 | 19 | 71 | 27.5 |
| S1JN9-08-06 | 3/4 " X16 | NPT3/8 " X18 | 32 | 31 | 19 | 84 | 21 |
| S1JN9-08-12 | 3/4 " X16 | NPT3/4 " X14 | 36.1 | 40.4 | 27 | 151 | 17 |
| S1JN9-10-06 | 7/8 " X14 | NPT3/8 " X18 | 37 | 32.5 | 22 | 107 | 21 |
| S1JN9-10-08 | 7/8 " X14 | NPT1/2 " X14 | 37 | 37.3 | 22 | 130 | |
| S1JN9-10-12 | 7/8 " X14 | NPT3/4 " X14 | 39.2 | 40.4 | 27 | 170 | 17 |
| S1JN9-10-16 | 7/8 " X14 | NPT1 " X11.5 | 44.5 | 50 | 33 | 259 | 14 |
| S1JN9-12 | 1.1/16 " X12 | NPT3/4 " X14 | 42.5 | 40.5 | 27 | 214 | 17 |
| S1JN9-12-08 | 1.1/16 " X12 | NPT1/2 " X14 | 42.5 | 40.4 | 27 | 182 | 21 |
| S1JN9-12-16 | 1.1/16 " X12 | NPT1 " X11.5 | 45 | 50 | 33 | 298 | 14 |
| S1JN9-12-20 | 1.1/16 " X12 | NPT1.1/4 " X11.5 | 52.5 | 54.5 | 41 | 442 | 8 |
| S1JN9-14-12 | 1.3/16 " X12 | NPT3/4 " X14 | 46 | 43 | 30 | 250 | 17 |
| S1JN9-14-16 | 1.3/16 " X12 | NPT1 " X11.5 | 48.7 | 50 | 33 | 330 | 14 |
| S1JN9-16 | 1.5/16 " X12 | NPT1 " X11.5 | 46 | 50 | 33 | 354 | |
| S1JN9-16-12 | 1.5/16 " X12 | NPT3/4 " X14 | 46 | 45.2 | 33 | 287 | 17 |
| S1JN9-16-20 | 1.5/16 " X12 | NPT1.1/4 " X11.5 | 54 | 60.5 | 41 | 541 | 8 |
| S1JN9-16-24 | 1.5/16 " X12 | NPT1.1/2 " X11.5 | 59.4 | 59.5 | 48 | 637 | 7 |
| S1JN9-20 | 1.5/8 " X12 | NPT1.1/4 " X11.5 | 52.3 | 60.5 | 41 | 626 | 8 |
| S1JN9-20-16 | 1.5/8 " X12 | NPT1 " X11.5 | 53 | 59.5 | 41 | 507 | 14 |
| S1JN9-20-24 | 1.5/8 " X12 | NPT1.1/2 " X11.5 | 56 | 67 | 48 | 774 | 7 |
| S1JN9-24 | 1.7/8 " X12 | NPT1.1/2 " X11.5 | 62.5 | 63 | 48 | 858 | |
| S1JN9-24-20 | 1.7/8 " X12 | NPT1.1/4 " X11.5 | 59 | 57 | 48 | 717 | 8 |
| S1JN9-32-24 | 2.1/2 " X12 | NPT1.1/2 " X11.5 | 77.7 | 70 | 63 | 1415 | 7 |
| S1JN9-32 | 2.1/2 " X12 | NPT2 " X11.5 | 77.7 | 76.2 | 63 | 1615 | 5 |

S1JN9-L

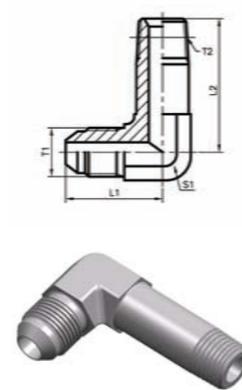90° 弯美制JIC外螺纹74° 外锥/加长布锥管外螺纹
90° ELBOW JIC MALE 74° CONE/LONG NPT MALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|------------------|---------------|-------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | | |
| S1JN9-04L | 7/16 " X20 | NPT1/4 " X18 | 24.5 | 40.1 | 14 | 43 | 27.5 |
| S1JN9-05-04L | 1/2 " X20 | NPT1/4 " X18 | 24.5 | 40.1 | 14 | 46 | 27.5 |
| S1JN9-06-04L | 9/16 " X18 | NPT1/4 " X18 | 26.9 | 40.1 | 14 | 51 | |
| S1JN9-06-08L | 9/16 " X18 | NPT1/2 " X14 | 31 | 55.1 | 22 | 114 | 21 |
| S1JN9-08-06L | 3/4 " X16 | NPT3/8 " X18 | 32 | 46.2 | 19 | 100 | 34.5 |
| S1JN9-08L | 3/4 " X16 | NPT1/2 " X14 | 33.3 | 55.1 | 22 | 139 | 21 |
| S1JN9-10-08L | 7/8 " X14 | NPT1/2 " X14 | 37 | 55.1 | 22 | 159 | |
| S1JN9-12-08L | 1.1/16 " X12 | NPT1/2 " X14 | 42.5 | 56.9 | 27 | 209 | 17 |
| S1JN9-12L | 1.1/16 " X12 | NPT3/4 " X14 | 42.5 | 62 | 27 | 264 | |
| S1JN9-16-12L | 1.5/16 " X12 | NPT3/4 " X14 | 46 | 69.9 | 33 | 345 | 14 |
| S1JN9-16L | 1.5/16 " X12 | NPT1 " X11.5 | 46 | 76.5 | 33 | 445 | |
| S1JN9-20L | 1.5/8 " X12 | NPT1.1/4 " X11.5 | 53 | 93.7 | 41 | 810 | 8 |
| S1JN9-24L | 1.7/8 " X12 | NPT1.1/2 " X11.5 | 60 | 104.1 | 48 | 1120 | 7 |


S1JN9-LL

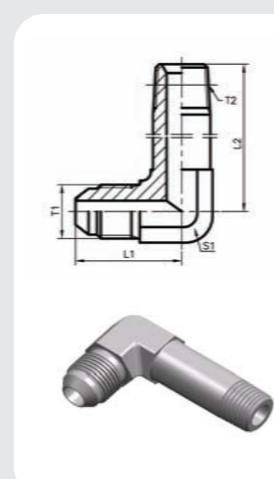90° 弯美制JIC外螺纹74° 外锥/特长布锥管外螺纹
90° ELBOW JIC MALE 74° CONE/LONGER NPT MALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|------------------|---------------|-------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | | |
| S1JN9-04LL | 7/16 " X20 | NPT1/4 " X18 | 24.5 | 52.6 | 14 | 51 | 27.5 |
| S1JN9-05-04LL | 1/2 " X20 | NPT1/4 " X18 | 24.5 | 52.6 | 14 | 55 | |
| S1JN9-06-04LL | 9/16 " X18 | NPT1/4 " X18 | 26.9 | 52.6 | 14 | 60 | 21 |
| S1JN9-06LL | 9/16 " X18 | NPT3/8 " X18 | 29 | 61.5 | 19 | 92 | |
| S1JN9-08-06LL | 3/4 " X16 | NPT3/8 " X18 | 32 | 61.5 | 19 | 117 | 21 |
| S1JN9-10-08LL | 7/8 " X14 | NPT1/2 " X14 | 37 | 72.9 | 22 | 187 | |
| S1JN9-12LL | 1.1/16 " X12 | NPT3/4 " X14 | 42.5 | 83.3 | 27 | 313 | 17 |
| S1JN9-16LL | 1.5/16 " X12 | NPT1 " X11.5 | 46 | 102.9 | 33 | 536 | |
| S1JN9-20LL | 1.5/8 " X12 | NPT1.1/4 " X11.5 | 53 | 127 | 41 | 991 | 8 |
| S1JN9-24LL | 1.7/8 " X12 | NPT1.1/2 " X11.5 | 60 | 141 | 48 | 1370 | 7 |

S1JO


美制JIC外螺纹74° 外锥/SAE外螺纹带O形圈轻系列 ISO 11926-3
JIC MALE 74° CONE/SAE O-RING BOSS L-SERIES ISO 11926-3

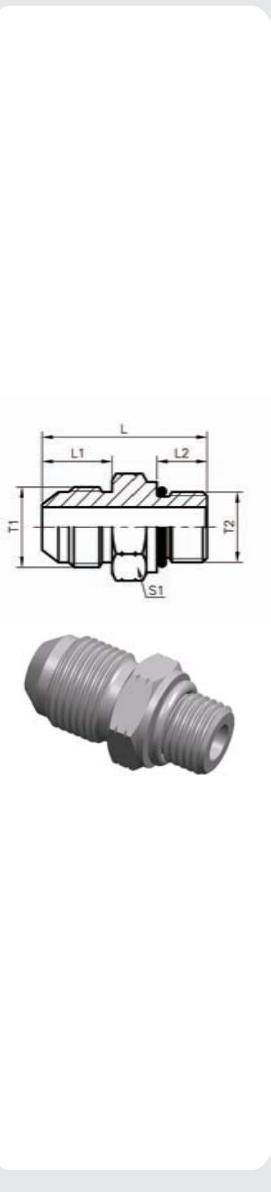

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|---------------|-------|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1JO-04 | 7/16 " X20 | 7/16 " X20 | 14 | 9.14 | 31.2 | 14 | 25 | 31.5 |
| S1JO-04-05 | 7/16 " X20 | 1/2 " X20 | 14 | 9.14 | 31.2 | 17 | 31 | |
| S1JO-04-06 | 7/16 " X20 | 9/16 " X18 | 14 | 9.93 | 32.7 | 17 | 33 | |
| S1JO-05 | 1/2 " X20 | 1/2 " X20 | 14 | 9.14 | 31.2 | 17 | 33 | |
| S1JO-05-04 | 1/2 " X20 | 7/16 " X20 | 14 | 9.14 | 31 | 14 | 26 | |
| S1JO-05-06 | 1/2 " X20 | 9/16 " X18 | 14 | 9.93 | 33 | 17 | 20 | |
| S1JO-06 | 9/16 " X18 | 9/16 " X18 | 14.1 | 9.93 | 33 | 17 | 22 | |
| S1JO-06-04 | 9/16 " X18 | 7/16 " X20 | 14.1 | 9.14 | 32.2 | 17 | 35 | |
| S1JO-06-05 | 9/16 " X18 | 1/2 " X20 | 14.1 | 9.14 | 32.2 | 17 | 36 | |
| S1JO-06-08 | 9/16 " X18 | 3/4 " X16 | 14.1 | 11.13 | 35.1 | 22 | 61 | |
| S1JO-08 | 3/4 " X16 | 3/4 " X16 | 16.7 | 11.13 | 37.6 | 22 | 75 | |
| S1JO-08-04 | 3/4 " X16 | 7/16 " X20 | 16.7 | 9.14 | 34 | 22 | 61 | |
| S1JO-08-06 | 3/4 " X16 | 9/16 " X18 | 16.7 | 9.93 | 36.5 | 22 | 67 | |
| S1JO-08-10 | 3/4 " X16 | 7/8 " X14 | 16.7 | 12.7 | 40.7 | 27 | 103 | |
| S1JO-08-12 | 3/4 " X16 | 1.1/16 " X12 | 16.7 | 15.1 | 44.7 | 32 | 153 | |
| S1JO-10 | 7/8 " X14 | 7/8 " X14 | 19.3 | 12.7 | 43.2 | 27 | 114 | 24 |
| S1JO-10-08 | 7/8 " X14 | 3/4 " X16 | 19.3 | 11 | 41.7 | 24 | 99 | |
| S1JO-10-12 | 7/8 " X14 | 1.1/16 " X12 | 19.3 | 15.1 | 47.2 | 32 | 162 | |
| S1JO-12 | 1.1/16 " X12 | 1.1/16 " X12 | 21.9 | 15.1 | 50 | 32 | 187 | 20 |
| S1JO-12-08 | 1.1/16 " X12 | 3/4 " X16 | 21.9 | 11.13 | 49.2 | 27 | 157 | |
| S1JO-12-10 | 1.1/16 " X12 | 7/8 " X14 | 21.9 | 12.7 | 47.7 | 27 | 147 | |
| S1JO-12-14 | 1.1/16 " X12 | 1.3/16 " X12 | 21.9 | 15.1 | 49 | 36 | 211 | |
| S1JO-12-16 | 1.1/16 " X12 | 1.5/16 " X12 | 21.9 | 15.1 | 50.5 | 38 | 237 | |
| S1JO-14 | 1.3/16 " X12 | 1.3/16 " X12 | 22.6 | 15.1 | 50.5 | 36 | 234 | |
| S1JO-14-12 | 1.3/16 " X12 | 1.1/16 " X12 | 22.6 | 15.1 | 49.5 | 32 | 198 | |
| S1JO-14-16 | 1.3/16 " X12 | 1.5/16 " X12 | 22.6 | 15.1 | 51.3 | 38 | 310 | |
| S1JO-16 | 1.5/16 " X12 | 1.5/16 " X12 | 23.1 | 15.1 | 51.8 | 38 | 267 | |
| S1JO-16-12 | 1.5/16 " X12 | 1.1/16 " X12 | 23.1 | 15.1 | 50.5 | 36 | 237 | |
| S1JO-16-14 | 1.5/16 " X12 | 1.3/16 " X12 | 23.1 | 15.1 | 52 | 36 | 254 | |
| S1JO-16-20 | 1.5/16 " X12 | 1.5/8 " X12 | 23.1 | 15.1 | 54.1 | 50 | 407 | |
| S1JO-20 | 1.5/8 " X12 | 1.5/8 " X12 | 24.3 | 15.1 | 55.1 | 50 | 451 | |
| S1JO-20-16 | 1.5/8 " X12 | 1.5/16 " X12 | 24.3 | 15.1 | 59.1 | 46 | 446 | |
| S1JO-20-24 | 1.5/8 " X12 | 1.7/8 " X12 | 24.3 | 15.1 | 54.5 | 55 | 494 | |
| S1JO-24 | 1.7/8 " X12 | 1.7/8 " X12 | 27.5 | 15.1 | 60.2 | 55 | 577 | 14 |
| S1JO-24-20 | 1.7/8 " X12 | 1.5/8 " X12 | 27.5 | 15.1 | 62 | 50 | 548 | |
| S1JO-24-32 | 1.7/8 " X12 | 2.1/2 " X12 | 27.5 | 15.1 | 62 | 70 | 857 | |
| S1JO-32 | 2.1/2 " X12 | 2.1/2 " X12 | 34 | 15 | 71 | 70 | 1141 | |

S1JO4-OG


45° 弯美制JIC外螺纹74° 外锥/SAE外螺纹带O形圈轻系列ISO 11926-3
45° ELBOW JIC MALE 74° CONE/SAE O-RING BOSS L-SERIES ISO 11926-3

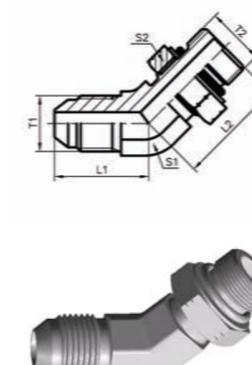

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | | |
| S1JO4-04OG | 7/16 " X20 | 7/16 " X20 | 20.6 | 24.7 | 11 | 14 | 30 | 31.5 |
| S1JO4-04-06OG | 7/16 " X20 | 9/16 " X18 | 21.1 | 29 | 14 | 17 | 42 | |
| S1JO4-04-08OG | 7/16 " X20 | 3/4 " X16 | 24.5 | 32.5 | 19 | 22 | 73 | |
| S1JO4-05OG | 1/2 " X20 | 1/2 " X20 | 19.6 | 26.7 | 14 | 17 | 38 | |
| S1JO4-05-04OG | 1/2 " X20 | 7/16 " X20 | 19.6 | 26.7 | 14 | 14 | 34 | |
| S1JO4-06OG | 9/16 " X18 | 9/16 " X18 | 21.1 | 29 | 14 | 17 | 48 | |
| S1JO4-06-04OG | 9/16 " X18 | 7/16 " X20 | 21.1 | 26.7 | 14 | 14 | 38 | |
| S1JO4-06-05OG | 9/16 " X18 | 1/2 " X20 | 21.1 | 26.7 | 14 | 17 | 42 | |
| S1JO4-06-08OG | 9/16 " X18 | 3/4 " X16 | 25 | 32.5 | 19 | 22 | 80 | |
| S1JO4-06-10OG | 9/16 " X18 | 7/8 " X14 | 25.5 | 38.5 | 22 | 27 | 108 | |
| S1JO4-08OG | 3/4 " X16 | 3/4 " X16 | 25 | 33 | 19 | 22 | 100 | |
| S1JO4-08-06OG | 3/4 " X16 | 9/16 " X18 | 25 | 28 | 19 | 17 | 70 | |
| S1JO4-08-10OG | 3/4 " X16 | 7/8 " X14 | 27.5 | 38.7 | 22 | 27 | 131 | |
| S1JO4-08-12OG | 3/4 " X16 | 1.1/16 " X12 | 30 | 43.9 | 27 | 32 | 188 | |
| S1JO4-10OG | 7/8 " X14 | 7/8 " X14 | 28.5 | 38.7 | 22 | 27 | 145 | |
| S1JO4-10-08OG | 7/8 " X14 | 3/4 " X16 | 28.5 | 34.5 | 22 | 22 | 121 | |
| S1JO4-10-12OG | 7/8 " X14 | 1.1/16 " X12 | 31 | 43.9 | 27 | 32 | 203 | |
| S1JO4-12OG | 1.1/16 " X12 | 1.1/16 " X12 | 32.5 | 43.9 | 27 | 32 | 237 | |
| S1JO4-12-10OG | 1.1/16 " X12 | 7/8 " X14 | 32.5 | 39.8 | 27 | 27 | 186 | |
| S1JO4-12-16OG | 1.1/16 " X12 | 1.5/16 " X12 | 37 | 45.5 | 33 | 41 | 315 | |
| S1JO4-14OG | 1.3/16 " X12 | 1.3/16 " X12 | 37 | 47.5 | 33 | 36 | 234 | |
| S1JO4-16OG | 1.5/16 " X12 | 1.5/16 " X12 | 37.5 | 47.5 | 33 | 41 | 372 | |
| S1JO4-16-12OG | 1.5/16 " X12 | 1.1/16 " X12 | 37.5 | 45 | 33 | 32 | 305 | |
| S1JO4-16-20OG | 1.5/16 " X12 | 1.5/8 " X12 | 40.5 | 47 | 41 | 50 | 475 | |
| S1JO4-20OG | 1.5/8 " X12 | 1.5/8 " X12 | 40.5 | 48.5 | 41 | 50 | 564 | |
| S1JO4-20-24OG | 1.5/8 " X12 | 1.7/8 " X12 | 45.5 | 50 | 48 | 55 | 671 | |
| S1JO4-24OG | 1.7/8 " X12 | 1.7/8 " X12 | 45.5 | 48.5 | 48 | 55 | 721 | |
| S1JO4-32OG | 2.1/2 " X12 | 2.1/2 " X12 | 56.5 | 54 | 63 | 70 | 1487 | 10.5 |

S1JO9-OG

90° 弯美制JIC外螺纹74° 外锥/SAE外螺纹带O形圈轻系列ISO 11926-3
90° ELBOW JIC MALE 74° CONE/SAE O-RING BOSS L-SERIES ISO 11926-3

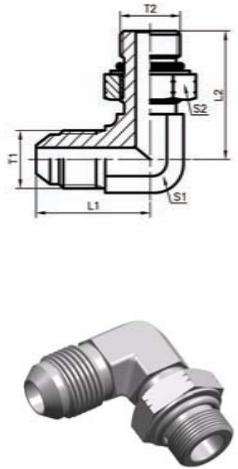


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | | |
| S1JO9-04OG | 7/16 " X20 | 7/16 " X20 | 22.6 | 26.2 | 11 | 14 | 33 | 31.5 |
| S1JO9-04-05OG | 7/16 " X20 | 1/2 " X20 | 24.1 | 28.7 | 14 | 17 | 40 | |
| S1JO9-04-06OG | 7/16 " X20 | 9/16 " X18 | 24.1 | 29.3 | 14 | 17 | 44 | |
| S1JO9-05-04OG | 1/2 " X20 | 7/16 " X20 | 24.1 | 28.7 | 14 | 14 | 39 | |
| S1JO9-05OG | 1/2 " X20 | 1/2 " X20 | 24.1 | 28.7 | 14 | 17 | 42 | |
| S1JO9-05-06OG | 1/2 " X20 | 9/16 " X18 | 24.1 | 31.8 | 14 | 17 | 50 | |
| S1JO9-06-04OG | 9/16 " X18 | 7/16 " X20 | 26.9 | 31.2 | 14 | 14 | 46 | |
| S1JO9-06-05OG | 9/16 " X18 | 1/2 " X20 | 26.9 | 31.2 | 14 | 17 | 50 | |
| S1JO9-06OG | 9/16 " X18 | 9/16 " X18 | 26.9 | 31.8 | 14 | 17 | 56 | |
| S1JO9-06-08OG | 9/16 " X18 | 3/4 " X16 | 29 | 36.8 | 19 | 22 | 92 | |
| S1JO9-08-04OG | 3/4 " X16 | 7/16 " X20 | 32 | 33 | 19 | 14 | 78 | |
| S1JO9-08-06OG | 3/4 " X16 | 9/16 " X18 | 32 | 33.5 | 19 | 17 | 87 | |
| S1JO9-08OG | 3/4 " X16 | 3/4 " X16 | 31.8 | 36.8 | 19 | 22 | 120 | |
| S1JO9-08-10OG | 3/4 " X16 | 7/8 " X14 | 34 | 43.5 | 22 | 27 | 153 | |
| S1JO9-08-12OG | 3/4 " X16 | 1.1/16 " X12 | 36.5 | 49.5 | 27 | 32 | 218 | |
| S1JO9-10-08OG | 7/8 " X14 | 3/4 " X16 | 38 | 40 | 22 | 22 | 152 | 24 |
| S1JO9-10OG | 7/8 " X14 | 7/8 " X14 | 36.8 | 43.2 | 22 | 27 | 173 | |
| S1JO9-10-12OG | 7/8 " X14 | 1.1/16 " X12 | 41 | 51 | 27 | 32 | 247 | |
| S1JO9-12-08OG | 1.1/16 " X12 | 3/4 " X16 | 42.2 | 44 | 27 | 22 | 208 | |
| S1JO9-12-10OG | 1.1/16 " X12 | 7/8 " X14 | 42.2 | 47 | 27 | 27 | 232 | |
| S1JO9-12OG | 1.1/16 " X12 | 1.1/16 " X12 | 42.2 | 49.3 | 27 | 32 | 284 | |
| S1JO9-12-16OG | 1.1/16 " X12 | 1.5/16 " X12 | 47.8 | 54.5 | 33 | 41 | 387 | |
| S1JO9-14OG | 1.3/16 " X12 | 1.3/16 " X12 | 45.7 | 51 | 30 | 36 | 370 | |
| S1JO9-14-16OG | 1.3/16 " X12 | 1.5/16 " X12 | 45.7 | 54.5 | 33 | 41 | 414 | |
| S1JO9-16-12OG | 1.5/16 " X12 | 1.1/16 " X12 | 45.7 | 54.5 | 33 | 32 | 370 | |
| S1JO9-16-14OG | 1.5/16 " X12 | 1.3/16 " X12 | 46 | 56 | 33 | 36 | 416 | |
| S1JO9-16OG | 1.5/16 " X12 | 1.5/16 " X12 | 46 | 52.1 | 33 | 41 | 430 | |
| S1JO9-16-20OG | 1.5/16 " X12 | 1.5/8 " X12 | 52.3 | 59 | 41 | 50 | 603 | |
| S1JO9-20-16OG | 1.5/8 " X12 | 1.5/16 " X12 | 52.3 | 57.2 | 41 | 41 | 582 | |
| S1JO9-20OG | 1.5/8 " X12 | 1.5/8 " X12 | 52.3 | 57.2 | 41 | 50 | 694 | |
| S1JO9-20-24OG | 1.5/8 " X12 | 1.7/8 " X12 | 56 | 60.7 | 48 | 55 | 834 | |
| S1JO9-24OG | 1.7/8 " X12 | 1.7/8 " X12 | 59.2 | 60.7 | 48 | 55 | 920 | |
| S1JO9-32OG | 2.1/2 " X12 | 2.1/2 " X12 | 77.7 | 73.4 | 63 | 70 | 2034 | 10.5 |

E

美制


S1JB-WD

美制JIC外螺纹74° 外锥/英管外螺纹胶垫密封
JIC MALE 74° CONE/BSP MALE CAPTIVE SEAL

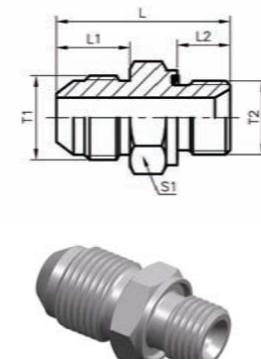


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|---------------|----|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1JB-04-02WD | 7/16 " X20 | G1/8 " X28 | 14 | 8 | 30 | 14 | 26 | 34.5 |
| S1JB-04WD | 7/16 " X20 | G1/4 " X19 | 14 | 12 | 34.8 | 19 | 38 | |
| S1JB-04-06WD | 7/16 " X20 | G3/8 " X19 | 14 | 12 | 35.7 | 22 | 52 | |
| S1JB-04-08WD | 7/16 " X20 | G1/2 " X14 | 14 | 14 | 39.2 | 27 | 105 | |
| S1JB-05-02WD | 1/2 " X20 | G1/8 " X28 | 14 | 8 | 30 | 14 | 25 | |
| S1JB-05-04WD | 1/2 " X20 | G1/4 " X19 | 14 | 12 | 34.8 | 19 | 25 | |
| S1JB-05-06WD | 1/2 " X20 | G3/8 " X19 | 14 | 12 | 35.7 | 22 | 57 | |
| S1JB-06-02WD | 9/16 " X18 | G1/8 " X28 | 14.1 | 8 | 31 | 17 | 32 | |
| S1JB-06-04WD | 9/16 " X18 | G1/4 " X19 | 14.1 | 12 | 35.1 | 19 | 44 | |
| S1JB-06WD | 9/16 " X18 | G3/8 " X19 | 14.1 | 12 | 36 | 22 | 58 | |
| S1JB-06-08WD | 9/16 " X18 | G1/2 " X14 | 14.1 | 14 | 39.4 | 27 | 101 | |
| S1JB-08-04WD | 3/4 " X16 | G1/4 " X19 | 16.7 | 12 | 39 | 19 | 61 | |
| S1JB-08-06WD | 3/4 " X16 | G3/8 " X19 | 16.7 | 12 | 39 | 22 | 59 | |
| S1JB-08WD | 3/4 " X16 | G1/2 " X14 | 16.7 | 14 | 42 | 27 | 115 | |
| S1JB-08-12WD | 3/4 " X16 | G3/4 " X14 | 16.7 | 16 | 45.6 | 32 | 177 | |
| S1JB-10-06WD | 7/8 " X14 | G3/8 " X19 | 19.3 | 12 | 42.6 | 24 | 98 | 24 |
| S1JB-10-08WD | 7/8 " X14 | G1/2 " X14 | 19.3 | 14 | 44.5 | 27 | 126 | |
| S1JB-10-12WD | 7/8 " X14 | G3/4 " X14 | 19.3 | 16 | 48.1 | 32 | 162 | |
| S1JB-12WD | 1.1/16 " X12 | G3/4 " X14 | 21.9 | 16 | 50.9 | 32 | 211 | |
| S1JB-12-06WD | 1.1/16 " X12 | G3/8 " X19 | 21.9 | 12 | 47 | 27 | 157 | |
| S1JB-12-08WD | 1.1/16 " X12 | G1/2 " X14 | 21.9 | 14 | 49 | 27 | 160 | |
| S1JB-12-16WD | 1.1/16 " X12 | G1 " X11 | 21.9 | 18 | 53.4 | 41 | 312 | |
| S1JB-16-12WD | 1.5/16 " X12 | G3/4 " X14 | 23.1 | 16 | 52.7 | 36 | 245 | |
| S1JB-16WD | 1.5/16 " X12 | G1 " X11 | 23.1 | 18 | 54.7 | 41 | 342 | |
| S1JB-16-20WD | 1.5/16 " X12 | G1.1/4 " X11 | 23.1 | 20 | 58.7 | 50 | 382 | |
| S1JB-20-16WD | 1.5/8 " X12 | G1 " X11 | 24.3 | 18 | 62.1 | 46 | 456 | 17 |
| S1JB-20WD | 1.5/8 " X12 | G1.1/4 " X11 | 24.3 | 20 | 60 | 50 | 488 | |
| S1JB-20-24WD | 1.5/8 " X12 | G1.1/2 " X11 | 24.3 | 22 | 63.8 | 55 | 590 | |
| S1JB-24-20WD | 1.7/8 " X12 | G1.1/4 " X11 | 27.5 | 20 | 62 | 50 | 544 | |
| S1JB-24WD | 1.7/8 " X12 | G1.1/2 " X11 | 27.5 | 22 | 67.1 | 55 | 633 | 10.5 |

美制

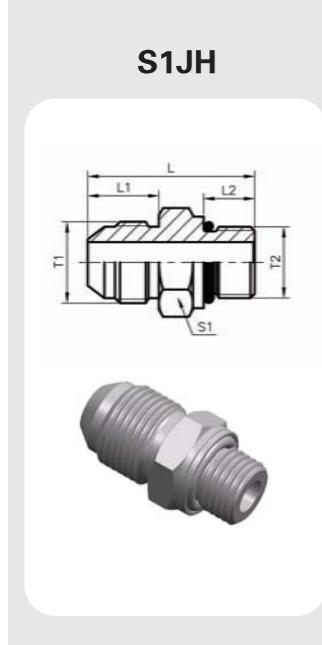

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|---------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1JH-04-10 | 7/16 " X20 | M10X1 | 14 | 8.5 | 30 | 14 | 21 | 34.5 |
| S1JH-05-12 | 1/2 " X20 | M12X1.5 | 14 | 11 | 31 | 17 | 30 | |
| S1JH-06-14 | 9/16 " X18 | M14X1.5 | 14.1 | 11 | 31 | 19 | 36 | |
| S1JH-06-16 | 9/16 " X18 | M16X1.5 | 14.1 | 11.5 | 35.1 | 22 | 52 | |
| S1JH-08-16 | 3/4 " X16 | M16X1.5 | 16.7 | 11.5 | 36 | 22 | 67 | |
| S1JH-08-18 | 3/4 " X16 | M18X1.5 | 16.7 | 12.5 | 39.1 | 24 | 74 | |
| S1JH-10-18 | 7/8 " X14 | M18X1.5 | 19.3 | 12.5 | 41.7 | 24 | 88 | |
| S1JH-10-22 | 7/8 " X14 | M22X1.5 | 19.3 | 13 | 43.5 | 27 | 108 | |
| S1JH-12-22 | 1.1/16 " X12 | M22X1.5 | 21.9 | 13 | 45.5 | 27 | 160 | |
| S1JH-12-27 | 1.1/16 " X12 | M27X2 | 21.9 | 16 | 49.5 | 32 | 180 | |
| S1JH-16-27 | 1.5/16 " X12 | M27X2 | 23.1 | 16 | 50.5 | 36 | 247 | 20 |
| S1JH-16-33 | 1.5/16 " X12 | M33X2 | 23.1 | 16 | 51.5 | 41 | 285 | |
| S1JH-20-42 | 1.5/8 " X12 | M42X2 | 24.3 | 16 | 55.5 | 50 | 488 | 17 |
| S1JH-24-48 | 1.7/8 " X12 | M48X2 | 27.5 | 17.5 | 61 | 55 | 605 | 14 |


注：需配挡圈请在代号后加“DQ”，如S1JH-24-48DQ。
Note: If you interested to order the adapter with retainer ring please insert suffix “DQ” after our part NO, for example S1JH-24-48DQ.

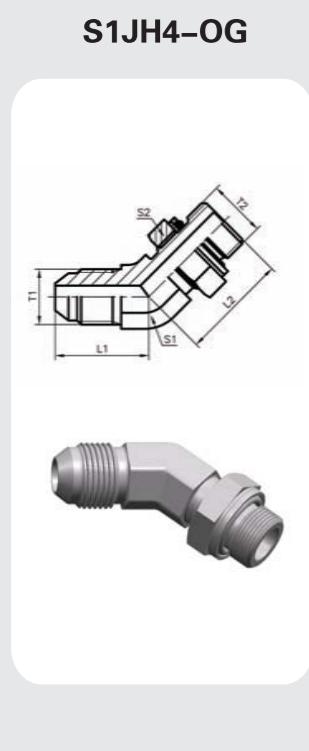

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|---------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | | |
| S1JH4-04-10OG | 7/16 " X20 | M10X1 | 21.5 | 23.5 | 11 | 14 | 26 | |
| S1JH4-04-12OG | 7/16 " X20 | M12X1.5 | 21.5 | 27.5 | 11 | 17 | 36 | |
| S1JH4-04-14OG | 7/16 " X20 | M14X1.5 | 22.3 | 28.3 | 14 | 19 | 40 | |
| S1JH4-05-12OG | 1/2 " X20 | M12X1.5 | 22.3 | 28.3 | 14 | 17 | 38 | |
| S1JH4-05-14OG | 1/2 " X20 | M14X1.5 | 22.3 | 28.3 | 14 | 19 | 44 | |
| S1JH4-06-14OG | 9/16 " X18 | M14X1.5 | 22.3 | 28.3 | 14 | 19 | 47 | |
| S1JH4-06-16OG | 9/16 " X18 | M16X1.5 | 22.3 | 29 | 16 | 22 | 58 | |
| S1JH4-08-16OG | 3/4 " X16 | M16X1.5 | 26.8 | 30 | 19 | 22 | 79 | 25 |
| S1JH4-08-18OG | 3/4 " X16 | M18X1.5 | 26.8 | 31 | 19 | 24 | 93 | |
| S1JH4-10-16OG | 7/8 " X14 | M16X1.5 | 31 | 31 | 22 | 22 | 106 | |
| S1JH4-10-18OG | 7/8 " X14 | M18X1.5 | 31 | 32 | 22 | 24 | 115 | |
| S1JH4-10-22OG | 7/8 " X14 | M22X1.5 | 31 | 33 | 22 | 27 | 136 | |
| S1JH4-12-22OG | 1.1/16 " X12 | M22X1.5 | 35.5 | 34.5 | 27 | 27 | 182 | |
| S1JH4-12-27OG | 1.1/16 " X12 | M27X2 | 32.5 | 39.5 | 27 | 32 | 223 | |
| S1JH4-16-27OG | 1.5/16 " X12 | M27X2 | 38.5 | 41 | 33 | 32 | 296 | 16 |
| S1JH4-16-33OG | 1.5/16 " X12 | M33X2 | 38.5 | 41.5 | 33 | 41 | 345 | |
| S1JH4-20-42OG | 1.5/8 " X12 | M42X2 | 43 | 45 | 41 | 50 | 575 | |
| S1JH4-24-48OG | 1.7/8 " X12 | M48X2 | 49 | 49.5 | 48 | 55 | 766 | 14 |

注：需配挡圈请在代号后加“DQ”，如S1JH4-16-27OGDQ。
Note: If you interested to order the adapter with retainer ring please insert suffix “DQ” after our part NO, for example S1JH4-16-27OGDQ.


S1JH9-OG

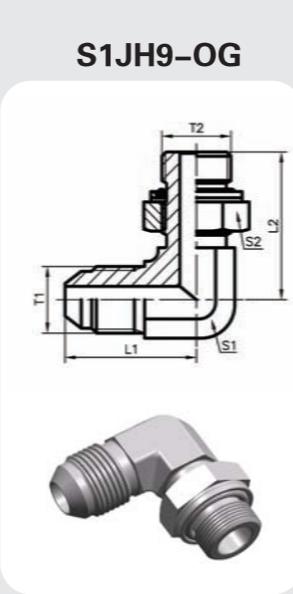

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|---------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | | |
| S1JH9-04-10OG | 7/16 " X20 | M10X1 | 22.6 | 25 | 11 | 14 | 28 | 31.5 |
| S1JH9-05-12OG | 1/2 " X20 | M12X1.5 | 24.1 | 30 | 14 | 17 | 41 | |
| S1JH9-06-14OG | 9/16 " X18 | M14X1.5 | 26.9 | 34.9 | 14 | 19 | 58 | |
| S1JH9-08-16OG | 3/4 " X16 | M16X1.5 | 31.8 | 35.9 | 19 | 22 | 95 | 25 |
| S1JH9-08-18OG | 3/4 " X16 | M18X1.5 | 31.8 | 36.8 | 19 | 24 | 110 | |
| S1JH9-10-18OG | 7/8 " X14 | M18X1.5 | 36.8 | 40.7 | 22 | 24 | 125 | |
| S1JH9-10-22OG | 7/8 " X14 | M22X1.5 | 36.8 | 41.7 | 22 | 27 | 167 | 24 |
| S1JH9-12-22OG | 1.1/16 " X12 | M22X1.5 | 42.2 | 44.4 | 27 | 27 | 224 | |
| S1JH9-12-27OG | 1.1/16 " X12 | M27X2 | 42.2 | 48.5 | 27 | 32 | 282 | |
| S1JH9-16-33OG | 1.5/16 " X12 | M33X2 | 46 | 51.2 | 33 | 41 | 420 | 16 |

注：需配挡圈请在代号后加“DQ”，如S1JH9-16-27OGDQ。
Note: If you interested to order the adapter with retainer ring please insert suffix “DQ” after our part NO, for example S1JH9-16-27OGDQ.


S1JG

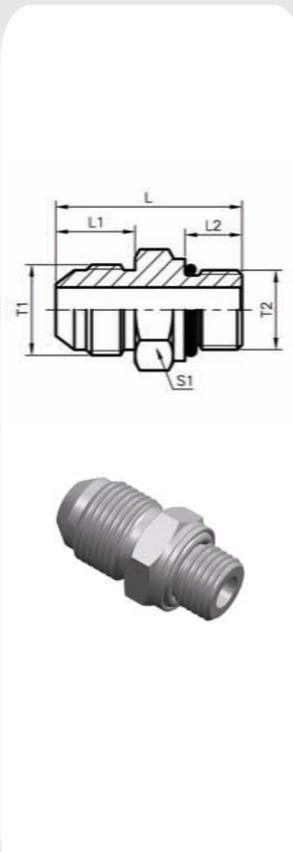

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|------------|------------|---------------|----|------|------|---------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1JG-04-02 | 7/16 " X20 | G1/8 " X28 | 14 | 8 | 28.7 | 14 | 23 | 34.5 |
| S1JG-04 | 7/16 " X20 | G1/4 " X19 | 14 | 12 | 32 | 19 | 30 | |
| S1JG-04-06 | 7/16 " X20 | G3/8 " X19 | 14 | 12 | 33 | 22 | 42 | |
| S1JG-04-08 | 7/16 " X20 | G1/2 " X14 | 14 | 14 | 38.6 | 27 | 92 | 31.5 |
| S1JG-05-04 | 1/2 " X20 | G1/4 " X19 | 14 | 12 | 32 | 19 | 32 | 34.5 |
| S1JG-05-06 | 1/2 " X20 | G3/8 " X19 | 14 | 12 | 33 | 22 | 45 | 31.5 |
| S1JG-06-04 | 9/16 " X18 | G1/4 " X19 | 14.1 | 12 | 32 | 19 | 31 | 34.5 |
| S1JG-06 | 9/16 " X18 | G3/8 " X19 | 14.1 | 12 | 33 | 22 | 45 | |
| S1JG-06-08 | 9/16 " X18 | G1/2 " X14 | 14.1 | 14 | 38.6 | 27 | 94 | |
| S1JG-08-04 | 3/4 " X16 | G1/4 " X19 | 16.7 | 12 | 35 | 19 | 48 | |
| S1JG-08-06 | 3/4 " X16 | G3/8 " X19 | 16.7 | 12 | 36 | 22 | 60 | 31 |
| S1JG-08 | 3/4 " X16 | G1/2 " X14 | 16.7 | 14 | 41.4 | 27 | 108 | |
| S1JG-08-12 | 3/4 " X16 | G3/4 " X14 | 16.7 | 16 | 42.4 | 36</ | | |

S1JG4-OG

45° 弯美制JIC外螺纹74° 外锥/英管外螺纹O形圈可调柱端
45° ELBOW JIC MALE 74° CONE/BSP MALE O-RING ADJUSTABLE STUD END

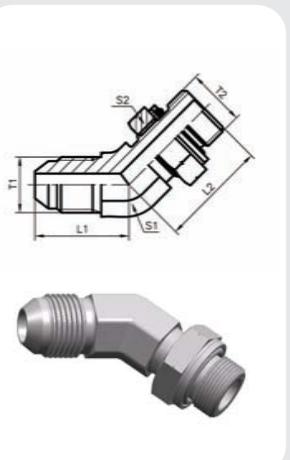


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | | |
| S1JG4-04OG | 7/16 " X20 | G1/4 " X19 | 21 | 28 | 14 | 19 | 39 | 31.5 |
| S1JG4-05-04OG | 1/2 " X20 | G1/4 " X19 | 21 | 28 | 14 | 19 | 42 | |
| S1JG4-06-04OG | 9/16 " X18 | G1/4 " X19 | 22 | 28 | 14 | 19 | 43 | |
| S1JG4-06OG | 9/16 " X18 | G3/8 " X19 | 23 | 32 | 19 | 22 | 68 | |
| S1JG4-08-06OG | 3/4 " X16 | G3/8 " X19 | 25.8 | 32 | 19 | 22 | 90 | 25 |
| S1JG4-08OG | 3/4 " X16 | G1/2 " X14 | 27.8 | 36 | 22 | 27 | 128 | |
| S1JG4-10-08OG | 7/8 " X14 | G1/2 " X14 | 29.5 | 38 | 22 | 27 | 148 | 24 |
| S1JG4-10OG | 7/8 " X14 | G5/8 " X14 | 29.5 | 38 | 22 | 30 | 153 | - |
| S1JG4-12-10OG | 1.1/16 " X12 | G5/8 " X14 | 34 | 38.5 | 27 | 30 | 196 | - |
| S1JG4-12-16OG | 1.1/16 " X12 | G1 " X11 | 37.5 | 44 | 33 | 41 | 308 | 20 |
| S1JG4-12OG | 1.1/16 " X12 | G3/4 " X14 | 32.5 | 42 | 27 | 32 | 224 | |
| S1JG4-16-12OG | 1.5/16 " X12 | G3/4 " X14 | 38 | 44 | 33 | 32 | 296 | |
| S1JG4-16OG | 1.5/16 " X12 | G1 " X11 | 38 | 44 | 33 | 41 | 358 | |
| S1JG4-20OG | 1.5/8 " X12 | G1.1/4 " X11 | 43 | 47.5 | 41 | 50 | 589 | |
| S1JG4-24OG | 1.7/8 " X12 | G1.1/2 " X11 | 49 | 51.5 | 48 | 55 | 776 | 14 |

注：需配挡圈请在代号后加“DQ”，如 S1JG4-16OGDQ
Note: If you interested to order the adapter with retainer ring please insert suffix “DQ” after our part NO, for example S1JG4-16OGDQ

S1JG9-OG

90° 弯美制JIC外螺纹74° 外锥/英管外螺纹O形圈密封可调柱端
90° ELBOW JIC MALE 74° CONE/BSP MALE O-RING ADJUSTABLE STUD END

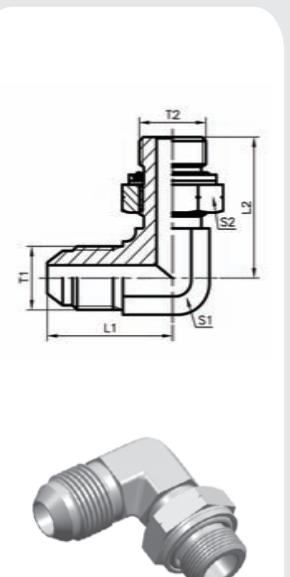


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | | |
| S1JG9-04-02OG | 7/16 " X20 | G1/8 " X28 | 22.6 | 26.2 | 11 | 14 | 28 | |
| S1JG9-04OG | 7/16 " X20 | G1/4 " X19 | 22.6 | 31.8 | 14 | 19 | 46 | 31.5 |
| S1JG9-05-02OG | 1/2 " X20 | G1/8 " X28 | 24.1 | 27.7 | 14 | 14 | 33 | |
| S1JG9-05-06OG | 1/2 " X20 | G3/8 " X19 | 26.6 | 31.8 | 14 | 19 | 50 | |
| S1JG9-05-08OG | 1/2 " X20 | G1/2 " X19 | 28.5 | 36.8 | 19 | 22 | 75 | 25 |
| S1JG9-06-04OG | 9/16 " X18 | G1/4 " X19 | 26.9 | 31.8 | 14 | 19 | 50 | 31.5 |
| S1JG9-06-08OG | 9/16 " X18 | G3/8 " X19 | 29 | 36.8 | 19 | 22 | 80 | 25 |
| S1JG9-08-04OG | 3/4 " X16 | G1/4 " X19 | 31.8 | 36.8 | 19 | 27 | 88 | 31.5 |
| S1JG9-08OG | 3/4 " X16 | G3/8 " X19 | 31.8 | 36.8 | 19 | 22 | 100 | |
| S1JG9-08-06OG | 3/4 " X16 | G1/2 " X14 | 33.8 | 43.2 | 22 | 27 | 155 | |
| S1JG9-10-06OG | 7/8 " X14 | G3/8 " X19 | 36.8 | 37.1 | 22 | 36 | 125 | 25 |
| S1JG9-10-08OG | 7/8 " X14 | G1/2 " X14 | 36.8 | 43.2 | 22 | 27 | 158 | |
| S1JG9-10-12OG | 7/8 " X14 | G3/4 " X14 | 39.2 | 49.3 | 27 | 36 | 229 | 16 |
| S1JG9-12OG | 1.1/16 " X12 | G3/4 " X14 | 42.2 | 49.3 | 27 | 27 | 196 | 25 |
| S1JG9-12-08OG | 1.1/16 " X12 | G1/2 " X14 | 42.2 | 49.3 | 27 | 36 | 275 | 16 |
| S1JG9-12-16OG | 1.1/16 " X12 | G1 " X11 | 44.7 | 52.1 | 33 | 41 | 365 | |
| S1JG9-16OG | 1.5/16 " X12 | G1 " X14 | 46 | 48.2 | 33 | 36 | 342 | |
| S1JG9-16-12OG | 1.5/16 " X12 | G3/4 " X11 | 46 | 52.1 | 33 | 41 | 428 | 16 |
| S1JG9-20OG | 1.5/8 " X12 | G1.1/4 " X11 | 52.3 | 57.2 | 41 | 41 | 580 | |
| S1JG9-20-16OG | 1.5/8 " X12 | G14 " X11 | 52.3 | 57.2 | 41 | 50 | 712 | 14 |
| S1JG9-24-16OG | 1.7/8 " X12 | G1 " X11 | 59.2 | 60.7 | 48 | 50 | 962 | |
| S1JG9-24-20OG | 1.7/8 " X12 | G1.1/4 " X11 | 59.2 | 60.7 | 48 | 50 | 926 | 10 |

注：需配挡圈请在代号后加“DQ”，如 S1JG9-20OGDQ
Note: If you interested to order the adapter with retainer ring please insert suffix “DQ” after our part NO, for example S1JG9-20OGDQ

S1JM-WD


JIC外螺纹74° 外锥/公制螺纹胶垫密封
JIC MALE 74° CONE/METRIC THREAD MALE CAPTIVE SEAL

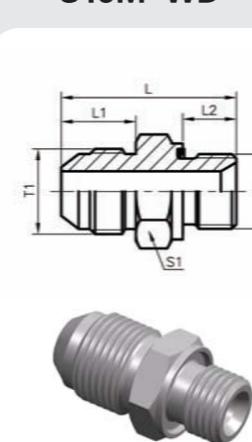


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|---------|---------------|----|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1JM-04-10WD | 7/16 " X20 | M10X1 | 14 | 8 | 31 | 14 | 22 | |
| S1JM-05-12WD | 1/2 " X20 | M12X1.5 | 14 | 12 | 33.5 | 17 | 30 | |
| S1JM-06-14WD | 9/16 " X18 | M14X1.5 | 14.1 | 12 | 33.5 | 19 | 36 | |
| S1JM-06-16WD | 9/16 " X18 | M16X1.5 | 14.1 | 12 | 35.1 | 22 | 50 | |
| S1JM-08-16WD | 3/4 " X16 | M16X1.5 | 16.7 | 12 | 37.6 | 22 | 60 | 31 |
| S1JM-08-18WD | 3/4 " X16 | M18X1.5 | 16.7 | 12 | 39.1 | 24 | 70 | |
| S1JM-10-18WD | 7/8 " X14 | M18X1.5 | 19.3 | 12 | 41.7 | 24 | 85 | |
| S1JM-10-22WD | 7/8 " X14 | M22X1.5 | 19.3 | 14 | 42.9 | 27 | 100 | 24 |
| S1JM-12-22WD | 1.1/16 " X12 | M22X1.5 | 21.9 | 14 | 45.5 | 27 | 108 | |
| S1JM-12-27WD | 1.1/16 " X12 | M27X2 | 21.9 | 16 | 49 | 32 | 162 | |
| S1JM-16-33WD | 1.5/16 " X12 | M33X2 | 23.1 | 18 | 51.6 | 41 | 245 | 21 |
| S1JM-20-42WD | 1.5/8 " X12 | M42X2 | 24.3 | 20 | 54.9 | 50 | 381 | 17 |

S1JT-SP


美制JIC外螺纹74° 外锥/英锥管外螺纹60° 内锥
JIC MALE 74° CONE/BSPT MALE 60° SEAT

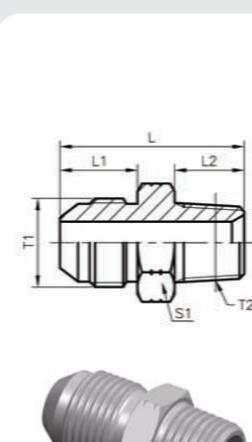

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|------------|------------|---------------|----|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1JT-04-02SP | 7/16 " X20 | R1/8 " X28 | 14 | 10 | 31 | 12 | 22 | |
| S1JT-04SP | 7/16 " X20 | R1/4 " X19 | 14 | 12 | 36</ | | | |

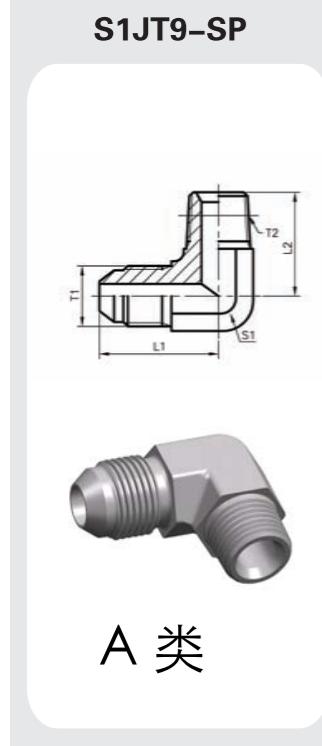90° 弯美制JIC外螺纹74° 外锥/英锥管外螺纹
90° ELBOW JIC MALE 74° CONE/BSPT MALE


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|---------------|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | | |
| S1JT9-04-02SP | 7/16 " X24 | R1/8 " X28 | 22.6 | 19.8 | 11 | 22 | 34.5 |
| S1JT9-04SP | 7/16 " X24 | R1/4 " X19 | 26.6 | 27.7 | 14 | 40 | |
| S1JT9-05-02SP | 1/2 " X20 | R1/8 " X28 | 24.1 | 19.8 | 14 | 22 | |
| S1JT9-05-04SP | 1/2 " X20 | R1/4 " X19 | 26.6 | 27.7 | 14 | 41 | |
| S1JT9-06-04SP | 9/16 " X18 | R1/4 " X19 | 26.9 | 27.7 | 14 | 42 | |
| S1JT9-06SP | 9/16 " X18 | R3/8 " X19 | 29 | 31 | 16 | 65 | |
| S1JT9-06-08SP | 9/16 " X18 | R1/2 " X14 | 31 | 37.3 | 22 | 100 | |
| S1JT9-08-04SP | 3/4 " X16 | R1/4 " X19 | 31.8 | 31 | 19 | 71 | |
| S1JT9-08-06SP | 3/4 " X16 | R3/8 " X19 | 31.8 | 31 | 19 | 83 | |
| S1JT9-08SP | 3/4 " X16 | R1/2 " X14 | 33.8 | 37.3 | 22 | 127 | |
| S1JT9-10-06SP | 7/8 " X14 | R3/8 " X19 | 36.5 | 32.5 | 22 | 112 | 24 |
| S1JT9-10-08SP | 7/8 " X14 | R1/2 " X14 | 36.8 | 37.3 | 22 | 132 | |
| S1JT9-10-12SP | 7/8 " X14 | R3/4 " X14 | 39.2 | 40.4 | 27 | 182 | |
| S1JT9-12-08SP | 1.1/16 " X12 | R1/2 " X14 | 42.2 | 40.4 | 27 | 198 | |
| S1JT9-12SP | 1.1/16 " X12 | R3/4 " X14 | 42.2 | 40.4 | 27 | 224 | |
| S1JT9-16-12SP | 1.5/16 " X12 | R3/4 " X14 | 46 | 45.2 | 33 | 300 | |
| S1JT9-16SP | 1.5/16 " X12 | R1 " X11 | 46 | 50 | 33 | 377 | |
| S1JT9-20-16SP | 1.5/8 " X12 | R1 " X11 | 52.3 | 59.7 | 41 | 531 | |
| S1JT9-20SP | 1.5/8 " X12 | R1.1/4 " X11 | 52.3 | 60.5 | 41 | 660 | |
| S1JT9-24SP | 1.7/8 " X12 | R1.1/2 " X11 | 59.2 | 67.1 | 48 | 878 | 10.5 |

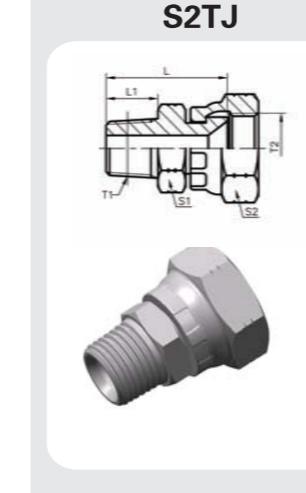英锥管外螺纹/JIC内螺纹74° 内锥
BSPT MALE/JIC FEMALE 74° SEAT

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|--------------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L | S1 | S2 | | |
| S2TJ-04 | R1/4 " X19 | 7/16 " X20 | 12 | 29.1 | 14 | 14 | 98 | 34.5 |
| S2TJ-04-05 | R1/4 " X19 | 1/2 " X20 | 12 | 28.9 | 14 | 17 | 90 | |
| S2TJ-04-06 | R1/4 " X19 | 9/16 " X18 | 12 | 29.8 | 14 | 19 | 113 | |
| S2TJ-06 | R3/8 " X19 | 9/16 " X18 | 12 | 30.1 | 19 | 19 | 155 | |
| S2TJ-04-08 | R1/4 " X19 | 3/4 " X16 | 12 | 31.8 | 19 | 24 | 158 | |
| S2TJ-06-08 | R3/8 " X19 | 3/4 " X16 | 12 | 31.8 | 19 | 24 | 189 | |
| S2TJ-08-10 | R1/2 " X14 | 7/8 " X14 | 14 | 38.2 | 22 | 27 | 283 | 24 |
| S2TJ-08-12 | R1/2 " X14 | 1.1/16 " X12 | 14 | 39.6 | 27 | 32 | 353 | |
| S2TJ-12 | R3/4 " X14 | 1.1/16 " X12 | 16 | 39.6 | 27 | 32 | 454 | |
| S2TJ-12-16 | R3/4 " X14 | 1.5/16 " X12 | 16 | 42.9 | 32 | 41 | 547 | |
| S2TJ-16 | R1 " X11 | 1.5/16 " X12 | 18 | 47.8 | 36 | 41 | 693 | |
| S2TJ-20 | R1.1/4 " X11 | 1.5/8 " X12 | 20 | 52 | 46 | 50 | 1130 | 17 |

公制螺纹胶垫密封/JIC内螺纹74° 内锥
METRIC THREAD MALE CAPTIVE SEAL/JIC FEMALE 74° SEAT


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|-----------|--------------|---------------|------|----|---------|-------------|
| | T1 | T2 | L1 | L | S1 | | |
| S2MJ-10-04WD | M10X1 | 7/16 " X20 | 8 | 24 | 14 | 14 | 65 |
| S2MJ-12-05WD | M12X1.5 | 1/2 " X20 | 12 | 28.8 | 17 | 17 | 80 |
| S2MJ-14-06WD | M14X1.5 | 9/16 " X18 | 12 | 30.4 | 19 | 19 | 134 |
| S2MJ-16-08WD | M16X1.5 | 3/4 " X16 | 12 | 33.5 | 22 | 24 | 187 |
| S2MJ-22-10WD | M22X1.5 | 7/8 " X14 | 14 | 37.6 | 27 | 27 | 340 |
| S2MJ-27-12WD | M27X2 | 1.1/16 " X12 | 16 | 41.5 | 32 | 32 | 535 |
| S2MJ-33-16WD | M33X2 | 1.5/16 " X12 | 18 | 45.2 | 41 | 41 | 815 |

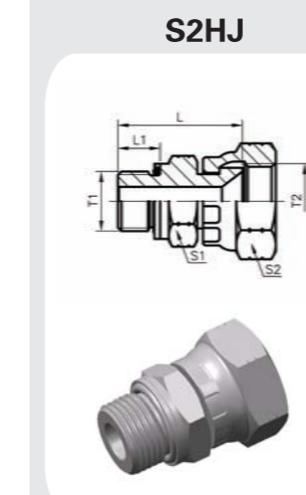公制外螺纹轻系列ISO 6149-3/JIC内螺纹74° 内锥
METRIC MALE END L-SERIES ISO 6149-3/JIC FEMALE 74° SEAT

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|-----------|--------------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L | S1 | S2 | | |
| S2HJ-10-04 | M10X1 | 7/16 " X20 | 8.5 | 16.4 | 14 | 14 | 62 | 34.5 |
| S2HJ-12-05 | M12X1.5 | 1/2 " X20 | 11 | 20.8 | 17 | 17 | 80 | |
| S2HJ-14-06 | M14X1.5 | 9/16 " X18 | 11 | 21.4 | 19 | 19 | 125 | |
| S2HJ-16-08 | M16X1.5 | 3/4 " X16 | 11.5 | 22.8 | 22 | 24 | 190 | |
| S2HJ-22-10 | M22X1.5 | 7/8 " X14 | 13 | 22.8 | 27 | 27 | 340 | |
| S2HJ-27-12 | M27X2 | 1.1/16 " X12 | 16 | 23.4 | 32 | 32 | 578 | |
| S2HJ-33-16 | M33X2 | 1.5/16 " X12 | 16 | 57.5 | 41 | 41 | 633 | 20 |


注：需配挡圈请在代号后加“DQ”，如 S2HJ-22-10DQ
Note: If you interested to order the adapter with retainer ring please insert suffix "DQ" after our part NO, for example S2HJ-22-10DQ

S2OJ

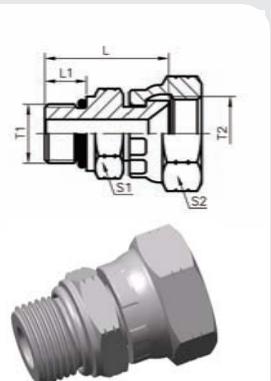SAE 外螺纹带O形圈轻系列/JIC内螺纹74° 内锥
SAE O-RING BOSS L-SERIES/JICFEMALE 74° SEAT

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|-------------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L | S1 | S2 | | |
| S2OJ-04 | 7/16" X20 | 7/16" X20 | 9.14 | 24.5 | 14 | 14 | 80 | 31.5 |
| S2OJ-06-04 | 9/16" X18 | 7/16" X20 | 9.93 | 26 | 17 | 14 | 11 | |
| S2OJ-05 | 1/2" X20 | 1/2" X20 | 9.14 | 25 | 17 | 17 | 82 | |
| S2OJ-06 | 9/16" X18 | 9/16" X18 | 9.93 | 26 | 17 | 19 | 113 | |
| S2OJ-04-06 | 7/16" X20 | 9/16" X18 | 9.14 | 24.5 | 14 | 19 | 90 | |
| S2OJ-08-06 | 3/4" X16 | 9/16" X18 | 11.13 | 27.5 | 22 | 19 | 185 | |
| S2OJ-08 | 3/4" X16 | 3/4" X16 | 11.13 | 30 | 22 | 24 | 230 | |
| S2OJ-06-08 | 9/16" X18 | 3/4" X16 | 9.93 | 28 | 19 | 24 | 162 | |
| S2OJ-10-08 | 7/8" X14 | 3/4" X16 | 12.7 | 37 | 27 | 24 | 319 | |
| S2OJ-10 | 7/8" X14 | 7/8" X14 | 12.7 | 34 | 27 | 27 | 325 | |
| S2OJ-08-10 | 3/4" X16 | 7/8" X14 | 11.13 | 29.5 | 22 | 27 | 248 | 25 |
| S2OJ-12-10 | 1.1/16" X12 | 7/8" X14 | 15.1 | 36 | 32 | 27 | 505 | 24 |
| S2OJ-12 | 1.1/16" X12 | 1.1/16" X12 | 15.1 | 37.5 | 32 | 32 | 473 | |
| S2OJ-10-12 | 7/8" X14 | 1.1/16" X12 | 12.7 | 38.5 | 27 | 32 | 374 | |
| S2OJ-16-12 | 1.5/16" X12 | 1.1/16" X12 | 15.1 | 42 | 41 | 32 | 751 | |
| S2OJ-16 | 1.5/16" X12 | 1.5/16" X12 | 15.1 | 42 | 41 | 41 | 737 | 20 |
| S2OJ-12-16 | 1.1/16" X12 | 1.5/16" X12 | 15.1 | 38.5 | 36 | 41 | 581 | |
| S2OJ-20 | 1.5/8" X12 | 1.5/8" X12 | 15.1 | 46.5 | 50 | 50 | 969 | |
| | | | | | | | 16 | |


SAJ6JJ-LN

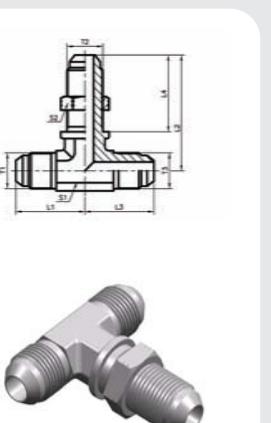美制JIC外螺纹74° 外锥过板接头分支三通
JIC MALE 74° CONE BULKHEAD BRANCH TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|-------------|-------------|---------------|------|------|------|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S2 | | |
| SAJ6JJ-04LN | 7/16" X20 | 7/16" X20 | 7/16" X20 | 24.6 | 40.4 | 24.6 | 26 | 11 | 17 |
| SAJ6JJ-05LN | 1/2" X20 | 1/2" X20 | 1/2" X20 | 26.9 | 43.7 | 26.9 | 26 | 19 | 82 |
| SAJ6JJ-06LN | 9/16" X18 | 9/16" X18 | 9/16" X18 | 27.7 | 46 | 27.7 | 14 | 22 | 101 |
| SAJ6JJ-08LN | 3/4" X16 | 3/4" X16 | 3/4" X16 | 34.5 | 53.6 | 34.5 | 19 | 24 | 205 |
| SAJ6JJ-10LN | 7/8" X14 | 7/8" X14 | 7/8" X14 | 39.6 | 60.7 | 39.6 | 22 | 30 | 300 |
| SAJ6JJ-12LN | 1.1/16" X12 | 1.1/16" X12 | 1.1/16" X12 | 45.2 | 67.8 | 45.2 | 27 | 36 | 487 |
| SAJ6JJ-16LN | 1.5/16" X12 | 1.5/16" X12 | 1.5/16" X12 | 49.3 | 74.3 | 49.3 | 71.1 | 39.5 | 21 |
| SAJ6JJ-20LN | 1.5/8" X12 | 1.5/8" X12 | 1.5/8" X12 | 55.1 | 85.1 | 55.1 | 79.2 | 41 | 50 |
| SAJ6JJ-24LN | 1.7/8" X12 | 1.7/8" X12 | 1.7/8" X12 | 59.4 | 96.9 | 59.4 | 96.9 | 48 | 55 |


美制

SAJJ6J-LN

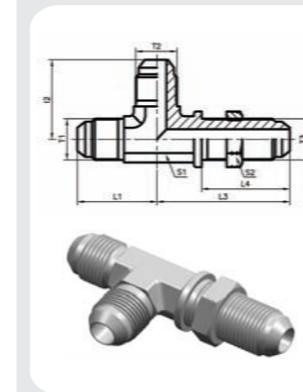美制JIC外螺纹74° 外锥过板接头主支三通
JIC MALE 74° CONE BULKHEAD RUN TEE


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|-------------|-------------|---------------|------|------|------|------|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | S2 | | |
| SAJJ6J-04LN | 7/16" X20 | 7/16" X20 | 7/16" X20 | 24.6 | 24.6 | 40.4 | 26 | 11 | 17 | 62 |
| SAJJ6J-05LN | 1/2" X20 | 1/2" X20 | 1/2" X20 | 26.9 | 26.9 | 43.7 | 26 | 19 | 82 | 34.5 |
| SAJJ6J-06LN | 9/16" X18 | 9/16" X18 | 9/16" X18 | 27.7 | 27.7 | 46 | 14 | 22 | 22 | 101 |
| SAJJ6J-08LN | 3/4" X16 | 3/4" X16 | 3/4" X16 | 34.5 | 34.5 | 53.6 | 19 | 24 | 205 | 31 |
| SAJJ6J-10LN | 7/8" X14 | 7/8" X14 | 7/8" X14 | 39.6 | 39.6 | 60.7 | 22 | 30 | 300 | 24 |
| SAJJ6J-12LN | 1.1/16" X12 | 1.1/16" X12 | 1.1/16" X12 | 45.2 | 45.2 | 67.8 | 27 | 36 | 487 | 21 |
| SAJJ6J-16LN | 1.5/16" X12 | 1.5/16" X12 | 1.5/16" X12 | 49.3 | 49.3 | 74.3 | 71.1 | 39.5 | 21 | 569 |
| SAJJ6J-20LN | 1.5/8" X12 | 1.5/8" X12 | 1.5/8" X12 | 55.1 | 55.1 | 85.1 | 79.2 | 41 | 50 | 923 |
| SAJJ6J-24LN | 1.7/8" X12 | 1.7/8" X12 | 1.7/8" X12 | 59.4 | 59.4 | 96.9 | 96.9 | 48 | 55 | 1236 |

SAJJO-OG

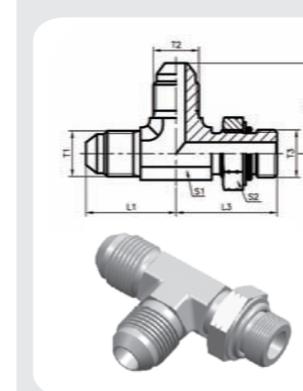美制JIC外螺纹74° 外锥/SAE外螺纹带O形圈轻系列ISO11926-3主支三通
JIC MALE 74° CONE/SAE O-RING BOSS L-SERIES ISO 11926-3 RUN TEE


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|-------------|-------------|---------------|------|------|----|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | S2 | | |
| SAJJO-04OG | 7/16" X20 | 7/16" X20 | 7/16" X20 | 22.6 | 22.6 | 26.2 | 11 | 14 | 43 | 31.5 |
| SAJJO-05OG | 1/2" X20 | 1/2" X20 | 1/2" X20 | 24.1 | 24.1 | 28.7 | 14 | 17 | 56 | |
| SAJJO-06OG | 9/16" X18 | 9/16" X18 | 9/16" X18 | 26.9 | 26.9 | 31.8 | 14 | 17 | 74 | |
| SAJJO-08OG | 3/4" X16 | 3/4" X16 | 3/4" X16 | 31.8 | 31.8 | 36.8 | 19 | 22 | 157 | |
| SAJJO-10OG | 7/8" X14 | 7/8" X14 | 7/8" X14 | 36.8 | 36.8 | 43.2 | 22 | 27 | 226 | |
| SAJJO-12OG | 1.1/16" X12 | 1.1/16" X12 | 1.1/16" X12 | 42.2 | 42.2 | 49.3 | 27 | 32 | 373 | |
| SAJJO-16OG | 1.5/16" X12 | 1.5/16" X12 | 1.5/16" X12 | 46</td | | | | | | |

S1F

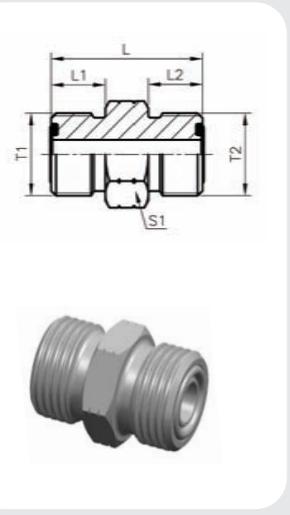美制ORFS外螺纹O形圈平面密封
ORFS MALE O-RING


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | 重量 g | 工作压力 Mpa |
|----------------|---------------|---------------|------------------|---------|-------------|
| | T1 | T2 | | | |
| S1F-04 | 9/16 " X18 | 9/16 " X18 | 27.5 10 10 | 17 31 | 63 |
| S1F-06 | 11/16 " X16 | 11/16 " X16 | 31 11 11 | 19 48 | |
| S1F-08 | 13/16 " X16 | 13/16 " X16 | 35.5 13 13 | 22 67 | |
| S1F-10 | 1 " X14 | 1 " X14 | 42.5 15.5 15.5 | 27 121 | 40 |
| S1F-12 | 1.3/16 " X12 | 1.3/16 " X12 | 47 17 17 | 32 183 | |
| S1F-16 | 1.7/16 " X12 | 1.7/16 " X12 | 49.5 17.5 17.5 | 41 281 | |
| S1F-20 | 1.11/16 " X12 | 1.11/16 " X12 | 51.5 17.5 17.5 | 46 356 | 25 |
| S1F-24 | 2 " X12 | 2 " X12 | 53 17.5 17.5 | 55 503 | |

S1F9

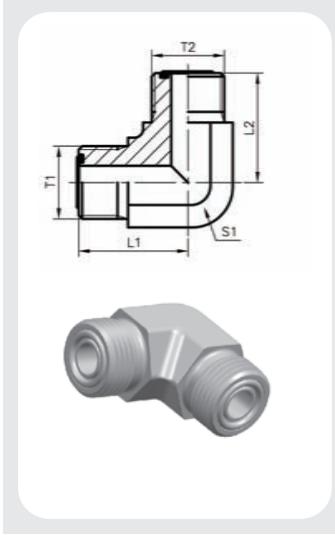90° 弯美制ORFS外螺纹O形圈平面密封
90° ORFS MALE O-RING


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | 重量 (g) | 工作压力 Mpa |
|----------------|---------------|---------------|------------------|-----------|-------------|
| | T1 | T2 | | | |
| S1F9-04 | 9/16 " X18 | 9/16 " X18 | 21.5 21.5 | 14 42 | 63 |
| S1F9-06 | 11/16 " X16 | 11/16 " X16 | 25 25 | 19 72 | |
| S1F9-08 | 13/16 " X16 | 13/16 " X16 | 28 28 | 19 98 | |
| S1F9-10 | 1 " X14 | 1 " X14 | 33.5 33.5 | 27 176 | 40 |
| S1F9-12 | 1.3/16 " X12 | 1.3/16 " X12 | 37.5 37.5 | 30 270 | |
| S1F9-16 | 1.7/16 " X12 | 1.7/16 " X12 | 41.5 41.5 | 36 406 | |
| S1F9-20 | 1.11/16 " X12 | 1.11/16 " X12 | 44.5 44.5 | 41 541 | 25 |
| S1F9-24 | 2 " X12 | 2 " X12 | 49 49 | 50 800 | |

S2F

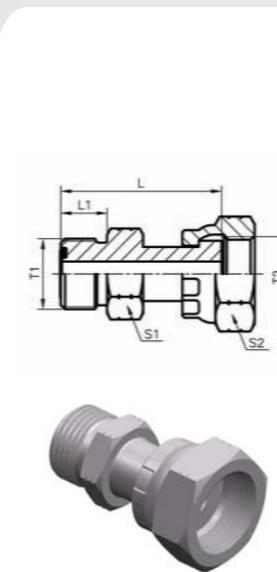美制ORFS外螺纹O形圈平面密封/ORFS内螺纹
ORFS MALE O-RING/ORFS FEMALE


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | 重量 g | 工作压力 Mpa |
|----------------|---------------|---------------|------------------|---------|-------------|
| | T1 | T2 | | | |
| S2F-04 | 9/16 " X18 | 9/16 " X18 | 33 10 17 19 | 37 | 63 |
| S2F-04-06 | 9/16 " X18 | 11/16 " X16 | 34.5 10 17 22 | 40 | |
| S2F-04-08 | 9/16 " X18 | 13/16 " X16 | 36.5 10 19 27 | 42 | |
| S2F-06-04 | 11/16 " X16 | 9/16 " X18 | 35.5 11 19 19 | 57 | 40 |
| S2F-06 | 11/16 " X16 | 11/16 " X16 | 38.5 11 19 22 | 62 | |
| S2F-06-08 | 11/16 " X16 | 13/16 " X16 | 37.7 11 19 27 | 62 | |
| S2F-06-10 | 11/16 " X16 | 1 " X14 | 43.7 11 24 30 | 73 | 40 |
| S2F-08-06 | 13/16 " X16 | 11/16 " X16 | 41 13 22 22 | 82 | |
| S2F-08 | 13/16 " X16 | 13/16 " X16 | 43 13 22 27 | 89 | |
| S2F-08-10 | 13/16 " X16 | 1 " X14 | 45.5 13 24 30 | 95 | 40 |
| S2F-08-12 | 13/16 " X16 | 1.3/16 " X12 | 49 13 30 36 | 101 | |
| S2F-10-08 | 1 " X14 | 13/16 " X16 | 47.5 15.5 27 27 | 146 | |
| S2F-10 | 1 " X14 | 1 " X14 | 51.5 15.5 27 30 | 156 | 40 |
| S2F-10-12 | 1 " X14 | 1.3/16 " X12 | 51.5 15.5 30 36 | 160 | |
| S2F-10-16 | 1 " X14 | 1.7/16 " X12 | 56 15.5 36 41 | 172 | |
| S2F-12-08 | 1.3/16 " X12 | 13/16 " X16 | 50.5 17 32 27 | 213 | 63 |
| S2F-12-10 | 1.3/16 " X12 | 1 " X14 | 54.5 17 32 30 | 228 | |
| S2F-12 | 1.3/16 " X12 | 1.3/16 " X12 | 56 17 32 36 | 236 | |
| S2F-12-16 | 1.3/16 " X12 | 1.7/16 " X12 | 58 17 36 41 | 245 | 40 |
| S2F-16-12 | 1.7/16 " X12 | 1.3/16 " X12 | 58 17.5 38 36 | 330 | |
| S2F-16 | 1.7/16 " X12 | 1.7/16 " X12 | 60 17.5 38 41 | 345 | |
| S2F-16-20 | 1.7/16 " X12 | 1.11/16 " X12 | 62 17.5 41 50 | 356 | 25 |
| S2F-20-16 | 1.11/16 " X12 | 1.7/16 " X12 | 58.5 17.5 46 41 | 415 | 40 |
| S2F-20 | 1.11/16 " X12 | 1.11/16 " X12 | 62 17.5 46 50 | 443 | |
| S2F-20-24 | 1.11/16 " X12 | 2 " X12 | 65.5 17.5 50 60 | 469 | |
| S2F-24-20 | 2 " X12 | 1.11/16 " X12 | 64 17.5 55 50 | 607 | 25 |
| S2F-24 | 2 " X12 | 2 " X12 | 64 17.5 55 60 | 614 | |

S2F9

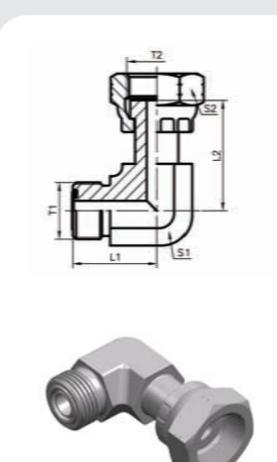90° 弯美制ORFS外螺纹O形圈平面密封/ORFS内螺纹
90° ELBOW ORFS MALE O-RING FEMALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | 重量 g | 工作压力 Mpa |
|----------------|---------------|---------------|------------------|---------|-------------|
| | T1 | T2 | | | |
| S2F9-04 | 9/16 " X18 | 9/16 " X18 | 21.5 26.5 14 17 | 56 | 63 |
| S2F9-06 | 11/16 " X16 | 11/16 " X16 | 25 29 19 22 | 90 | |
| S2F9-08 | 13/16 " X16 | 13/16 " X16 | 28 38 19 24 | 137 | |
| S2F9-10 | 1 " X14 | 1 " X14 | 33.5 41 27 30 | 230 | 40 |
| S2F9-12 | 1.3/16 " X12 | 1.3/16 " X12 | 37.5 46.5 30 36 | 355 | |
| S2F9-16 | 1.7/16 " X12 | 1.7/16 " X12 | 41.5 53.5 36 41 | 547 | |
| S2F9-20 | 1.11/16 " X12 | 1.11/16 " X12 | 44.5 58 41 50 | 734 | 25 |
| S2F9-24 | 2 " X12 | 2 " X12 | 49 61 50 60 | 1055 | |


SAF

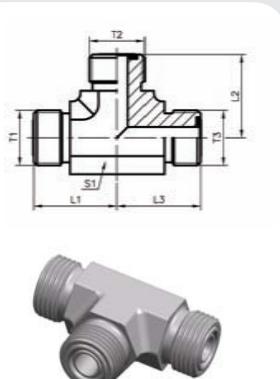美制ORFS外螺纹O形圈平面密封三通
ORFS MALE O-RING TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|---------------|---------------|---------------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | | |
| SAF-04 | 9/16 " X18 | 9/16 " X18 | 9/16 " X18 | 21.5 | 21.5 | 21.5 | 14 | 63 | 63 |
| SAF-06 | 11/16 " X16 | 11/16 " X16 | 11/16 " X16 | 25 | 25 | 25 | 19 | | |
| SAF-08 | 13/16 " X16 | 13/16 " X16 | 13/16 " X16 | 28 | 28 | 28 | 19 | | |
| SAF-10 | 1 " X14 | 1 " X14 | 1 " X14 | 33.5 | 33.5 | 33.5 | 27 | | |
| SAF-12 | 1.3/16 " X12 | 1.3/16 " X12 | 1.3/16 " X12 | 37.5 | 37.5 | 37.5 | 30 | | |
| SAF-16 | 1.7/16 " X12 | 1.7/16 " X12 | 1.7/16 " X12 | 41.5 | 41.5 | 41.5 | 36 | | |
| SAF-20 | 1.11/16 " X12 | 1.11/16 " X12 | 1.11/16 " X12 | 44.5 | 44.5 | 44.5 | 41 | | |
| SAF-24 | 2 " X12 | 2 " X12 | 2 " X12 | 49 | 49 | 49 | 48 | | |

E


SBF

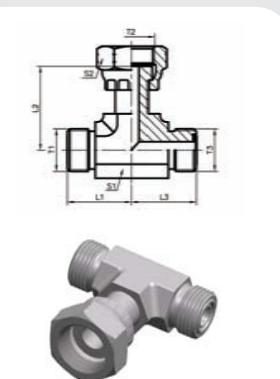美制ORFS外螺纹O形圈平面密封/美制ORFS内螺纹分支三通
ORFS MALE O-RING/ORFS FEMALE BRANCH TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|---------------|---------------|---------------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | | |
| SBF-04 | 9/16 " X18 | 9/16 " X18 | 9/16 " X18 | 21.5 | 26.5 | 21.5 | 14 | 63 | 63 |
| SBF-06 | 11/16 " X18 | 11/16 " X18 | 11/16 " X18 | 25 | 29 | 25 | 19 | | |
| SBF-08 | 13/16 " X18 | 13/16 " X18 | 13/16 " X18 | 28 | 38 | 28 | 19 | | |
| SBF-10 | 1 " X14 | 1 " X14 | 1 " X14 | 33.5 | 41 | 33.5 | 27 | | |
| SBF-12 | 1.3/16 " X12 | 1.3/16 " X12 | 1.3/16 " X12 | 37.5 | 46.5 | 37.5 | 30 | | |
| SBF-16 | 1.7/16 " X12 | 1.7/16 " X12 | 1.7/16 " X12 | 41.5 | 53.5 | 41.5 | 36 | | |
| SBF-20 | 1.11/16 " X12 | 1.11/16 " X12 | 1.11/16 " X12 | 44.5 | 58 | 44.5 | 41 | | |
| SBF-24 | 2 " X12 | 2 " X12 | 2 " X12 | 49 | 61 | 49 | 48 | | |

美制


SCF

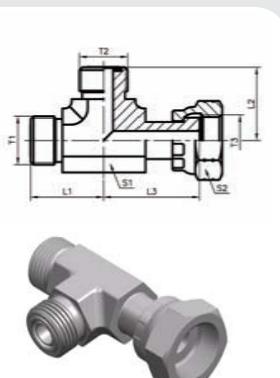美制ORFS外螺纹O形圈平面密封/美制ORFS内螺纹主支三通
ORFS MALE O-RING/ORFS FEMALE RUN TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|---------------|---------------|---------------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | | |
| SCF-04 | 9/16 " X18 | 9/16 " X18 | 9/16 " X18 | 21.5 | 21.5 | 26.5 | 14 | 63 | 63 |
| SCF-06 | 11/16 " X18 | 11/16 " X18 | 11/16 " X18 | 25 | 25 | 29 | 19 | | |
| SCF-08 | 13/16 " X18 | 13/16 " X18 | 13/16 " X18 | 28 | 28 | 38 | 19 | | |
| SCF-10 | 1 " X14 | 1 " X14 | 1 " X14 | 33.5 | 33.5 | 41 | 27 | | |
| SCF-12 | 1.3/16 " X12 | 1.3/16 " X12 | 1.3/16 " X12 | 37.5 | 37.5 | 46.5 | 30 | | |
| SCF-16 | 1.7/16 " X12 | 1.7/16 " X12 | 1.7/16 " X12 | 41.5 | 41.5 | 53.5 | 36 | | |
| SCF-20 | 1.11/16 " X12 | 1.11/16 " X12 | 1.11/16 " X12 | 44.5 | 44.5 | 58 | 41 | | |
| SCF-24 | 2 " X12 | 2 " X12 | 2 " X12 | 49 | 49 | 61 | 50 | | |

美制


S4F

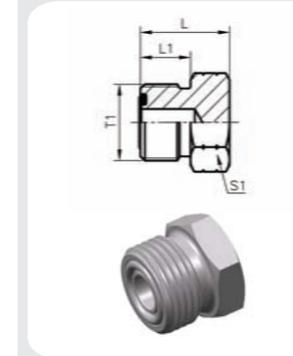美制ORFS外螺纹O形圈平面密封堵头
ORFS MALE O-RING PLUG

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|---------------|--|--|---------------|------|------|----|---------|-------------|
| | T1 | | | L | L1 | S1 | | | |
| S4F-04 | 9/16 " X18 | | | | 16.5 | 10 | 17 | 63 | 63 |
| S4F-06 | 11/16 " X16 | | | | 19 | 11 | 19 | | |
| S4F-08 | 13/16 " X16 | | | | 22 | 13 | 22 | | |
| S4F-10 | 1 " X14 | | | | 26 | 15.5 | 27 | | |
| S4F-12 | 1.3/16 " X12 | | | | 27.5 | 17 | 32 | | |
| S4F-16 | 1.7/16 " X12 | | | | 28 | 17.5 | 41 | | |
| S4F-20 | 1.11/16 " X12 | | | | 28 | 17.5 | 46 | | |
| S4F-24 | 2 " X12 | | | | 28 | 17.5 | 55 | | |

E


S9F

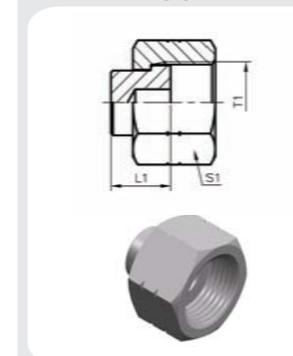
美制ORFS内螺纹平面密封堵头
ORFS FEMALE PLUG

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|---------------|--|--|---------------|------|--|----|---------|-------------|
| | T1 | | | L1 | | | S1 | | |
| S9F-04 | 9/16 " X18 | | | | 8.5 | | | 63 | 63 |
| S9F-06 | 11/16 " X16 | | | | 10 | | | | |
| S9F-08 | 13/16 " X16 | | | | 11 | | | | |
| S9F-10 | 1 " X14 | | | | 13.5 | | | | |
| S9F-12 | 1.3/16 " X12 | | | | 15 | | | | |
| S9F-16 | 1.7/16 " X12 | | | | 15 | | | | |
| S9F-20 | 1.11/16 " X12 | | | | 15 | | | | |
| S9F-24 | 2 " X12 | | | | 16 | | | | |

E


S6F-LN

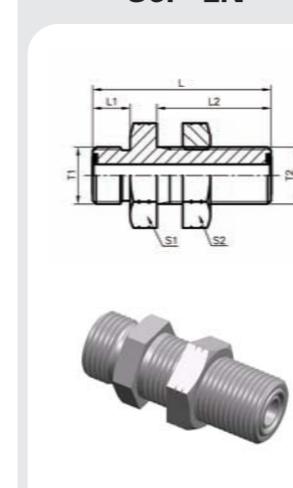美制ORFS外螺纹O形圈平面密封过板接头
ORFS MALE O-RING BULKHEAD

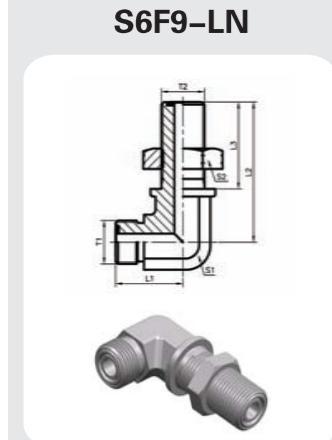


| 90° 弯美制ORFS外螺纹O形圈平面密封过板接头 90° ELBOW ORFS MALE O-RING BULKHEAD | | | | | | | | |
|--|--------------|--------------|---------------|------|------|----|---------|-------------|
| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
| | T1 | T2 | L1 | L2 | L3 | S1 | | |
| S6F9-04LN | 9/16" X18 | 9/16" X18 | 22.5 | 47 | 31.5 | 14 | 22 | 85 |
| S6F9-06LN | 11/16" X16 | 11/16" X16 | 26 | 52 | 34 | 19 | 27 | 137 |
| S6F9-08LN | 13/16" X16 | 13/16" X16 | 29 | 55.5 | 36.5 | 19 | 30 | 185 |
| S6F9-10LN | 1" X14 | 1" X14 | 34.5 | 63 | 40.5 | 27 | 36 | 313 |
| S6F9-12LN | 1.3/16" X12 | 1.3/16" X12 | 38.5 | 67 | 41.5 | 30 | 41 | 435 |
| S6F9-16LN | 1.7/16" X12 | 1.7/16" X12 | 42.5 | 71 | 42 | 36 | 46 | 638 |
| S6F9-20LN | 1.11/16" X12 | 1.11/16" X12 | 45.5 | 75.5 | 42 | 41 | 50 | 822 |
| S6F9-24LN | 2" X12 | 2" X12 | 49.5 | 79.5 | 42 | 48 | 60 | 1180 |

E

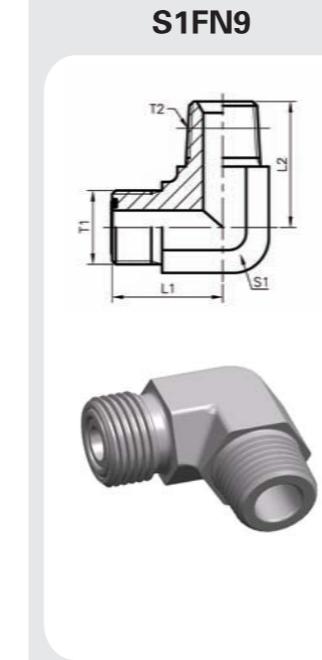


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|-----------------|---------------|------|----|--|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | | | |
| S1FN9-04-02 | 9/16" X18 | NPT1/8" X27 | 21.5 | 20.5 | 14 | | 33 | 34.5 |
| S1FN9-04 | 9/16" X18 | NPT1/4" X18 | 21.5 | 25.5 | 14 | | 43 | 27.5 |
| S1FN9-06-04 | 11/16" X16 | NPT1/4" X18 | 25 | 27.5 | 19 | | 61 | |
| S1FN9-06 | 11/16" X16 | NPT3/8" X18 | 25 | 31 | 19 | | 84 | |
| S1FN9-06-08 | 11/16" X16 | NPT1/2" X14 | 29.5 | 37.5 | 22 | | 112 | |
| S1FN9-08-06 | 13/16" X16 | NPT3/8" X18 | 28 | 31 | 19 | | 95 | |
| S1FN9-08 | 13/16" X16 | NPT1/2" X14 | 31 | 37 | 22 | | 114 | |
| S1FN9-08-12 | 13/16" X16 | NPT3/4" X14 | 33.3 | 40.5 | 27 | | 170 | 17 |
| S1FN9-10-08 | 1" X14 | NPT1/2" X14 | 33.5 | 40 | 27 | | 172 | 21 |
| S1FN9-10-12 | 1" X14 | NPT3/4" X14 | 36 | 40.5 | 27 | | 216 | 17 |
| S1FN9-12-08 | 1.3/16" X12 | NPT1/2" X14 | 37.3 | 40.5 | 30 | | 228 | 21 |
| S1FN9-12 | 1.3/16" X12 | NPT3/4" X14 | 37.3 | 45.5 | 30 | | 275 | 17 |
| S1FN9-12-16 | 1.3/16" X12 | NPT1" X11.5 | 41 | 50 | 33 | | 363 | 14 |
| S1FN9-16-12 | 1.7/16" X12 | NPT3/4" X14 | 42 | 46 | 36 | | 360 | 17 |
| S1FN9-16 | 1.7/16" X12 | NPT1" X11.5 | 42 | 50.5 | 36 | | 433 | |
| S1FN9-20-16 | 1.11/16" X12 | NPT1" X11.5 | 45 | 54.5 | 41 | | 530 | 14 |
| S1FN9-20 | 1.11/16" X12 | NPT1.1/4" X11.5 | 45 | 60 | 41 | | 574 | 8 |
| S1FN9-24 | 2" X12 | NPT1.1/2" X11.5 | 48.8 | 67 | 48 | | 972 | 7 |

E

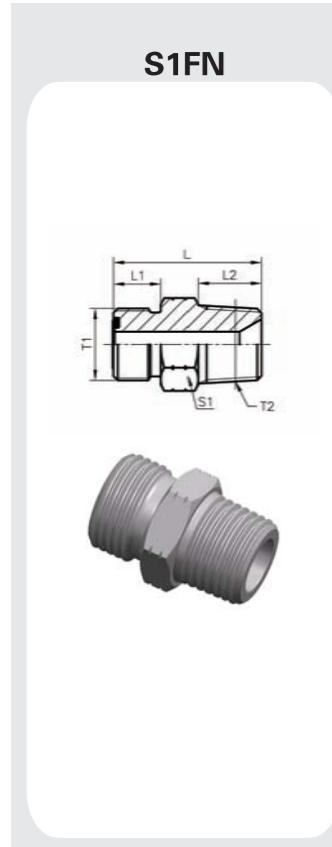


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|-----------------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | L | L1 | L2 | S1 | | |
| S1FN-04-02 | 9/16" X18 | NPT1/8" X27 | 27 | 10 | 10 | 17 | 27 | 34.5 |
| S1FN-04 | 9/16" X18 | NPT1/4" X18 | 32 | 10 | 14.5 | 17 | 33 | 27.5 |
| S1FN-04-06 | 9/16" X18 | NPT3/8" X18 | 33.5 | 10 | 14.5 | 19 | 45 | 21 |
| S1FN-04-08 | 9/16" X18 | NPT1/2" X14 | 38.5 | 10 | 19.5 | 22 | 67 | |
| S1FN-06-04 | 11/16" X16 | NPT1/4" X18 | 32 | 11 | 14.5 | 19 | 40 | 27.5 |
| S1FN-06 | 11/16" X16 | NPT3/8" X18 | 34 | 11 | 14.5 | 19 | 49 | 21 |
| S1FN-06-08 | 11/16" X16 | NPT1/2" X14 | 39.5 | 11 | 19.5 | 22 | 72 | |
| S1FN-08-04 | 13/16" X16 | NPT1/4" X18 | 37.5 | 13 | 14.5 | 22 | 60 | 27.5 |
| S1FN-08-06 | 13/16" X16 | NPT3/8" X18 | 37.5 | 13 | 14.5 | 22 | 65 | 21 |
| S1FN-08 | 13/16" X16 | NPT1/2" X14 | 41.5 | 13 | 19.5 | 22 | 77 | |
| S1FN-08-12 | 13/16" X16 | NPT3/4" X14 | 43 | 13 | 19.5 | 30 | 120 | 17 |
| S1FN-10-06 | 1" X14 | NPT3/8" X18 | 41.5 | 15.5 | 14.5 | 27 | 103 | 21 |
| S1FN-10-08 | 1" X14 | NPT1/2" X14 | 46 | 15.5 | 19.5 | 27 | 115 | 21 |
| S1FN-10-12 | 1" X14 | NPT3/4" X14 | 46 | 15.5 | 19.5 | 30 | 142 | 17 |
| S1FN-12-08 | 1.3/16" X12 | NPT1/2" X14 | 49 | 17 | 19.5 | 32 | 160 | 21 |
| S1FN-12 | 1.3/16" X12 | NPT3/4" X14 | 49 | 17 | 19.5 | 32 | 176 | 17 |
| S1FN-12-16 | 1.3/16" X12 | NPT1" X11.5 | 54 | 17 | 24.5 | 36 | 230 | 14 |
| S1FN-16-12 | 1.7/16" X12 | NPT3/4" X14 | 51 | 17.5 | 19.5 | 41 | 270 | 17 |
| S1FN-16 | 1.7/16" X12 | NPT1" X11.5 | 55.5 | 17.5 | 24.5 | 41 | 283 | 14 |
| S1FN-16-20 | 1.7/16" X12 | NPT1.1/4" X11.5 | 58.5 | 17.5 | 25.5 | 46 | 390 | 8 |
| S1FN-20-16 | 1.11/16" X12 | NPT1" X11.5 | 57.5 | 17.5 | 24.5 | 46 | 345 | 14 |
| S1FN-20 | 1.11/16" X12 | NPT1.1/4" X11.5 | 58.5 | 17.5 | 25.5 | 46 | 395 | 8 |
| S1FN-24 | 2" X12 | NPT1.1/2" X11.5 | 61 | 17.5 | 26.5 | 55 | 552 | 7 |

美制

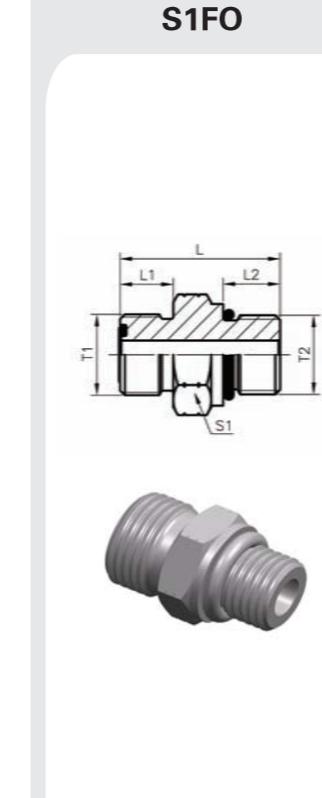


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|------------|-----------|---------------|----|----|----|---------|-------------|
| | T1 | T2 | L | L1 | L2 | S1 | | |
| S1FO-04 | 9/16" X18 | 7/16" X20 | 28.7 | 10 | 11 | 17 | 30 | |
| S1FO-04-05 | 9/16" X18 | 1/2" X20 | 28.7 | 10 | 11 | 17 | 32 | |
| S1FO-04-06 | 9/16" X18 | 9/16" X18 | 30.5 | 10 | 12 | 19 | 41 | |
| S1FO-04-08 | 9/16" X18 | 3/4" X16 | 33.6 | 10 | 14 | 22 | 65 | |
| S1FO-06-04 | 11/16" X16 | 7/16" X20 | 31 | 11 | 11 | 19 | 40 | |
| S1FO-06-05 | 11/16" X16 | 1/2" X20 | 30.9 | 11 | 11 | 19 | 42 | |
| S1FO-06 | 11/16" X16 | 9/16" X18 | 31.9 | 11 | 12 | 19 | 45 | |

S1FO9-OG

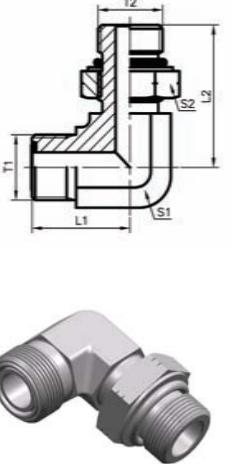90° 弯美制ORFS外螺纹O型圈平面密封/美制SAE外螺纹带O形圈重系列ISO 11926-2
90° ELBOW ORFS MALE O-RING/SAE O-RING BOSS S-SERIES ISO 11926-2


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|-------------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | | |
| S1FO9-04OG | 9/16" X18 | 7/16" X18 | 21.5 | 33 | 14 | 14 | 47 | |
| S1FO9-04-06OG | 9/16" X18 | 9/16" X18 | 23.5 | 37 | 14 | 17 | 63 | |
| S1FO9-04-08OG | 9/16" X18 | 3/4" X16 | 24.5 | 40.5 | 19 | 22 | 99 | |
| S1FO9-06OG | 11/16" X16 | 9/16" X18 | 25 | 37 | 19 | 17 | 77 | |
| S1FO9-06-04OG | 11/16" X16 | 7/16" X20 | 25 | 35 | 19 | 14 | 65 | |
| S1FO9-06-05OG | 11/16" X16 | 1/2" X20 | 25 | 35 | 19 | 17 | 70 | |
| S1FO9-06-08OG | 11/16" X16 | 3/4" X16 | 25 | 40.5 | 19 | 22 | 115 | |
| S1FO9-06-10OG | 11/16" X16 | 7/8" X14 | 29.5 | 50 | 22 | 27 | 157 | |
| S1FO9-06-12OG | 11/16" X16 | 1.1/16" X12 | 32.5 | 55 | 27 | 32 | 225 | |
| S1FO9-08OG | 13/16" X16 | 3/4" X16 | 28 | 40.5 | 19 | 22 | 129 | |
| S1FO9-08-06OG | 13/16" X16 | 9/16" X18 | 28 | 36.5 | 19 | 17 | 93 | |
| S1FO9-08-10OG | 13/16" X16 | 7/8" X14 | 31 | 50 | 22 | 27 | 172 | |
| S1FO9-08-12OG | 13/16" X16 | 1.1/16" X12 | 33.5 | 55 | 27 | 32 | 240 | |
| S1FO9-10OG | 1" X14 | 7/8" X14 | 33.5 | 50 | 27 | 27 | 211 | |
| S1FO9-10-08OG | 1" X14 | 3/4" X16 | 33.5 | 46 | 27 | 22 | 184 | |
| S1FO9-10-12OG | 1" X14 | 1.1/16" X12 | 36 | 55 | 27 | 32 | 282 | |
| S1FO9-12OG | 1.3/16" X12 | 1.1/16" X12 | 37.5 | 55 | 30 | 32 | 329 | |
| S1FO9-12-08OG | 1.3/16" X12 | 3/4" X16 | 37.5 | 47 | 30 | 22 | 240 | |
| S1FO9-12-10OG | 1.3/16" X12 | 7/8" X14 | 37.5 | 51 | 30 | 27 | 268 | |
| S1FO9-12-16OG | 1.3/16" X12 | 1.5/16" X12 | 41 | 60 | 36 | 41 | 437 | 31.5 |
| S1FO9-16OG | 1.7/16" X12 | 1.5/16" X12 | 41.5 | 60 | 36 | 41 | 502 | |
| S1FO9-16-12OG | 1.7/16" X12 | 1.1/16" X12 | 41.5 | 59 | 36 | 32 | 422 | 40 |
| S1FO9-16-20OG | 1.7/16" X12 | 1.5/8" X12 | 44.5 | 62 | 41 | 50 | 649 | 25 |
| S1FO9-20OG | 1.11/16" X12 | 1.5/8" X12 | 44.5 | 62 | 41 | 50 | 711 | |
| S1FO9-20-16OG | 1.11/16" X12 | 1.5/16" X12 | 44.5 | 61.5 | 41 | 41 | 588 | 31.5 |
| S1FO9-20-24OG | 1.11/16" X12 | 1.7/8" X12 | 49 | 66 | 48 | 55 | 857 | 20 |
| S1FO9-24OG | 2" X12 | 1.7/8" X12 | 49 | 66 | 48 | 55 | 976 | |
| S1FO9-24-20OG | 2" X12 | 1.5/8" X12 | 49 | 66 | 48 | 50 | 888 | 25 |

S1FM-WD

美制ORFS外螺纹O型圈平面密封/公制螺纹胶垫密封
ORFS MALE O-RING/METRIC THREAD MALE CAPTIVE SEAL


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|---------|---------------|----|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1FM-04-12WD | 9/16" X18 | M12X1.5 | 10 | 12 | 29.7 | 17 | 32 | |
| S1FM-06-14WD | 11/16" X16 | M14X1.5 | 11 | 12 | 31.9 | 19 | 51 | |
| S1FM-06-16WD | 11/16" X16 | M16X1.5 | 11 | 12 | 31.9 | 22 | 55 | 63 |
| S1FM-08-18WD | 13/16" X16 | M18X1.5 | 13 | 12 | 34.6 | 24 | 74 | |
| S1FM-10-22WD | 1" X14 | M22X1.5 | 15.5 | 14 | 41.1 | 27 | 118 | |
| S1FM-12-27WD | 1.3/16" X12 | M27X2 | 17 | 16 | 46.1 | 32 | 185 | 42 |
| S1FM-16-33WD | 1.7/16" X12 | M33X2 | 17.5 | 18 | 49.8 | 41 | 275 | |
| S1FM-20-42WD | 1.11/16" X12 | M42X2 | 17.5 | 20 | 53.8 | 50 | 421 | 28 |

S1FH

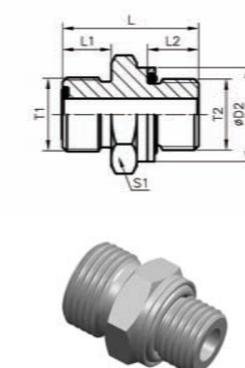美制ORFS外螺纹O型圈平面密封/公制外螺纹重系列ISO 6149-2
ORFS MALE O-RING /METRIC MALE S-SERIES ISO 6149-2


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|--------------|---------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1FH-04-12 | 9/16" X18 | M12X1.5 | 10 | 11 | 28.5 | 17 | 30 | |
| S1FH-04-14 | 9/16" X18 | M14X1.5 | 10 | 11 | 29.5 | 19 | 40 | |
| S1FH-06-12 | 11/16" X16 | M12X1.5 | 11 | 11 | 32 | 19 | 45 | |
| S1FH-06-14 | 11/16" X16 | M14X1.5 | 11 | 11 | 32 | 19 | 48 | |
| S1FH-06-16 | 11/16" X16 | M16X1.5 | 11 | 11.5 | 33.5 | 22 | 60 | |
| S1FH-06-18 | 11/16" X16 | M18X1.5 | 11 | 12.5 | 36 | 24 | 78 | |
| S1FH-08-14 | 13/16" X16 | M14X1.5 | 13 | 11 | 35 | 22 | 65 | |
| S1FH-08-16 | 13/16" X16 | M16X1.5 | 13 | 11.5 | 36.5 | 22 | 76 | |
| S1FH-08-18 | 13/16" X16 | M18X1.5 | 13 | 12.5 | 37 | 24 | 80 | |
| S1FH-08-22 | 13/16" X16 | M22X1.5 | 13 | 13 | 39.5 | 27 | 106 | |
| S1FH-08-27 | 13/16" X16 | M27X2 | 13 | 16 | 44 | 32 | 160 | |
| S1FH-10-18 | 1" X14 | M18X1.5 | 15.5 | 12.5 | 41 | 27 | 115 | |
| S1FH-10-22 | 1" X14 | M22X1.5 | 15.5 | 13 | 42 | 27 | 123 | |
| S1FH-10-27 | 1" X14 | M27X2 | 15.5 | 16.5 | 47 | 32 | 178 | |
| S1FH-12-22 | 1.3/16" X12 | M22X1.5 | 17 | 13 | 45 | 32 | 175 | |
| S1FH-12-27 | 1.3/16" X12 | M27X2 | 17 | 16 | 48.5 | 32 | 198 | |
| S1FH-12-33 | 1.3/16" X12 | M33X2 | 17 | 16 | 51.5 | 41 | 309 | |
| S1FH-16-33 | 1.7/16" X12 | M33X2 | 17.5 | 16 | 52 | 41 | 300 | |
| S1FH-20-42 | 1.11/16" X12 | M42X2 | 17.5 | 16 | 54.5 | 50 | 451 | 25 |
| S1FH-24-48 | 2" X12 | M48X2 | 17.5 | 17.5 | 57 | 55 | 557 | |

S1FH9-OG

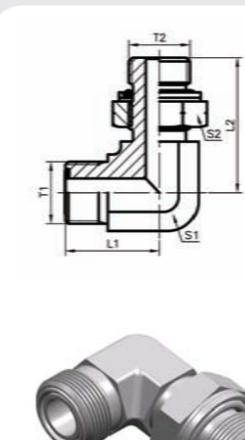90° 弯美制ORFS外螺纹O型圈平面密封/公制外螺纹可调向柱端轻系列 ISO 6149
90° ELBOW ORFS MALE O-RING/METRIC THREAD ADJUSTABLE STUD END L-SERIES ISO 6149

| 代号 PART NO. | 螺纹 THREAD | |
|----------------|-----------|--|
|----------------|-----------|--|


S1FB-WD

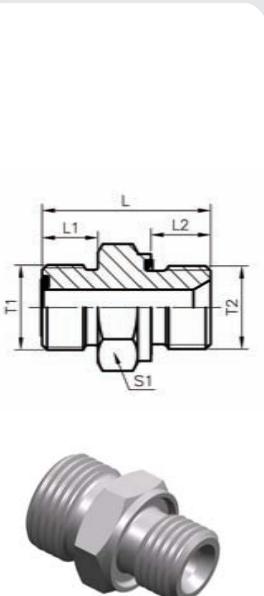

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|---------------|--------------|---------------|----|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | L | S1 | | |
| S1FB-04-02WD | 9/16 " X18 | G1/8 " X28 | 10 | 8 | 25.7 | 17 | 27 | |
| S1FB-04WD | 9/16 " X18 | G1/4 " X19 | 10 | 12 | 30.9 | 19 | 40 | |
| S1FB-04-06WD | 9/16 " X18 | G3/8 " X19 | 10 | 12 | 31.6 | 22 | 53 | |
| S1FB-04-08WD | 9/16 " X18 | G1/2 " X14 | 10 | 14 | 38.4 | 27 | 98 | |
| S1FB-06-02WD | 11/16 " X16 | G1/8 " X28 | 11 | 8 | 31.1 | 19 | 45 | |
| S1FB-06-04WD | 11/16 " X16 | G1/4 " X19 | 11 | 12 | 31.9 | 19 | 45 | |
| S1FB-06WD | 11/16 " X16 | G3/8 " X19 | 11 | 12 | 33.5 | 22 | 61 | |
| S1FB-06-08WD | 11/16 " X16 | G1/2 " X14 | 11 | 14 | 38.5 | 27 | 100 | |
| S1FB-06-12WD | 11/16 " X16 | G3/4 " X14 | 11 | 16 | 40.3 | 32 | 144 | |
| S1FB-08-04WD | 13/16 " X16 | G1/4 " X19 | 13 | 12 | 36.7 | 22 | 66 | |
| S1FB-08-06WD | 13/16 " X16 | G3/8 " X19 | 13 | 12 | 34.6 | 22 | 65 | |
| S1FB-08WD | 13/16 " X16 | G1/2 " X14 | 13 | 14 | 40.1 | 27 | 103 | |
| S1FB-08-12WD | 13/16 " X16 | G3/4 " X14 | 13 | 16 | 41.9 | 32 | 146 | |
| S1FB-10-06WD | 1 " X14 | G3/8 " X19 | 15.5 | 12 | 42.4 | 27 | 119 | |
| S1FB-10-08WD | 1 " X14 | G1/2 " X14 | 15.5 | 14 | 41.1 | 27 | 114 | |
| S1FB-10-12WD | 1 " X14 | G3/4 " X14 | 15.5 | 16 | 44.3 | 32 | 162 | |
| S1FB-10-16WD | 1 " X14 | G1 " X11 | 15.5 | 18 | 47.8 | 41 | 264 | |
| S1FB-12-08WD | 1.3/16 " X12 | G1/2 " X14 | 17 | 14 | 48.5 | 32 | 180 | |
| S1FB-12WD | 1.3/16 " X12 | G3/4 " X14 | 17 | 16 | 46.1 | 32 | 182 | |
| S1FB-12-16WD | 1.3/16 " X12 | G1 " X11 | 17 | 18 | 47.5 | 41 | 265 | |
| S1FB-12-20WD | 1.3/16 " X12 | G1.1/4 " X11 | 17 | 20 | 53.5 | 50 | 400 | |
| S1FB-16-12WD | 1.7/16 " X12 | G3/4 " X14 | 17.5 | 16 | 50.3 | 41 | 256 | |
| S1FB-16WD | 1.7/16 " X12 | G1 " X11 | 17.5 | 18 | 49.8 | 41 | 276 | |
| S1FB-16-20WD | 1.7/16 " X12 | G1.1/4 " X11 | 17.5 | 20 | 53.8 | 50 | 416 | |
| S1FB-16-24WD | 1.7/16 " X12 | G1.1/2 " X11 | 17.5 | 22 | 57.5 | 55 | 514 | |
| S1FB-20-16WD | 1.11/16 " X12 | G1 " X11 | 17.5 | 18 | 57.3 | 46 | 425 | |
| S1FB-20WD | 1.11/16 " X12 | G1.1/4 " X11 | 17.5 | 20 | 53.8 | 50 | 420 | |
| S1FB-20-24WD | 1.11/16 " X12 | G1.1/2 " X11 | 17.5 | 22 | 57.6 | 55 | 520 | |
| S1FB-24WD | 2 " X12 | G1.1/2 " X11 | 17.5 | 22 | 57.6 | 55 | 537 | |

63 42 28


S1FG9-OG

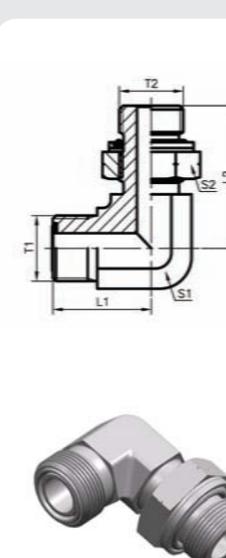90° 弯美制ORFS外螺纹O型圈平面密封/英管外螺纹O型圈
90° ELBOW ORFS MALE O-RING/BSP MALE O-RING

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|---------------|--------------|---------------|------|----|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | S2 | | |
| S1FG9-04-02OG | 9/16 " X18 | G1/8 " X28 | 21.5 | 30 | 14 | 14 | 40 | 31.5 |
| S1FG9-04OG | 9/16 " X18 | G1/4 " X19 | 23.5 | 36 | 17 | 19 | 63 | |
| S1FG9-04-06OG | 9/16 " X18 | G3/8 " X19 | 24.5 | 38 | 19 | 22 | 85 | 25 |
| S1FG9-06-04OG | 11/16 " X16 | G1/4 " X19 | 25 | 36 | 19 | 19 | 72 | 31.5 |
| S1FG9-06OG | 11/16 " X16 | G3/8 " X19 | 26.5 | 38 | 19 | 22 | 100 | 25 |
| S1FG9-08-04OG | 13/16 " X16 | G1/4 " X19 | 28 | 35.5 | 19 | 19 | 88 | 31.5 |
| S1FG9-08-06OG | 13/16 " X16 | G3/8 " X19 | 28 | 38 | 19 | 22 | 115 | 25 |
| S1FG9-08OG | 13/16 " X16 | G1/2 " X14 | 31 | 48.5 | 22 | 27 | 168 | |
| S1FG9-08-12OG | 13/16 " X16 | G3/4 " X14 | 33.5 | 51.5 | 27 | 36 | 245 | 16 |
| S1FG9-10-06OG | 1 " X14 | G3/8 " X19 | 33.5 | 40.5 | 27 | 22 | 164 | |
| S1FG9-10-08OG | 1 " X14 | G1/2 " X14 | 33.5 | 48.5 | 27 | 27 | 208 | 25 |
| S1FG9-10-12OG | 1 " X14 | G3/4 " X14 | 33.5 | 51.5 | 27 | 36 | 287 | |
| S1FG9-10-16OG | 1 " X14 | G1 " X11 | 39.5 | 58.5 | 33 | 41 | 440 | 16 |
| S1FG9-12-08OG | 1.3/16 " X12 | G1/2 " X14 | 37.5 | 49.5 | 30 | 27 | 265 | 25 |
| S1FG9-12OG | 1.3/16 " X12 | G3/4 " X14 | 37.5 | 51.5 | 30 | 36 | 335 | |
| S1FG9-12-16OG | 1.3/16 " X12 | G1 " X11 | 41 | 48.5 | 33 | 41 | 437 | |
| S1FG9-16-12OG | 1.7/16 " X12 | G3/4 " X14 | 41.5 | 56 | 36 | 36 | 402 | |
| S1FG9-16OG | 1.7/16 " X12 | G1 " X11 | 41.5 | 5.8 | 36 | 41 | 264 | |
| S1FG9-16-20OG | 1.7/16 " X12 | G1.1/4 " X11 | 44.5 | 61 | 41 | 50 | 662 | |
| S1FG9-20-16OG | 1.11/16 " X12 | G1 " X11 | 44.5 | 61 | 41 | 41 | 584 | |
| S1FG9-20OG | 1.11/16 " X12 | G1.1/4 " X11 | 44.5 | 61 | 41 | 50 | 725 | |
| S1FG9-20-24OG | 1.11/16 " X12 | G1.1/2 " X11 | 49 | 64.5 | 50 | 55 | 852 | |
| S1FG9-24OG | 2 " X12 | G1.1/2 " X11 | 49 | 64.5 | 50 | 55 | 972 | |


注：需配挡圈请在代号后加“DQ”，如 S1FG9-16OGDQ
Note: If you interested to order the adapter with retainer ring please insert suffix “DQ” after our part NO, for example S1FG9-16OGDQ

SAFFH-OG

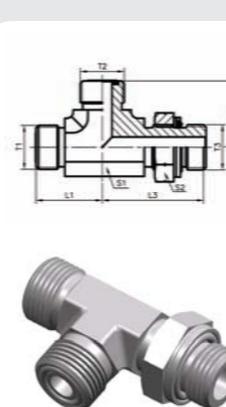

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|------------------|--------------|--------------|---------------|------|------|------|---------|-------------|
| | T1 | T2 | L1 | L2 | L3 | S1 | | |
| SAFFH-04-04-12OG | 9/16 " X18 | 9/16 " X18 | M12X1.5 | 21.5 | 21.5 | 33 | 14 | 75 |
| SAFFH-04-04-14OG | 9/16 " X18 | 9/16 " X18 | M14X1.5 | 23.5 | 23.5 | 35.5 | 17 | 95 |
| SAFFH-06-06-14OG | 11/16 " X16 | 11/16 " X16 | M14X1.5 | 25 | 25 | 35.5 | 19 | 122 |
| SAFFH-06-06-16OG | 11/16 " X16 | 11/16 " X16 | M16X1.5 | 25 | 25 | 37.5 | 19 | 133 |
| SAFFH-08-08-14OG | 13/16 " X16 | 13/16 " X16 | M14X1.5 | 28 | 28 | 36 | 19 | 140 |
| SAFFH-08-08-18OG | 13/16 " X16 | 13/16 " X16 | M18X1.5 | 28 | 28 | 41 | 19 | 175 |
| SAFFH-08-08-22OG | 13/16 " X16 | 13/16 " X16 | M22X1.5 | 31 | 31 | 49 | 22 | 247 |
| SAFFH-10-10-22OG | 1 " X14 | 1 " X14 | M22X1.5 | 33.5 | 33.5 | 49 | 27 | 325 |
| SAFFH-12-12-27OG | 1.3/16 " X12 | 1.3/16 " X12 | M27X2 | 37.5 | 37.5 | 55.5 | 30 | 517 |
| SAFFH-16-16-33OG | 1.7/16 " X12 | 1.7/16 " X12 | M | | | | | |

SAFFO-OG

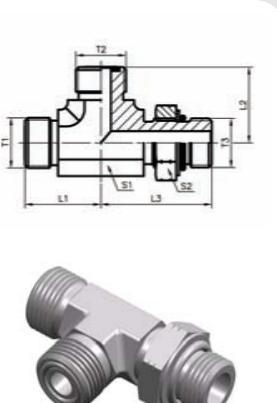

美制ORFS外螺纹O型圈平面密封/美制SAE外螺纹带O型圈重系列ISO 11926-2主支三通
ORFS MALE O-RING/SAE O-RING BOSS S-SERIES ISO 11926-2 RUN TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|------------------|---------------|---------------|--------------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | | |
| SAFFO-040G | 9/16 " X18 | 9/16 " X18 | 7/16 " X18 | 21.5 | 21.5 | 33 | 14 | 17 | 72 |
| SAFFO-04-04-060G | 9/16 " X18 | 9/16 " X18 | 9/16 " X18 | 23.5 | 23.5 | 33 | 14 | 19 | 98 |
| SAFFO-060G | 11/16 " X16 | 11/16 " X16 | 9/16 " X18 | 25 | 25 | 37 | 19 | 19 | 121 |
| SAFFO-06-06-080G | 11/16 " X16 | 11/16 " X16 | 3/4 " X16 | 25 | 25 | 40.5 | 19 | 24 | 170 |
| SAFFO-080G | 13/16 " X16 | 13/16 " X16 | 3/4 " X16 | 28 | 28 | 40.5 | 19 | 24 | 184 |
| SAFFO-08-08-100G | 13/16 " X16 | 13/16 " X16 | 7/8 " X14 | 30.5 | 30.5 | 50 | 27 | 27 | 250 |
| SAFFO-100G | 1 " X14 | 1 " X14 | 7/8 " X14 | 33.5 | 33.5 | 50 | 22 | 27 | 315 |
| SAFFO-10-10-120G | 1 " X14 | 1 " X14 | 1.1/16 " X12 | 36.5 | 36.5 | 52 | 27 | 32 | 423 |
| SAFFO-120G | 1.3/16 " X12 | 1.3/16 " X12 | 1.1/16 " X12 | 37.5 | 37.5 | 55 | 30 | 32 | 487 |
| SAFFO-12-12-160G | 1.3/16 " X12 | 1.3/16 " X12 | 1.5/16 " X12 | 41 | 41 | 60 | 36 | 41 | 675 |
| SAFFO-160G | 1.7/16 " X12 | 1.7/16 " X12 | 1.5/16 " X12 | 41.5 | 41.5 | 60 | 33 | 41 | 740 |
| SAFFO-16-16-200G | 1.7/16 " X12 | 1.7/16 " X12 | 1.5/8 " X12 | 44.5 | 44.5 | 62 | 41 | 50 | 905 |
| SAFFO-200G | 1.11/16 " X12 | 1.11/16 " X12 | 1.5/8 " X12 | 44.5 | 44.5 | 62 | 41 | 50 | 1030 |
| SAFFO-240G | 2 " X12 | 2 " X12 | 1.7/8 " X12 | 49 | 49 | 66 | 50 | 55 | 1446 |
| | | | | | | | | | 20 |


40

31.5

25

20

SAFFG-OG

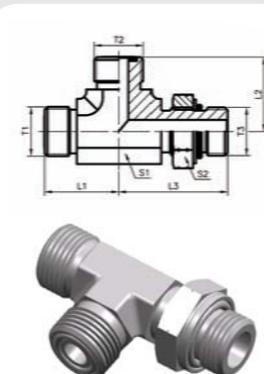

美制ORFS外螺纹O型圈平面密封/英管外螺纹O形圈主支三通
ORFS MALE O-RING/BSP MALE O-RING RUN TEE

| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|------------------|--------------|--------------|------------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | | |
| SAFFG-04-04-020G | 9/16 " X18 | 9/16 " X18 | G1/8 " X28 | 21.5 | 21.5 | 30 | 14 | 14 | 65 |
| SAFFG-040G | 9/16 " X18 | 9/16 " X18 | G1/4 " X19 | 23.5 | 23.5 | 36 | 19 | 19 | 90 |
| SAFFG-06-06-040G | 11/16 " X16 | 11/16 " X16 | G1/4 " X19 | 25 | 25 | 36 | 19 | 19 | 118 |
| SAFFG-060G | 11/16 " X16 | 11/16 " X16 | G3/8 " X19 | 26.5 | 26.5 | 38 | 19 | 22 | 145 |
| SAFFG-08-08-060G | 13/16 " X16 | 13/16 " X16 | G3/8 " X19 | 28 | 28 | 38 | 19 | 22 | 160 |
| SAFFG-080G | 13/16 " X16 | 13/16 " X16 | G1/2 " X14 | 31 | 31 | 48.5 | 27 | 27 | 232 |
| SAFFG-10-10-080G | 1 " X14 | 1 " X14 | G1/2 " X14 | 33.5 | 33.5 | 48.5 | 27 | 27 | 312 |
| SAFFG-10-10-120G | 1 " X14 | 1 " X14 | G3/4 " X14 | 36 | 36 | 51.5 | 30 | 36 | 399 |
| SAFFG-120G | 1.3/16 " X12 | 1.3/16 " X12 | G3/4 " X14 | 37.5 | 37.5 | 51.5 | 30 | 36 | 493 |
| SAFFG-12-12-160G | 1.3/16 " X12 | 1.3/16 " X12 | G1 " X11 | 41 | 41 | 58.5 | 33 | 41 | 664 |
| SAFFG-160G | 1.7/16 " X12 | 1.7/16 " X12 | G1 " X11 | 41.5 | 41.5 | 58.5 | 36 | 41 | 795 |


注: 需配挡圈请在代号后加“DQ”, 如 SAFFG-120GDQ
Note: If you interested to order the adapter with retainer ring please insert suffix “DQ” after our part NO, for example SAFFG-120GDQ

31.5

25

16

SAFOF-OG

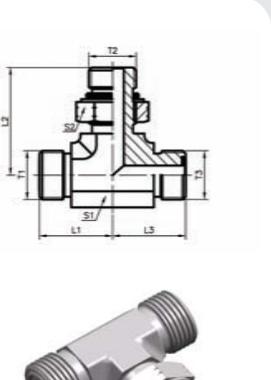

美制ORFS外螺纹O型圈平面密封/美制SAE外螺纹带O型圈重系列ISO 11926-2分支三通
ORFS MALE O-RING/SAE O-RING BOSS S-SERIES ISO 11926-2 BRANCH TEE


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|------------------|---------------|--------------|---------------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | | |
| SAFOF-040G | 9/16 " X18 | 7/16 " X20 | 9/16 " X18 | 23 | 30.3 | 23 | 14 | 17 | 73 |
| SAFOF-04-04-040G | 9/16 " X18 | 9/16 " X18 | 9/16 " X18 | 23 | 32 | 23 | 14 | 19 | 89 |
| SAFOF-060G | 11/16 " X16 | 9/16 " X18 | 11/16 " X16 | 27.5 | 35.5 | 27.5 | 19 | 19 | 121 |
| SAFOF-06-08-060G | 11/16 " X16 | 3/4 " X16 | 11/16 " X16 | 27 | 38 | 27 | 19 | 24 | 155 |
| SAFOF-080G | 13/16 " X16 | 3/4 " X16 | 13/16 " X16 | 31 | 40.5 | 28 | 19 | 24 | 196 |
| SAFOF-08-10-080G | 13/16 " X16 | 7/8 " X14 | 13/16 " X16 | 31 | 45.3 | 31 | 22 | 27 | 226 |
| SAFOF-08-12-080G | 13/16 " X16 | 1.1/16 " X12 | 13/16 " X16 | 34.5 | 54 | 34.5 | 27 | 32 | 310 |
| SAFOF-100G | 1 " X14 | 7/8 " X14 | 1 " X14 | 36.5 | 50.8 | 36.5 | 27 | 27 | 335 |
| SAFOF-10-12-100G | 1 " X14 | 1.1/16 " X12 | 1 " X14 | 36.5 | 52 | 36.5 | 27 | 32 | 386 |
| SAFOF-120G | 1.3/16 " X12 | 1.1/16 " X12 | 1.3/16 " X12 | 40.3 | 55.3 | 40.3 | 30 | 32 | 511 |
| SAFOF-160G | 1.7/16 " X12 | 1.5/16 " X12 | 1.7/16 " X12 | 44.5 | 59.3 | 44.5 | 36 | 41 | 772 |
| SAFOF-200G | 1.11/16 " X12 | 1.5/8 " X12 | 1.11/16 " X12 | 47.5 | 60.5 | 47.5 | 41 | 50 | 1063 |
| SAFOF-240G | 2 " X12 | 1.7/8 " X12 | 2 " X12 | 53.5 | 68.5 | 53.5 | 50 | 55 | 1552 |

40

25

20


SXF

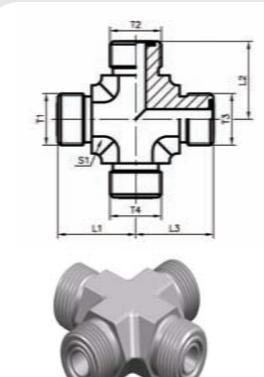

美制ORFS外螺纹O型圈平面密封四通接头
ORFS MALE O-RING/BSP MALE O-RING CROSS FITTINGS


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|------------|------------|---------------|------|------|------|---------|-------------|
| | T1 | T2 | T3 | T4 | L1 | L2 | L3 | | |
| SXF-04 | 9/16 " X18 | 9/16 " X18 | 9/16 " X18 | 9/16 " X18 | 21.5 | 21.5 | 21.5 | 14 | 67 |
| SXF-06 | 11/16 " X16 | 1 | | | | | | | |

S1N



| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | | 重量 (g) | 工作压力 Mpa |
|----------------|----------------|----------------|---------------|------|------|----|-----------|-------------|
| | T1 | T2 | L | L1 | L2 | S1 | | |
| SIN-02 | NPT1/8"X27 | NPT1/8"X27 | 27 | 10.5 | 10.5 | 12 | 15 | 34.5 |
| SIN-02-04 | NPT1/8"X27 | NPT1/4"X18 | 31 | 10.5 | 15 | 17 | 27 | 27.5 |
| SIN-02-06 | NPT1/8"X27 | NPT3/8"X18 | 32 | 10.5 | 16 | 19 | 40 | 21 |
| SIN-04 | NPT1/4"X18 | NPT1/4"X18 | 37 | 15 | 15 | 17 | 31 | 27.5 |
| SIN-04-06 | NPT1/4"X18 | NPT3/8"X18 | 37 | 15 | 16 | 19 | 42 | |
| SIN-04-08 | NPT1/4"X18 | NPT1/2"X14 | 41.5 | 15 | 19.5 | 22 | 70 | |
| SIN-06 | NPT3/8"X18 | NPT3/8"X18 | 38 | 16 | 16 | 19 | 45 | |
| SIN-06-08 | NPT3/8"X18 | NPT1/2"X14 | 43.5 | 16 | 19.5 | 22 | 75 | |
| SIN-06-12 | NPT3/8"X18 | NPT3/4"X14 | 45.5 | 16 | 19.5 | 27 | 122 | 17 |
| SIN-08 | NPT1/2"X14 | NPT1/2"X14 | 48 | 19.5 | 19.5 | 22 | 81 | 21 |
| SIN-08-12 | NPT1/2"X14 | NPT3/4"X14 | 49 | 19.5 | 19.5 | 27 | 125 | 17 |
| SIN-08-16 | NPT1/2"X14 | NPT1"X11.5 | 56 | 19.5 | 25.5 | 36 | 239 | 14 |
| SIN-12 | NPT3/4"X14 | NPT3/4"X14 | 49.8 | 19.5 | 19.5 | 30 | 138 | 17 |
| SIN-12-16 | NPT3/4"X14 | NPT1"X11.5 | 55 | 19.5 | 25.5 | 36 | 225 | |
| SIN-12-20 | NPT3/4"X14 | NPT1.1/4"X11.5 | 59 | 19.5 | 26.5 | 46 | 408 | 8 |
| SIN-16 | NPT1"X11.5 | NPT1"X11.5 | 59.5 | 25.5 | 25.5 | 36 | 222 | 8 |
| SIN-16-20 | NPT1"X11.5 | NPT1.1/4"X11.5 | 64 | 25.5 | 26.5 | 46 | 400 | 8 |
| SIN-16-24 | NPT1"X11.5 | NPT1.1/2"X11.5 | 68 | 25.5 | 27.5 | 50 | 556 | 7 |
| SIN-20 | NPT1.1/4"X11.5 | NPT1.1/4"X11.5 | 63 | 26.5 | 26.5 | 46 | 376 | 8 |
| SIN-20-24 | NPT1.1/4"X11.5 | NPT1.1/2"X11.5 | 69 | 26.5 | 27.5 | 50 | 544 | 7 |
| SIN-24 | NPT1.1/2"X11.5 | NPT1.1/2"X11.5 | 66.5 | 26.5 | 26.5 | 50 | 592 | |
| SIN-24-32 | NPT1.1/2"X11.5 | NPT2"X11.5 | 72 | 26.5 | 27.5 | 65 | 925 | 7 |
| SIN-32 | NPT2"X11.5 | NPT2"X11.5 | 71.5 | 27.5 | 27.5 | 65 | 735 | - |


S1N9



| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|------------------|------------------|---------------|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | | |
| S1N9-02 | NPT1/8 " X27 | NPT1/8 " X27 | 21 | 21 | 11 | 21 | 34.5 |
| S1N9-02-04 | NPT1/8 " X27 | NPT1/4 " X18 | 23.5 | 25.5 | 14 | 31 | 27.5 |
| S1N9-04 | NPT1/4 " X18 | NPT1/4 " X18 | 25.5 | 25.5 | 14 | 39 | |
| S1N9-04-06 | NPT1/4 " X18 | NPT3/8 " X18 | 28 | 31 | 19 | 58 | |
| S1N9-04-08 | NPT1/4 " X18 | NPT1/2 " X14 | 30.5 | 36.7 | 22 | 86 | |
| S1N9-06 | NPT3/8 " X18 | NPT3/8 " X18 | 31 | 31 | 19 | 75 | 21 |
| S1N9-06-08 | NPT3/8 " X18 | NPT1/2 " X14 | 33.8 | 36.7 | 22 | 106 | |
| S1N9-08 | NPT1/2 " X14 | NPT1/2 " X14 | 37.3 | 36.7 | 22 | 130 | |
| S1N9-08-12 | NPT1/2 " X14 | NPT3/4 " X14 | 40 | 44 | 27 | 184 | 17 |
| S1N9-12 | NPT3/4 " X14 | NPT3/4 " X14 | 44 | 44 | 27 | 228 | |
| S1N9-12-16 | NPT3/4 " X14 | NPT1 " X11.5 | 46.5 | 50 | 33 | 311 | 14 |
| S1N9-16 | NPT1 " X11.5 | NPT1 " X11.5 | 50 | 50 | 33 | 382 | |
| S1N9-20 | NPT1.1/4 " X11.5 | NPT1.1/4 " X11.5 | 54 | 54 | 41 | 650 | 8 |
| S1N9-24 | NPT1.1/2 " X11.5 | NPT1.1/2 " X11.5 | 63 | 63 | 48 | 948 | 7 |
| S1N9-32 | NPT2 " X11.5 | NPT2 " X11.5 | 68 | 68 | 63 | 1335 | 5 |

美制


SAN



| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|------------------|------------------|------------------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | | |
| SAN-02 | NPT1/8 " X27 | NPT1/8 " X27 | NPT1/8 " X27 | 21 | 21 | 21 | 11 | 29 | 34.5 |
| SAN-04 | NPT1/4 " X18 | NPT1/4 " X18 | NPT1/4 " X18 | 25.5 | 25.5 | 25.5 | 14 | 53 | 27.5 |
| SAN-06 | NPT3/8 " X18 | NPT3/8 " X18 | NPT3/8 " X18 | 31 | 31 | 31 | 19 | 101 | |
| SAN-08 | NPT1/2 " X14 | NPT1/2 " X14 | NPT1/2 " X14 | 36.7 | 36.7 | 36.7 | 22 | 174 | 21 |
| SAN-12 | NPT3/4 " X14 | NPT3/4 " X14 | NPT3/4 " X14 | 44 | 44 | 44 | 27 | 309 | 17 |
| SAN-16 | NPT1 " X11.5 | NPT1 " X11.5 | NPT1 " X11.5 | 50 | 50 | 50 | 50 | 517 | 14 |
| SAN-20 | NPT1.1/4 " X11.5 | NPT1.1/4 " X11.5 | NPT1.1/4 " X11.5 | 54 | 54 | 54 | 41 | 887 | 8 |
| SAN-24 | NPT1.1/2 " X11.5 | NPT1.1/2 " X11.5 | NPT1.1/2 " X11.5 | 63 | 63 | 63 | 48 | 1210 | 7 |

美制布锥管外螺纹堵头
NPT MALE PLUG


S4N



| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|------------------|------|---------------|----|-----|---------|-------------|
| | T1 | L | L1 | S1 | | | |
| S4N-02 | NPT1/8 " X27 | 16 | 10.5 | 12 | 10 | 34.5 | |
| S4N-04 | NPT1/4 " X18 | 20 | 14.5 | 17 | 20 | 27.5 | |
| S4N-06 | NPT3/8 " X18 | 21 | 14.5 | 19 | 30 | | |
| S4N-08 | NPT1/2 " X14 | 27 | 19.5 | 22 | 56 | 21 | |
| S4N-12 | NPT3/4 " X14 | 29.5 | 19.5 | 27 | 95 | 17 | |
| S4N-16 | NPT1 " X11.5 | 36.5 | 24.5 | 36 | 185 | 14 | |
| S4N-20 | NPT1.1/4 " X11.5 | 38.5 | 25.5 | 46 | 315 | 8 | |
| S4N-24 | NPT1.1/2 " X11.5 | 43 | 26.5 | 50 | 444 | 7 | |
| S4N-32 | NPT2 " X11.5 | 43.5 | 27.5 | 65 | 686 | - | |


美制

S5N

美制布锥管螺纹/布锥管内螺纹
NPT MALE/NPT FEMALE


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|----------------|----------------|---------------|------|----|---------|-------------|
| | T1 | T2 | L | L1 | S1 | | |
| S5N-02 | NPT1/8"X27 | NPT1/8"X27 | 26.4 | 10.5 | 17 | 25 | 34.5 |
| S5N-04-02 | NPT1/4"X18 | NPT1/8"X27 | 22 | 15 | 17 | 36 | 27.5 |
| S5N-04 | NPT1/4"X18 | NPT1/4"X18 | 35.3 | 15 | 19 | 38 | 27.5 |
| S5N-04-06 | NPT1/4"X18 | NPT3/8"X18 | 37 | 15 | 24 | 58 | |
| S5N-06-04 | NPT3/8"X18 | NPT1/4"X18 | 22 | 16 | 19 | 28 | |
| S5N-06 | NPT3/8"X18 | NPT3/8"X18 | 37 | 16 | 24 | 63 | |
| S5N-06-08 | NPT3/8"X18 | NPT1/2"X14 | 43 | 16 | 30 | 112 | |
| S5N-08-06 | NPT1/2"X14 | NPT3/8"X18 | 28.5 | 19.5 | 24 | 54 | |
| S5N-08 | NPT1/2"X14 | NPT1/2"X14 | 47.5 | 19.5 | 30 | 124 | |
| S5N-08-12 | NPT1/2"X14 | NPT3/4"X14 | 49 | 19.5 | 36 | 160 | |
| S5N-12-08 | NPT3/4"X14 | NPT1/2"X14 | 30 | 19.5 | 27 | 72 | 17 |
| S5N-12 | NPT3/4"X14 | NPT3/4"X14 | 49 | 25.5 | 36 | 165 | |
| S5N-16-12 | NPT1"X11.5 | NPT3/4"X14 | 34.5 | 25 | 36 | 139 | 14 |
| S5N-16 | NPT1"X11.5 | NPT1"X11.5 | 60.5 | 25 | 41 | 269 | |
| S5N-16-20 | NPT1"X11.5 | NPT1.1/4"X11.5 | 62.5 | 25.5 | 50 | 351 | |
| S5N-20-16 | NPT1.1/4"X11.5 | NPT1"X11.5 | 37.5 | 25.5 | 46 | 236 | 8 |
| S5N-20 | NPT1.1/4"X11.5 | NPT1.1/4"X11.5 | 63.5 | 25.5 | 50 | 396 | |
| S5N-20-24 | NPT1.1/4"X11.5 | NPT1.1/2"X11.5 | 63.5 | 25.5 | 60 | 559 | |
| S5N 24 20 | NPT1.1/2"X11.5 | NPT1.1/4"X11.5 | 40 | 26.5 | 50 | 311 | |
| S5N-24 | NPT1.1/2"X11.5 | NPT1.1/2"X11.5 | 64.5 | 26.5 | 65 | 727 | |
| S5N-24-32 | NPT1.1/2"X11.5 | NPT2"X11.5 | 67 | 26.5 | 70 | 673 | |
| S5N-32-24 | NPT2"X11.5 | NPT1.1/2"X11.5 | 44.5 | 27.5 | 65 | 605 | |
| S5N-32 | NPT2"X11.5 | NPT2"X11.5 | 67.6 | 27.5 | 70 | 728 | 5 |

S5N9

90° 弯美制布锥管外螺纹/布锥管内螺纹
90° ELBOW NPT MALE/NPT FEMALE


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|----------------|----------------|---------------|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | | |
| S5N9-02 | NPT1/8"X27 | NPT1/8"X27 | 19.8 | 17.8 | 14 | 25 | 34.5 |
| S5N9-04 | NPT1/4"X18 | NPT1/4"X18 | 28 | 22.4 | 19 | 40 | 27.5 |
| S5N9-04-06 | NPT1/4"X18 | NPT3/8"X18 | 31 | 25 | 22 | 60 | |
| S5N9-06 | NPT3/8"X18 | NPT3/8"X18 | 33.5 | 25 | 22 | 74 | 21 |
| S5N9-08 | NPT1/2"X14 | NPT1/2"X14 | 41.2 | 31.2 | 27 | 138 | |
| S5N9-12-08 | NPT3/4"X14 | NPT1/2"X14 | 45 | 31.2 | 27 | 176 | 17 |
| S5N9-12 | NPT3/4"X14 | NPT3/4"X14 | 45.2 | 34.5 | 33 | 174 | |
| S5N9-16 | NPT1"X11.5 | NPT1"X11.5 | 54.5 | 41.1 | 41 | 310 | 14 |
| S5N9-20 | NPT1.1/4"X11.5 | NPT1.1/4"X11.5 | 63 | 43.2 | 48 | 458 | 8 |
| S5N9-24 | NPT1.1/2"X11.5 | NPT1.1/2"X11.5 | 71.5 | 52.8 | 63 | 935 | 7 |
| S5N9-32 | NPT2"X11.5 | NPT2"X11.5 | 73.5 | 62 | 70 | 840 | 5 |

S7N


美制布锥管内螺纹
NPT FEMALE

| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|-----------------|-----------------|---------------|----|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | | |
| S7N-02 | NPT1/8" X27 | NPT1/8" X27 | 19 | | 17 | 28 | 34.5 |
| S7N-02-04 | NPT1/8" X27 | NPT1/4" X18 | 27 | | 19 | 38 | 27.5 |
| S7N-02-06 | NPT1/8" X27 | NPT3/8" X18 | 30 | | 22 | 55 | |
| S7N-04 | NPT1/4" X18 | NPT1/4" X18 | 29 | | 19 | 33 | |
| S7N-04-06 | NPT1/4" X18 | NPT3/8" X18 | 31 | | 22 | 49 | |
| S7N-04-08 | NPT1/4" X18 | NPT1/2" X14 | 35 | | 30 | 129 | |
| S7N-06 | NPT3/8" X18 | NPT3/8" X18 | 29 | | 22 | 37 | |
| S7N-06-08 | NPT3/8" X18 | NPT1/2" X14 | 38 | | 30 | 128 | |
| S7N-06-12 | NPT3/8" X18 | NPT3/4" X14 | 40 | | 36 | 201 | 17 |
| S7N-08 | NPT1/2" X14 | NPT1/2" X14 | 38 | | 30 | 110 | 21 |
| S7N-08-12 | NPT1/2" X14 | NPT3/4" X14 | 43 | | 36 | 197 | 17 |
| S7N-12 | NPT3/4" X14 | NPT3/4" X14 | 39 | | 36 | 148 | |
| S7N-12-16 | NPT3/4" X14 | NPT1" X11.5 | 45.5 | | 41 | 227 | 14 |
| S7N-16 | NPT1" X11.5 | NPT1" X11.5 | 48 | | 41 | 183 | |
| S7N-20 | NPT1.1/4" X11.5 | NPT1.1/4" X11.5 | 49 | | 50 | 239 | 8 |
| S7N-24 | NPT1.1/2" X11.5 | NPT1.1/2" X11.5 | 49 | | 60 | 409 | 7 |
| S7N-32 | NPT2" X11.5 | NPT2" X11.5 | 50 | | 70 | 422 | - |

S7N9

90° 弯美制布锥管内螺纹
90° NPT FEMALE


| 代号 PART NO. | 螺纹 THREAD | | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|-----------------|-----------------|---------------|------|----|---------|-------------|
| | T1 | T2 | L1 | L2 | S1 | | |
| S7N9-02 | NPT1/8" X27 | NPT1/8" X27 | 20 | 20 | 16 | 38 | 34.5 |
| S7N9-04 | NPT1/4" X18 | NPT1/4" X18 | 22.5 | 22.5 | 19 | 51 | |
| S7N9-06 | NPT3/8" X18 | NPT3/8" X18 | 26 | 26 | 24 | 96 | |
| S7N9-08 | NPT1/2" X14 | NPT1/2" X14 | 31 | 31 | 27 | 114 | |
| S7N9-12 | NPT3/4" X14 | NPT3/4" X14 | 34 | 34 | 33 | 173 | 17 |
| S7N9-16 | NPT1" X11.5 | NPT1" X11.5 | 42 | 42 | 41 | 320 | 14 |
| S7N9-20 | NPT1.1/4" X11.5 | NPT1.1/4" X11.5 | 48 | 48 | 50 | 469 | 8 |
| S7N9-24 | NPT1.1/2" X11.5 | NPT1.1/2" X11.5 | 53 | 53 | 60 | 885 | 7 |
| S7N9-32 | NPT2" X11.5 | NPT2" X11.5 | 62 | 62 | 70 | 1048 | - |

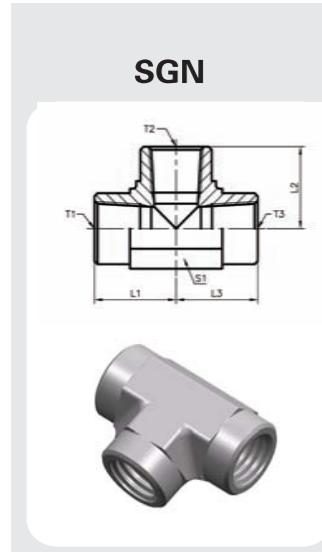


| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 g | 工作压力 Mpa |
|----------------|-----------------|-----------------|-----------------|---------------|------|------|----|---------|-------------|
| | T1 | T2 | T3 | L1 | L2 | L3 | S1 | | |
| SGN-02 | NPT1/8" X27 | NPT1/8" X27 | NPT1/8" X27 | 20 | 20 | 20 | | 48 | 34.5 |
| SGN-04 | NPT1/4" X18 | NPT1/4" X18 | NPT1/4" X18 | 22.5 | 22.5 | 22.5 | | 61 | |
| SGN-06 | NPT3/8" X18 | NPT3/8" X18 | NPT3/8" X18 | 26 | 26 | 26 | | 112 | 21 |
| SGN-08 | NPT1/2" X14 | NPT1/2" X14 | NPT1/2" X14 | 31 | 31 | 31 | | 133 | |
| SGN-12 | NPT3/4" X14 | NPT3/4" X14 | NPT3/4" X14 | 34 | 34 | 34 | | 194 | 17 |
| SGN-16 | NPT1" X11.5 | NPT1" X11.5 | NPT1" X11.5 | 42 | 42 | 42 | | 365 | 14 |
| SGN-20 | NPT1.1/4" X11.5 | NPT1.1/4" X11.5 | NPT1.1/4" X11.5 | 48 | 48 | 48 | | 530 | 8 |
| SGN-24 | NPT1.1/2" X11.5 | NPT1.1/2" X11.5 | NPT1.1/2" X11.5 | 53 | 53 | 53 | | 1027 | 7 |
| SGN-32 | NPT2" X11.5 | NPT2" X11.5 | NPT2" X11.5 | 62 | 62 | 62 | | 1202 | - |





| 代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | | 重量 g | 工作压力 Mpa |
|----------------|-------------|---------------|----|------|---------|-------------|
| | | T1 | L1 | L | S1 | |
| S4O-04 | 7/16" X20 | 9.14 | | 17 | 14 | 16 |
| S4O-05 | 1/2" X20 | 9.14 | | 17 | 17 | 23 |
| S4O-06 | 9/16" X18 | 9.93 | | 18.5 | 17 | 26 |
| S4O-08 | 3/4" X16 | 11.13 | | 20.5 | 22 | 50 |
| S4O-10 | 7/8" X14 | 12.7 | | 23.6 | 27 | 81 |
| S4O-12 | 1.1/16" X12 | 15.1 | | 27.7 | 32 | 135 |
| S4O-14 | 1.3/16" X12 | 15.1 | | 27.7 | 36 | 165 |
| S4O-16 | 1.5/16" X12 | 15.1 | | 28.5 | 41 | 198 |
| S4O-20 | 1.5/8" X12 | 15.1 | | 30.5 | 50 | 357 |
| S4O-24 | 1.7/8" X12 | 15.1 | | 30 | 55 | 423 |
| S4O-32 | 2.1/2" X12 | 15.1 | | 36.3 | 70 | 910 |
| | | | | | | 12.5 |

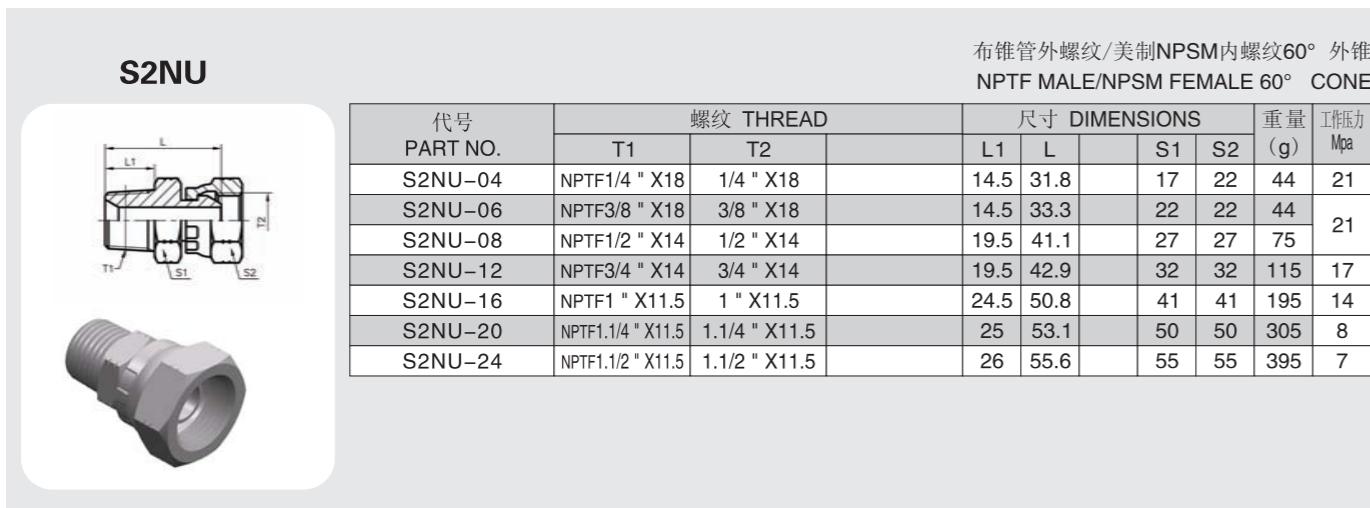



| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 (g) | 工作压力 Mpa |
|----------------|------------------|--------------|--|---------------|------|----|----|-----------|-------------|
| | T1 | T2 | | L1 | L | S1 | S2 | | |
| S2NU-04 | NPTF1/4" X18 | 1/4" X18 | | 14.5 | 31.8 | | 17 | 22 | 44 |
| S2NU-06 | NPTF3/8" X18 | 3/8" X18 | | 14.5 | 33.3 | | 22 | 22 | 44 |
| S2NU-08 | NPTF1/2" X14 | 1/2" X14 | | 19.5 | 41.1 | | 27 | 27 | 75 |
| S2NU-12 | NPTF3/4" X14 | 3/4" X14 | | 19.5 | 42.9 | | 32 | 32 | 115 |
| S2NU-16 | NPTF1" X11.5 | 1" X11.5 | | 24.5 | 50.8 | | 41 | 41 | 195 |
| S2NU-20 | NPTF1.1/4" X11.5 | 1.1/4" X11.5 | | 25 | 53.1 | | 50 | 50 | 305 |
| S2NU-24 | NPTF1.1/2" X11.5 | 1.1/2" X11.5 | | 26 | 55.6 | | 55 | 55 | 395 |
| | | | | | | | | | 7 |

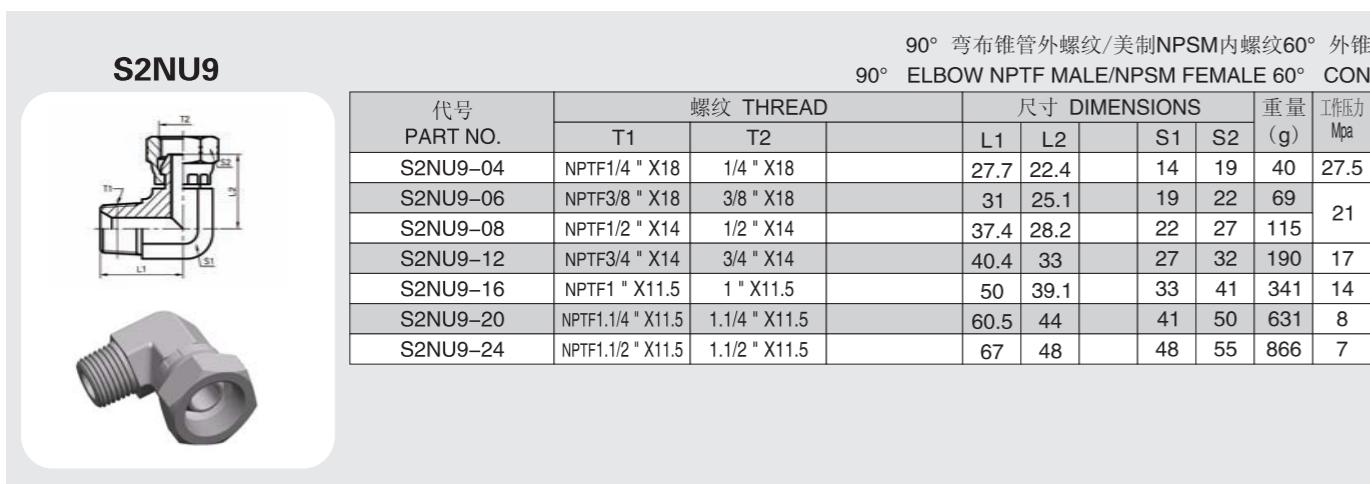



| 代号 PART NO. | 螺纹 THREAD | | | 尺寸 DIMENSIONS | | | | 重量 (g) | 工作压力 Mpa |
|----------------|------------------|--------------|--|---------------|------|----|----|-----------|-------------|
| | T1 | T2 | | L1 | L2 | S1 | S2 | | |
| S2NU9-04 | NPTF1/4" X18 | 1/4" X18 | | 27.7 | 22.4 | | 14 | 19 | 40 |
| S2NU9-06 | NPTF3/8" X18 | 3/8" X18 | | 31 | 25.1 | | 19 | 22 | 69 |
| S2NU9-08 | NPTF1/2" X14 | 1/2" X14 | | 37.4 | 28.2 | | 22 | 27 | 115 |
| S2NU9-12 | NPTF3/4" X14 | 3/4" X14 | | 40.4 | 33 | | 27 | 32 | 190 |
| S2NU9-16 | NPTF1" X11.5 | 1" X11.5 | | 50 | 39.1 | | 33 | 41 | 341 |
| S2NU9-20 | NPTF1.1/4" X11.5 | 1.1/4" X11.5 | | 60.5 | 44 | | 41 | 50 | 631 |
| S2NU9-24 | NPTF1.1/2" X11.5 | 1.1/2" X11.5 | | 67 | 48 | | 48 | 55 | 866 |
| | | | | | | | | | 7 |

S1FLW
S1FSWS1FLW-ZH
S1FSW-ZH轻/重系列法兰ISO 6162焊接管
L/S-SERIES FLANGE ISO 6162 BUTT-WELD TUBE

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | | | | 螺栓 BOLT | 工作压力 Mpa |
|--------------------|---------------------|---------------|----|-------|------|-------|-------|------------|-------------|
| | | D1 | L1 | L2 | L3 | D | K | | |
| 3000PSI | | | | | | | | | |
| S1FLW-08-20X3.0 | 1/2 " | 20 | 30 | 6.73 | 3.0 | 30.1 | FL-08 | M8X25 | |
| S1FLW-08-21.3X2.6 | 1/2 " | 21.3 | 30 | 6.73 | 2.6 | 30.1 | FL-08 | M8X25 | |
| S1FLW-08-22X2.0 | 1/2 " | 22 | 30 | 6.73 | 2.0 | 30.1 | FL-08 | M8X25 | |
| S1FLW-12-22X2.0 | 3/4 " | 22 | 35 | 6.73 | 2.0 | 38.1 | FL-12 | M10X30 | |
| S1FLW-12-25X3.0 | 3/4 " | 25 | 35 | 6.73 | 3.0 | 38.1 | FL-12 | M10X30 | |
| S1FLW-12-26.9X3.6 | 3/4 " | 26.9 | 35 | 6.73 | 3.6 | 38.1 | FL-12 | M10X30 | |
| S1FLW-16-30X4.0 | 1 " | 30 | 40 | 8 | 4.0 | 44.4 | FL-16 | M10X30 | |
| S1FLW-16-33.7X3.2 | 1 " | 33.7 | 40 | 8 | 3.2 | 44.4 | FL-16 | M10X30 | |
| S1FLW-16-35X4.0 | 1 " | 35 | 40 | 8 | 4.0 | 44.4 | FL-16 | M10X30 | |
| S1FLW-20-38X4.0 | 1.1/4 " | 38 | 45 | 8 | 4.0 | 50.8 | FL-20 | M10X35 | |
| S1FLW-20-42X3.0 | 1.1/4 " | 42 | 45 | 8 | 3.0 | 50.8 | FL-20 | M10X35 | |
| S1FLW-20-42.3X3.2 | 1.1/4 " | 42.3 | 45 | 8 | 3.2 | 50.8 | FL-20 | M10X35 | |
| S1FLW-24-38X4.0 | 1.1/2 " | 38 | 50 | 8 | 4.0 | 60.3 | FL-24 | M12X35 | |
| S1FLW-24-42X3.0 | 1.1/2 " | 42 | 50 | 8 | 3.0 | 60.3 | FL-24 | M12X35 | |
| S1FLW-24-48.3X4.5 | 1.1/2 " | 48.3 | 50 | 8 | 4.5 | 60.3 | FL-24 | M12X35 | |
| S1FLW-32-42.3X3.2 | 2 " | 42.3 | 60 | 9.53 | 3.2 | 71 | FL-32 | M12X35 | |
| S1FLW-32-48.3X3.2 | 2 " | 48.3 | 60 | 9.53 | 3.2 | 71 | FL-32 | M12X35 | |
| S1FLW-32-60.3X5.6 | 2 " | 60.3 | 60 | 9.53 | 5.6 | 71 | FL-32 | M12X35 | |
| S1FLW-48-76.1X3.6 | 3 " | 76.1 | 70 | 9.53 | 3.6 | 101.6 | FL-48 | M16X45 | |
| S1FLW-48-76.1X7.1 | 3 " | 76.1 | 70 | 9.53 | 7.1 | 101.6 | FL-48 | M16X45 | |
| S1FLW-48-88.9X3.6 | 3 " | 88.9 | 70 | 9.53 | 3.6 | 101.6 | FL-48 | M16X45 | |
| S1FLW-56-76.1X3.6 | 3.1/2 " | 76.1 | 80 | 11.23 | 3.6 | 114.3 | FL-56 | M16X50 | |
| S1FLW-56-88.9X3.6 | 3.1/2 " | 88.9 | 80 | 11.23 | 3.6 | 114.3 | FL-56 | M16X50 | |
| 6000PSI | | | | | | | | | |
| S1FSW-08-16X2.5 | 1/2 " | 16 | 40 | 7.75 | 2.5 | 31.7 | FS-08 | M8X30 | |
| S1FSW-08-20X3.0 | 1/2 " | 20 | 40 | 7.75 | 3.0 | 31.7 | FS-08 | M8X30 | |
| S1FSW-08-21.3X4.5 | 1/2 " | 21.3 | 40 | 7.75 | 4.5 | 31.7 | FS-08 | M8X30 | |
| S1FSW-12-20X3.0 | 3/4 " | 20 | 45 | 8.76 | 3.0 | 41.3 | FS-12 | M10X35 | |
| S1FSW-12-26X4.0 | 3/4 " | 26 | 45 | 8.76 | 4.0 | 41.3 | FS-12 | M10X35 | |
| S1FSW-12-26.9X5.6 | 3/4 " | 26.9 | 45 | 8.76 | 5.6 | 41.3 | FS-12 | M10X35 | |
| S1FSW-16-25X4.0 | 1 " | 25 | 50 | 9.53 | 4.0 | 47.6 | FS-16 | M12X45 | |
| S1FSW-16-30X4.0 | 1 " | 30 | 50 | 9.53 | 4.0 | 47.6 | FS-16 | M12X45 | |
| S1FSW-16-33.7X7.1 | 1 " | 33.7 | 50 | 9.53 | 7.1 | 47.6 | FS-16 | M12X45 | |
| S1FSW-20-30X4.0 | 1.1/4 " | 30 | 55 | 10.29 | 4.0 | 54 | FS-20 | M14X50 | |
| S1FSW-20-38X5.0 | 1.1/4 " | 38 | 55 | 10.29 | 5.0 | 54 | FS-20 | M14X50 | |
| S1FSW-20-42.4X8.8 | 1.1/4 " | 42.4 | 55 | 10.29 | 8.8 | 54 | FS-20 | M14X50 | |
| S1FSW-24-38X5.0 | 1.1/2 " | 38 | 60 | 12.57 | 5.0 | 63.5 | FS-24 | M16X55 | |
| S1FSW-24-48.3X8.0 | 1.1/2 " | 48.3 | 60 | 12.57 | 8.0 | 63.5 | FS-24 | M16X55 | |
| S1FSW-24-48.3X8.8 | 1.1/2 " | 48.3 | 60 | 12.57 | 8.8 | 63.5 | FS-24 | M16X55 | |
| S1FSW-32-60.3X10.0 | 2 " | 60.3 | 70 | 12.57 | 10.0 | 79.4 | FS-32 | M20X70 | |
| S1FSW-32-60.3X12.5 | 2 " | 60.3 | 70 | 12.57 | 12.5 | 79.4 | FS-32 | M20X70 | |



S1FLW-PM
S1FSW-PMS1FLW-PM/ZH
S1FSW-PM/ZH轻/重系列法兰ISO 6162焊接管
L/S-SERIES FLANGE ISO 6162 BUTT-WELD TUBE

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | | | | 螺栓 BOLT | 工作压力 Mpa |
|---------------------|---------------------|---------------|----|------|-----|------|-------|------------|-------------|
| | | D1 | L1 | L2 | L3 | D | K | | |
| 3000PSI | | | | | | | | | |
| S1FLW-08-20X3.0PM | | 20 | 30 | 6.73 | 3.0 | 30.1 | FL-08 | M8X25 | |
| S1FLW-08-21.3X2.6PM | | 21.3 | 30 | 6.73 | 2.6 | 30.1 | FL-08 | M8X25 | |
| S1FLW-08-22X2.0PM | | 22 | 30 | 6.73 | 2.0 | 30.1 | FL-08 | M8X25 | |
| S1FLW-12-22X2.0PM | | 22 | 35 | 6.73 | 2.0 | 38.1 | FL-12 | M10X30 | |
| S1FLW-12-25X3.0PM | | 25 | 35 | 6.73 | 3.0 | 38.1 | FL-12 | M10X30 | |
| S1FLW-12-26.9X3.6PM | | 26.9 | 35 | 6.73 | 3.6 | 38.1 | FL-12 | M10X30 | |
| S1FLW-16-30X4.0PM | | 30 | 40 | 8 | 4.0 | 44.4 | FL-16 | M10X30 | |
| S1FLW-16-33.7X3.2PM | | 33.7 | 40 | 8 | 3.2 | 44.4 | FL-16 | M10X30 | |
| S1FLW-16-35X4.0PM | | 35 | 40 | 8 | 4.0 | 44.4 | FL-16 | M10X30 | |
| S1FLW-20-38X4.0PM | | 38 | 45 | 8 | 4.0 | 50.8 | FL-20 | M10X35 | |
| S1FLW-20-42X3.0PM | | 42 | 45 | 8 | 3.0 | 50.8 | FL-20 | M10X35 | |
| S1FLW-20-42.3X3.2PM | | 42.3 | 45 | 8 | 3.2 | 50.8 | FL-20 | M10X35 | |
| S1FLW-24-38X4.0PM | | 38 | 50 | 8 | 4.0 | 60.3 | FL-24 | M12X35 | |
| S1FLW-24-42X3.0PM | | 42 | 50 | 8 | 3.0 | 60.3 | FL-24 | M12X35 | |
| S1FLW-24-48.3X4.5PM | | 48.3 | 50 | 8 | 4.5 | 60.3 | FL-24 | M12X35 | |
| S1FLW-32-42.3X3.2PM | | 42.3 | 60 | 9.53 | 3.2 | 71 | FL-32 | M12X35 | |
| S1FLW-32-48.3X3.2PM | | 48.3 | 60 | 9.53 | 3.2 | 71 | FL-32 | M12X35 | |
| S1FLW-32-60.3X5.6PM | | 60.3 | 60 | 9.53 | 5.6 | 71 | FL-32 | M12X35 | |
| S1FLW-48-76.1X3.6PM | | 76.1 | 70 | 9.53 | 3.6 | 101 | | | |

S1FLW9-W
S1FSW9-W90° 弯 SAE 法兰/焊接管
90° ELBOW SAE FLANGE/WELD TUDE

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | | | | | | | | 工作压力 Mpa |
|----------------|---------------------|---------------|------|----|------|-----|----|----|----|------|----|-------------|
| | | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | D1 | D | |
| 3000PSI | | | | | | | | | | | | |
| S1FLW9-08-20W | 1/2 " | 17.5 | 38.1 | 46 | 54 | 60 | 16 | 20 | 37 | 9 | 20 | 25 |
| S1FLW9-08-22W | 1/2 " | 17.5 | 38.1 | 46 | 54 | 60 | 16 | 20 | 37 | 9 | 22 | 16 |
| S1FLW9-08-25W | 1/2 " | 17.5 | 38.1 | 46 | 54 | 60 | 16 | 20 | 37 | 9 | 25 | 25 |
| S1FLW9-08-28W | 1/2 " | 17.5 | 38.1 | 46 | 54 | 60 | 16 | 20 | 37 | 9 | 28 | 16 |
| S1FLW9-12-25W | 3/4 " | 22.2 | 47.6 | 50 | 65 | 63 | 19 | 24 | 38 | 11 | 25 | 25 |
| S1FLW9-12-28W | 3/4 " | 22.2 | 47.6 | 50 | 65 | 63 | 19 | 24 | 38 | 11 | 28 | 16 |
| S1FLW9-12-30W | 3/4 " | 22.2 | 47.6 | 50 | 65 | 63 | 19 | 24 | 38 | 11 | 30 | 25 |
| S1FLW9-12-35W | 3/4 " | 22.2 | 47.6 | 50 | 65 | 63 | 19 | 24 | 38 | 11 | 35 | 16 |
| S1FLW9-16-30W | 1 " | 26.2 | 52.4 | 55 | 70 | 70 | 19 | 28 | 43 | 11 | 30 | 25 |
| S1FLW9-16-35W | 1 " | 26.2 | 52.4 | 55 | 70 | 70 | 19 | 28 | 43 | 11 | 35 | 16 |
| S1FLW9-16-38W | 1 " | 26.2 | 52.4 | 55 | 70 | 70 | 19 | 28 | 43 | 11 | 38 | 25 |
| S1FLW9-16-42W | 1 " | 26.2 | 52.4 | 55 | 70 | 70 | 19 | 28 | 43 | 11 | 42 | 16 |
| S1FLW9-20-38W | 1.1/4 " | 30.2 | 58.7 | 68 | 79 | 85 | 22 | 34 | 51 | 11 | 38 | 25 |
| S1FLW9-20-42W | 1.1/4 " | 30.2 | 58.7 | 68 | 79 | 85 | 22 | 34 | 51 | 11 | 42 | 16 |
| S1FLW9-20-49W | 1.1/4 " | 30.2 | 58.7 | 68 | 79 | 85 | 22 | 34 | 51 | 11 | 49 | |
| S1FLW9-24-38W | 1.1/2 " | 35.7 | 69.9 | 78 | 93 | 95 | 25 | 38 | 55 | 13.5 | 38 | |
| S1FLW9-24-42W | 1.1/2 " | 35.7 | 69.9 | 78 | 93 | 95 | 25 | 38 | 55 | 13.5 | 42 | |
| S1FLW9-24-49W | 1.1/2 " | 35.7 | 69.9 | 78 | 93 | 95 | 25 | 38 | 55 | 13.5 | 49 | |
| 6000PSI | | | | | | | | | | | | |
| S1FSW9-08-20W | 1/2 " | 18.2 | 40.5 | 46 | 54 | 60 | 16 | 20 | 37 | 9 | 20 | 31.5 |
| S1FSW9-08-25W | 1/2 " | 18.2 | 40.5 | 46 | 71 | 60 | 16 | 20 | 37 | 9 | 25 | |
| S1FSW9-12-25W | 3/4 " | 23.8 | 50.8 | 55 | 71.3 | 70 | 18 | 28 | 43 | 11 | 25 | |
| S1FSW9-12-30W | 3/4 " | 23.8 | 50.8 | 55 | 71.3 | 70 | 18 | 28 | 43 | 11 | 30 | |
| S1FSW9-16-30W | 1 " | 27.8 | 57.2 | 65 | 81 | 85 | 22 | 34 | 51 | 13 | 30 | |
| S1FSW9-16-38W | 1 " | 27.8 | 57.2 | 65 | 81 | 85 | 22 | 34 | 51 | 13 | 38 | |
| S1FSW9-20-38W | 1.1/4 " | 31.8 | 66.6 | 78 | 95.2 | 95 | 25 | 38 | 56 | 15 | 38 | |
| S1FSW9-20-49W | 1.1/4 " | 31.8 | 66.6 | 78 | 95.2 | 95 | 25 | 38 | 56 | 15 | 49 | |
| S1FSW9-24-38W | 1.1/2 " | 36.5 | 79.3 | 94 | 112 | 110 | 25 | 42 | 65 | 17 | 38 | |
| S1FSW9-24-49W | 1.1/2 " | 36.5 | 79.3 | 94 | 112 | 110 | 25 | 42 | 65 | 17 | 49 | |
| S1FSW9-24-61W | 1.1/2 " | 36.5 | 79.3 | 94 | 112 | 110 | 25 | 42 | 65 | 17 | 61 | |

5FLW9-W

90° 弯承插焊法兰接头
90° ELBOW SOCKET WELD FLANGE

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 管子外径 D TUDE O.D. | 尺寸 DIMENSIONS | | | | | | | | | | 螺栓 BOLT | 工作压力 Mpa |
|----------------|---------------------|---------------------|---------------|------|----|----|----|----|----|----|------|--|------------|-------------|
| | | | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | D1 | | | |
| 3000PSI | | | | | | | | | | | | | | |
| S5FLW9-08-18W | 1/2 " | 18 | 17.5 | 38.1 | 46 | 54 | 10 | 16 | 18 | 37 | 9 | | M8X30 | |
| S5FLW9-08-20W | 1/2 " | 20 | 17.5 | 38.1 | 46 | 54 | 10 | 16 | 18 | 37 | 9 | | M8X30 | |
| S5FLW9-12-20W | 3/4 " | 20 | 22.2 | 47.6 | 52 | 65 | 10 | 19 | 22 | 38 | 11 | | M10X35 | |
| S5FLW9-12-22W | 3/4 " | 22 | 22.2 | 47.6 | 52 | 65 | 10 | 19 | 22 | 38 | 11 | | M10X35 | |
| S5FLW9-12-25W | 3/4 " | 25 | 22.2 | 47.6 | 52 | 65 | 10 | 19 | 22 | 38 | 11 | | M10X35 | 34.5 |
| S5FLW9-16-25W | 1 " | 25 | 26.2 | 52.4 | 59 | 70 | 12 | 19 | 28 | 43 | 11 | | M10X35 | |
| S5FLW9-16-28W | 1 " | 28 | 26.2 | 52.4 | 59 | 70 | 12 | 19 | 28 | 43 | 11 | | M10X35 | |
| S5FLW9-16-30W | 1 " | 30 | 26.2 | 52.4 | 59 | 70 | 12 | 19 | 28 | 43 | 11 | | M10X35 | |
| S5FLW9-16-32W | 1 " | 32 | 26.2 | 52.4 | 59 | 70 | 12 | 19 | 28 | 43 | 11 | | M10X35 | |
| S5FLW9-20-32W | 1.1/4 " | 32 | 30.2 | 58.7 | 73 | 79 | 14 | 22 | 30 | 51 | 11 | | M10X40 | |
| S5FLW9-20-35W | 1.1/4 " | 35 | 30.2 | 58.7 | 73 | 79 | 14 | 22 | 30 | 51 | 11 | | M10X40 | 27.6 |
| S5FLW9-20-38W | 1.1/4 " | 38 | 30.2 | 58.7 | 73 | 79 | 14 | 22 | 30 | 51 | 11 | | M10X40 | |
| S5FLW9-20-42W | 1.1/4 " | 42 | 30.2 | 58.7 | 73 | 79 | 14 | 22 | 30 | 51 | 11 | | M10X40 | |
| S5FLW9-24-42W | 1.1/2 " | 42 | 35.7 | 69.9 | 83 | 94 | 16 | 25 | 36 | 56 | 13.5 | | M12X45 | |
| S5FLW9-24-45W | 1.1/2 " | 45 | 35.7 | 69.9 | 83 | 94 | 16 | 25 | 36 | 56 | 13.5 | | M12X45 | |
| S5FLW9-24-48W | 1.1/2 " | 48 | 35.7 | 69.9 | 83 | 94 | 16 | 25 | 36 | 56 | 13.5 | | M12X45 | |
| S5FLW9-24-50W | 1.1/2 " | 50 | 35.7 | 69.9 | 83 | 94 | 16 | 25 | 36 | | | | | |

SFL

SAE对开法兰夹3000PSI
SAE SPLIT FLANGE CLAMPS 3000PSI
ISO 6162-1—SAE J518

A类

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | | 可配螺栓 BOLT | 工作压力 Mpa |
|----------------|---------------------|---------------|-----|--------|-------|--------------------|-------------|
| | | A | B | C | E | | |
| SFL-08 | 1/2 " | 54 | 46 | 38.1 | 17.48 | M8X25 | 34.5 |
| SFL-08UN | 1/2 " | 54 | 46 | 38.1 | 17.48 | 5/16 " -18X1.1/4 " | |
| SFL-12 | 3/4 " | 65 | 52 | 47.63 | 22.23 | M10X30 | |
| SFL-12UN | 3/4 " | 65 | 52 | 47.63 | 22.23 | 3/8 " -16X1.1/4 " | |
| SFL-16 | 1 " | 70 | 59 | 52.37 | 26.19 | M10X30 | |
| SFL-16UN | 1 " | 70 | 59 | 52.37 | 26.19 | 3/8 " -16X1.1/4 " | |
| SFL-20 | 1.1/4 " | 79 | 73 | 58.72 | 30.18 | M10X30 | 27.6 |
| SFL-20UN | 1.1/4 " | 79 | 73 | 58.72 | 30.18 | 7/16 " -14X1.1/2 " | |
| SFL-24 | 1.1/2 " | 94 | 83 | 69.85 | 35.71 | M12X35 | |
| SFL-24UN | 1.1/2 " | 94 | 83 | 69.85 | 35.71 | 1/2 " -13X1.1/2 " | |
| SFL-32 | 2 " | 102 | 97 | 77.77 | 42.88 | M12X35 | 20.7 |
| SFL-32UN | 2 " | 102 | 97 | 77.77 | 42.88 | 1/2 " -13X1.1/2 " | |
| SFL-40 | 2.1/2 " | 114 | 109 | 88.9 | 50.8 | M12X40 | |
| SFL-40UN | 2.1/2 " | 114 | 109 | 88.9 | 50.8 | 1/2 " -13X1.3/4 " | |
| SFL-48 | 3 " | 135 | 131 | 106.38 | 61.93 | M16X45 | 13.8 |
| SFL-48UN | 3 " | 135 | 131 | 106.38 | 61.93 | 5/8 " -11X1.3/4 " | |
| SFL-56 | 3.1/2 " | 152 | 140 | 120.65 | 69.85 | M16X50 | |
| SFL-56UN | 3.1/2 " | 152 | 140 | 120.65 | 69.85 | 5/8 " -11X2 " | |
| SFL-64 | 4 " | 162 | 152 | 130.18 | 77.77 | M16X50 | 3.4 |
| SFL-64UN | 4 " | 162 | 152 | 130.18 | 77.77 | 5/8 " -11X2 " | |

注:螺栓需另订
Note: Bolt should be ordered another.

SFS

SAE对开法兰夹6000PSI
SAE SPLIT FLANGE CLAMPS 6000PSI
ISO 6162-2—SAE J518

A类

| 代号 PART NO. | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | | 可配螺栓 BOLT | 工作压力 Mpa |
|----------------|---------------------|---------------|-------|------|------|--------------------|-------------|
| | | A | B | C | E | | |
| SFS-08 | 1/2 " | 56.4 | 47.2 | 40.5 | 18.2 | M8X30 | 42 |
| SFS-08UN | 1/2 " | 56.4 | 47.2 | 40.5 | 18.2 | 5/16 " -18X1.1/2 " | |
| SFS-12 | 3/4 " | 71.4 | 60 | 50.8 | 23.8 | M10X35 | |
| SFS-12UN | 3/4 " | 71.4 | 60 | 50.8 | 23.8 | 3/8 " -16X1.1/2 " | |
| SFS-16 | 1 " | 81.2 | 69.6 | 57.2 | 27.8 | M12X45 | |
| SFS-16UN | 1 " | 81.2 | 69.6 | 57.2 | 27.8 | 7/16 " -14X1.3/4 " | |
| SFS-20 | 1.1/4 " | 95.2 | 77.2 | 66.7 | 31.8 | M12X45 | |
| SFS-20UN | 1.1/4 " | 95.2 | 77.2 | 66.7 | 31.8 | 1/2 " -13X1.3/4 " | |
| SFS-24 | 1.1/2 " | 112.8 | 95.4 | 79.4 | 36.6 | M16X55 | |
| SFS-24UN | 1.1/2 " | 112.8 | 95 | 79.4 | 36.6 | 5/8 " -11X2.1/4 " | |
| SFS-32 | 2 " | 133.4 | 113.8 | 96.8 | 44.4 | M20X70 | |
| SFS-32UN | 2 " | 133.4 | 113.8 | 96.8 | 44.4 | 3/4 " -10X2.3/4 " | |


注:螺栓需另订
Note: Bolt should be ordered another.

焊接法兰

焊接法兰

SFL-W

SAE 整体法兰夹3000PSI
SAE WHOLE FLANGE CLAMPS 3000PSI
ISO 6162-1—SAE J518




| 代号 PART NO. | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | | 可配螺栓 BOLT | 工作压力 Mpa |
|----------------|---------------------|---------------|-----|--------|-------|-------------------|-------------|
| | | A | B | C | E | | |
| SFL-08W | 1/2 " | 54 | 46 | 38.1 | 17.48 | M8X25 | 34.5 |
| SFL-08WUN | 1/2 " | 54 | 46 | 38.1 | 17.48 | 5/16 "-18X1.1/4 " | |
| SFL-12W | 3/4 " | 65 | 52 | 47.63 | 22.23 | M10X30 | |
| SFL-12WUN | 3/4 " | 65 | 52 | 47.63 | 22.23 | 3/8 "-16X1.1/4 " | |
| SFL-16W | 1 " | 70 | 59 | 52.37 | 26.19 | M10X30 | |
| SFL-16WUN | 1 " | 70 | 59 | 52.37 | 26.19 | 3/8 "-16X1.1/4 " | |
| SFL-20W | 1.1/4 " | 79 | 73 | 58.72 | 30.18 | M10X30 | |
| SFL-20WUN | 1.1/4 " | 79 | 73 | 58.72 | 30.18 | 7/16 "-14X1.1/2 " | |
| SFL-24W | 1.1/2 " | 94 | 83 | 69.85 | 35.71 | M12X35 | 20.7 |
| SFL-24WUN | 1.1/2 " | 94 | 83 | 69.85 | 35.71 | 1/2 "-13X1.1/2 " | |
| SFL-32W | 2 " | 102 | 97 | 77.77 | 42.88 | M12X35 | |
| SFL-32WUN | 2 " | 102 | 97 | 77.77 | 42.88 | 1/2 "-13X1.1/2 " | |
| SFL-40W | 2.1/2 " | 114 | 109 | 88.9 | 50.8 | M12X40 | 17.2 |
| SFL-40WUN | 2.1/2 " | 114 | 109 | 88.9 | 50.8 | 1/2 "-13X1.3/4 " | |
| SFL-48W | 3 " | 135 | 131 | 106.38 | 61.93 | M16X45 | 13.8 |
| SFL-48WUN | 3 " | 135 | 131 | 106.38 | 61.93 | 5/8 "-11X1.3/4 " | |
| SFL-56W | 3.1/2 " | 152 | 140 | 120.65 | 69.85 | M16X50 | 3.4 |
| SFL-56WUN | 3.1/2 " | 152 | 140 | 120.65 | 69.85 | 5/8 "-11X2 " | |
| SFL-64W | 4 " | 162 | 152 | 130.18 | 77.77 | M16X50 | |
| SFL-64WUN | 4 " | 162 | 152 | 130.18 | 77.77 | 5/8 "-11X2 " | |

注:螺栓需另订
Note: Bolt should be ordered another.

SFS-W

SAE 整体法兰夹6000PSI
SAE WHOLE FLANGE CLAMPS 6000PSI
ISO 6162-2—SAE J518



| 代号 PART NO. | 法兰型号 FLANGE SIZE | 尺寸 DIMENSIONS | | | | 可配螺栓 BOLT | 工作压力 Mpa |
|----------------|---------------------|---------------|-------|------|------|-----------------|-------------|
| | | A | B | C | E | | |
| SFS-08W | 1/2" | 56.4 | 47.2 | 40.5 | 18.2 | M8X30 | 42 |
| SFS-08WUN | 1/2" | 56.4 | 47.2 | 40.5 | 18.2 | 5/16"-18X1.1/2" | |
| SFS-12W | 3/4" | 71.4 | 60 | 50.8 | 23.8 | M10X35 | |
| SFS-12WUN | 3/4" | 71.4 | 60 | 50.8 | 23.8 | 3/8"-16X1.1/2" | |
| SFS-16W | 1" | 81.2 | 69.6 | 57.2 | 27.8 | M12X45 | |
| SFS-16WUN | 1" | 81.2 | 69.6 | 57.2 | 27.8 | 7/16"-14X1.3/4" | |
| SFS-20W | 1.1/4" | 95.2 | 77.2 | 66.7 | 31.8 | M12X45 | |
| SFS-20WUN | 1.1/4" | 95.2 | 77.2 | 66.7 | 31.8 | 1/2"-13X1.3/4" | |
| SFS-24W | 1.1/2" | 112.8 | 95.4 | 79.4 | 36.6 | M16X55 | |
| SFS-24WUN | 1.1/2" | 112.8 | 95 | 79.4 | 36.6 | 5/8"-11X2.1/4" | |
| SFS-32W | 2" | 133.4 | 113.8 | 96.8 | 44.4 | M20X70 | |
| SFS-32WUN | 2" | 133.4 | 113.8 | 96.8 | 44.4 | 3/4"-10X2.3/4" | |

注:螺栓需另订
Note: Bolt should be ordered another.

如果您需要更多的详细信息,请与我们联系!
Please contact us if you need more information


241/三柯流体连接件

如果您需要更多的详细信息,请与我们联系!
Please contact us if you need more information

242/三柯流体连接件



卡套
Cutting ring




SRL
SRS

扫描获取三柯名片



| 系列 SERIES | 代号 RAPT NO. | 尺寸 DIMENSIONS | | 重量 克/件 | 最大工作压力 (bar) |
|--------------|----------------|---------------|------|-----------|-----------------|
| | | D | L | | |
| L | SRL-06 | 06 | 9 | 1.7 | 315 |
| | SRL-08 | 08 | 9 | 2.2 | 315 |
| | SRL-10 | 10 | 9.5 | 3.1 | 315 |
| | SRL-12 | 12 | 9.8 | 3.5 | 315 |
| | SRL-15 | 15 | 9.5 | 4.5 | 315 |
| | SRL-18 | 18 | 9.5 | 5.5 | 315 |
| | SRL-22 | 22 | 10.5 | 7.3 | 160 |
| | SRL-28 | 28 | 11.5 | 9.4 | 160 |
| | SRL-35 | 35 | 13.5 | 20 | 160 |
| S | SRL-42 | 42 | 13.5 | 23 | 160 |
| | SRS-06 | 06 | 9 | 1.7 | 630 |
| | SRS-08 | 08 | 9 | 3.2 | 630 |
| | SRS-10 | 10 | 9.5 | 3.1 | 630 |
| | SRS-12 | 12 | 9.8 | 3.5 | 630 |
| | SRS-14 | 14 | 9.5 | 3.9 | 630 |
| | SRS-16 | 16 | 9.5 | 5.6 | 400 |
| | SRS-20 | 20 | 12.5 | 11.4 | 400 |
| | SRS-25 | 25 | 12.5 | 13.3 | 400 |
| | SRS-35 | 30 | 12.5 | 19.3 | 400 |
| | SRS-38 | 38 | 13.5 | 22.5 | 315 |

钢丝护套
Spring guard

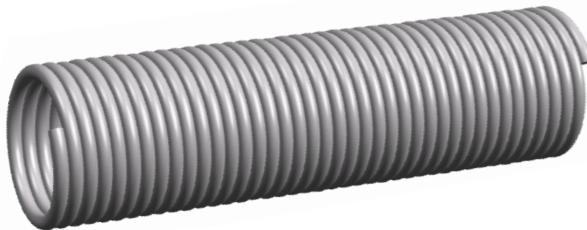

三柯代理：直接从给大厂做OEM代工的汗血工厂拿货（价格有绝对优势）

| 序号 NO. | 代号 PART NO | 内径 ID (mm) | 钢丝线径 Steel wire Φ | 可配胶管 Fit Hose |
|-----------|---------------|-----------------|----------------------|------------------------------|
| 1 | SP-15 | 15 | 1.5 | 1T04 |
| 2 | SP-17 | 17 | 1.5 | 1T05、2T04 |
| 3 | SP-19 | 19 | 1.5 | 1T06、2T05、4SP04 |
| 4 | SP-22 | 22 | 2 | 2T06、R1206、1T08 |
| 5 | SP-23 | 23 | 2 | 4SP06、2T08 |
| 6 | SP-25 | 25 | 2 | 1T10、R1208 |
| 7 | SP-26 | 26 | 2 | 4SP08 |
| 8 | SP-27 | 27 | 2 | 2T10 |
| 9 | SP-29 | 29 | 2 | R1210、1T12、4SP10 |
| 10 | SP-31 | 31 | 2 | 2T12 |
| 11 | SP-32 | 32 | 2 | R1212 |
| 12 | SP-33 | 33 | 2 | 4SP12、4SH12、R1312、R1512 |
| 13 | SP-37 | 37 | 2 | 1T16 |
| 14 | SP-40 | 40 | 2 | 2T16、R1216、R1316、R1516、4SH16 |
| 15 | SP-42 | 42 | 2.5 | 4SP16 |
| 16 | SP-45 | 45 | 2.5 | 1T20 |
| 17 | SP-47 | 47 | 2.5 | 4SH20 |
| 18 | SP-49 | 49 | 2.5 | 2T20、R1220 |
| 19 | SP-51 | 51 | 2.5 | R1320、R1520 |
| 20 | SP-52 | 52 | 2.5 | 1T24、4SP20 |
| 21 | SP-55 | 55 | 2.5 | R1224、4SH24 |
| 22 | SP-56 | 56 | 2.5 | 2T24 |
| 23 | SP-59 | 59 | 2.5 | 4SP24、R1324、R1524 |
| 24 | SP-66 | 66 | 2.5 | 1T32 |
| 25 | SP-69 | 69 | 2.5 | 2T32、R1232 |
| 26 | SP-71 | 71 | 2.5 | 4SP32、4SH32 |
| 27 | SP-74 | 74 | 2.5 | R1332 |

注：1、图示为密绕状态，使用时需拉伸；

2、表中规定弹簧长度为300mm；

3、表中可配胶管规格仅供参考，具体需实物测量。

Note:1、There is tightness,please stretch when use.

2、The spring length is 300mm

3、The fit hose only for reference. Please measure when you use.

尼龙螺旋保护套
Spiral Plastic Protective Sleeve



| 代号 PART NO | 内径 ID (mm) | 适用软管外径 HOSE OD(mm) |
|---------------|-----------------|-----------------------|
| RNL-08 | Φ8 | Φ8~Φ12 |
| RNL-10 | Φ10 | Φ10~Φ15 |
| RNL-12 | Φ12 | Φ12~Φ16 |
| RNL-16 | Φ16 | Φ16~Φ24 |
| RNL-18 | Φ18 | Φ18~Φ27 |
| RNL-21 | Φ21 | Φ21~Φ32 |
| RNL-25 | Φ25 | Φ25~Φ38 |
| RNL-28 | Φ28 | Φ28~Φ42 |
| RNL-30 | Φ30 | Φ30~Φ45 |
| RNL-32 | Φ32 | Φ32~Φ48 |
| RNL-35 | Φ35 | Φ35~Φ50 |
| RNL-38 | Φ38 | Φ38~Φ55 |
| RNL-42 | Φ42 | Φ42~Φ60 |
| RNL-45 | Φ45 | Φ45~Φ68 |
| RNL-50 | Φ50 | Φ50~Φ75 |
| RNL-60 | Φ60 | Φ60~Φ90 |

特性：

- 1、颜色：黑色、黄色、红色；
- 2、工作环境温度：-40~125℃；
- 3、抗静电，高耐磨，寿命长、弯曲半径小；
- 4、耐空气、水、油、汽油和各种溶剂。

Description:


- 1.Color:Black. Yellow. Red
- 2.Working Temp:-40~125°C
- 3.Anti-statics,Good Wear Resistant,Long Working Life ,Small Bend Radius
- 4.Air,Water,Oil,Gasoline and Solvent Resistant.

注：表中代号表示黑色，黄色代号后加Y，如RNL-18Y；
红色代号后加R，如RNL-30R。

Notes:The default Part NO. Is black ,if you need yellow ,please add "Y" in the end ,E.g .RNL-18Y,red is RNL-18R.

密封件
Seal

O型圈 O-ring



三柯代理了永华标准专用密封件（现货充足）

| DIN 24° 锥轻系列O型圈密封用O型圈 For DIN 24° Cone O-ring L.T. | | | | |
|---|---------|---------------|------|-----------|
| O型圈代号 | 螺纹 | 尺寸 DIMENSIONS | 管子外径 | |
| PART NO. | THREAD | d | b | TUBE O.D. |
| O04.5X1.5 | M12X1.5 | 4.5 | 1.5 | 6 |
| O06.5X1.5 | M14X1.5 | 6.5 | 1.5 | 8 |
| O08.0X1.5 | M16X1.5 | 8.0 | 1.5 | 10 |
| O10.0X1.5 | M18X1.5 | 10.0 | 1.5 | 12 |
| O12.0X2.0 | M22X1.5 | 12.0 | 2.0 | 15 |
| O15.0X2.0 | M26X1.5 | 15.0 | 2.0 | 18 |
| O15.0X2.0 | M27X1.5 | 15.0 | 2.0 | 18 |
| O19.0X2.0 | M30X2 | 19.0 | 2.0 | 22 |
| O25.0X2.0 | M36X2 | 25.0 | 2.0 | 28 |
| O32.0X2.5 | M45X2 | 32.0 | 2.5 | 35 |
| O38.0X2.5 | M52X2 | 38.0 | 2.5 | 42 |

| ISO 6162 法兰用O型圈 For ISO 6162 Flange O-ring | | | | |
|---|-------------|---------------|------|--|
| O型圈代号 | 法兰型号 | 尺寸 DIMENSIONS | | |
| PART NO. | FLANGE SIZE | d | b | |
| O18.64X3.53 | 1/2" | 18.64 | 3.53 | |
| O24.99X3.53 | 3/4" | 24.99 | 3.53 | |
| O32.92X3.53 | 1" | 32.92 | 3.53 | |
| O37.69X3.53 | 1.1/4" | 37.69 | 3.53 | |
| O47.22X3.53 | 1.1/2" | 47.22 | 3.53 | |
| O56.74X3.53 | 2" | 56.74 | 3.53 | |
| O69.44X3.53 | 2.1/2" | 69.44 | 3.53 | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| DIN 24° 锥轻系列O型圈密封用O型圈 For DIN 24° Cone O-ring L.T. | | | | |
|---|---------|---------------|------|-----------|
| O型圈代号 | 螺纹 | 尺寸 DIMENSIONS | 管子外径 | |
| PART NO. | THREAD | d | b | TUBE O.D. |
| O04.5X1.5 | M14X1.5 | 4.5 | 1.5 | 6 |
| O06.5X1.5 | M16X1.5 | 6.5 | 1.5 | 8 |
| O08.0X1.5 | M18X1.5 | 8.0 | 1.5 | 10 |
| O10.0X1.5 | M20X1.5 | 10.0 | 1.5 | 12 |
| O11.0X2.0 | M22X1.5 | 11 | 2.0 | 14 |
| O13.0X2.0 | M24X1.6 | 13 | 2.0 | 16 |
| O16.3X2.4 | M30X2 | 16.3 | 2.4 | 20 |
| O20.3X2.4 | M36X2 | 20.3 | 2.4 | 25 |
| O25.3X2.4 | M42X2 | 25.3 | 2.4 | 30 |
| O33.3X2.4 | M52X2 | 33.3 | 2.4 | 38 |

| 英管外螺纹O型圈密封接头用O型圈 For BSP Male O-ring | | | | |
|---|------------|---------------|------|--|
| O型圈代号 | 螺纹 | 尺寸 DIMENSIONS | | |
| PART NO. | THREAD | d | b | |
| O10.77X2.62 | G1/4"X19 | 10.77 | 2.62 | |
| O13.94X2.62 | G3/8"X19 | 13.94 | 2.62 | |
| O17.12X2.62 | G1/2"X14 | 17.12 | 2.62 | |
| O19.18X2.46 | G5/8"X14 | 19.18 | 2.46 | |
| O23.47X2.62 | G3/4"X14 | 23.47 | 3.53 | |
| O29.74X3.53 | G1"X11 | 29.74 | 3.53 | |
| O37.69X3.53 | G1.1/4"X11 | 37.69 | 3.53 | |
| O44.04X3.53 | G1.1/2"X11 | 44.04 | 3.53 | |
| O54.0X3.0 | G2"X11 | 54.0 | 3.0 | |
| | | | | |
| | | | | |
| | | | | |


| 美制ORFS外螺纹平面O型圈密封用O型圈 For ORFS Male O-ring | | | | |
|--|---------------|---------------|------|--|
| O型圈代号 | 螺纹 | 尺寸 DIMENSIONS | | |
| PART NO. | THREAD | d | b | |
| O7.65X1.78 | 9/16"X18UNF | 7.65 | 1.78 | |
| O9.25X1.78 | 11/16"X16UN | 9.25 | 1.78 | |
| O12.42X1.78 | 13/16"X16UN | 12.42 | 1.78 | |
| O15.6X1.78 | 1"X14UNSf | 15.6 | 1.78 | |
| O18.77X1.78 | 1.3/16"X12UN | 18.77 | 1.78 | |
| O23.52X1.78 | 1.7/16"X12UN | 23.52 | 1.78 | |
| O29.87X1.78 | 1.11/16"X12UN | 29.87 | 1.78 | |
| O37.82X1.78 | 2"X12UN | 37.82 | 1.78 | |

| SAE矿用接头用O型圈 For SAE Sraplelok O-ring | | | | |
|---|--------------|---------------|-----|--|
| O型圈代号 | 规格 | 尺寸 DIMENSIONS | | |
| PART NO. | FITTING SIZE | d | b | |
| O06.0X2.0 | -04 | 6.0 | 2.0 | |
| O10.0X2.0 | -06 | 10.0 | 2.0 | |
| O13.0X2.5 | -08 | 13.0 | 2.5 | |
| O19.0X2.5 | -12 | 19.0 | 2.5 | |
| O25.0X2.5 | -16 | 25.0 | 2.5 | |
| O33.0X2.5 | -20 | 33.0 | 2.5 | |
| O40.0X3.0 | -24 | 40.0 | 3.0 | |
| O50.0X3.0 | -32 | 50.0 | 3.0 | |

| 公制外螺纹可调向柱端用O型圈 For Metric Male Adjustable Stud End O-ring | | | | |
|--|---------|---------------|-----|--|
| O型圈代号 | 螺纹 | 尺寸 DIMENSIONS | | |
| PART NO. | THREAD | d | b | |
| O06.1X1.6 | M8X1 | 6.1 | 1.6 | |
| O08.1X1.6 | M10X1 | 8.1 | 1.6 | |
| O09.3X2.4 | M12X1.5 | 9.3 | 2.4 | |
| O11.3X2.4 | M14X1.5 | 11.3 | 2.4 | |
| O13.3X2.4 | M16X1.5 | 13.3 | 2.4 | |
| O15.3X2.4 | M18X1.5 | 15.3 | 2.4 | |
| O17.3X2.4 | M20X1.5 | 17.3 | 2.4 | |
| O19.3X2.4 | M22X1.5 | 19.3 | 2.4 | |
| O21.3X3.0 | M24X1.5 | 21.3 | 3.0 | |
| O23.5X3.0 | M26X1.5 | 23.5 | 3.0 | |
| O23.5X3.0 | M27X2 | 23.5 | 3.0 | |
| O26.5X3.0 | M30X2 | 26.5 | 3.0 | |
| O29.5X3.0 | M33X2 | 29.5 | 3.0 | |
| O38.5X3.0 | M42X2 | 38.5 | 3.0 | |
| O44.5X3.0 | M48X2 | 44.5 | 3.0 | |
| O46.2X3.0 | M60X2 | 46.2 | 3.0 | |


| 美制SAE外螺纹O型圈密封接头用O型圈 For SAE Male O-ring | | | | |
|--|--------|---------------|---|--|
| O型圈代号 | 螺纹 | 尺寸 DIMENSIONS | | |
| PART NO. | THREAD | d | b | |
| O8.92X1.83 | 7/1 | | | |

KDS 弹性密封垫



| 密封垫代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | | | |
|-------------------|--------------|---------------|------|------|-----|-----|
| | | D1 | D2 | D3 | L1 | L2 |
| KDS-M10 | M10、G1/8" | 10.3 | 14.9 | 16.0 | 2.5 | 1.1 |
| KDS-M12 | M12 | 12.3 | 17.0 | 18.0 | 3.0 | 1.6 |
| KDS-M14 | M14、G1/4" | 14.3 | 18.9 | 20.0 | 3.0 | 1.6 |
| KDS-M16 | M16、G3/8" | 17.0 | 21.9 | 24.0 | 3.0 | 2.1 |
| KDS-M18 | M18 | 18.3 | 23.9 | 23.9 | 3.0 | |
| KDS-M22 | M22、G1/2" | 22.3 | 26.9 | 30.0 | 4.5 | 2.6 |
| KDS-M26 | M26 | 26.3 | 31.9 | 35.0 | 3.5 | 2.6 |
| KDS-M27 | M27、3/4" | 27.3 | 32.9 | 38.0 | 3.5 | 2.6 |
| KDS-M33 | M33、G1" | 33.6 | 39.9 | 42.0 | 3.5 | 2.6 |
| KDS-M42 | M42、G1.1/4" | 42.4 | 49.9 | 49.9 | 3.5 | |
| KDS-M48 | M48、G1.1/2" | 48.4 | 55.9 | 60.0 | 3.5 | 2.6 |

GDK 钢垫




| 钢垫代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | |
|------------------|--------------|---------------|----|-----|
| | | D1 | D2 | D3 |
| GDK-B02 | G1/8"X28 | 9.8 | 14 | 2.5 |
| GDK-B04 | G1/4"X19 | 13.3 | 18 | 3.0 |
| GDK-B06 | G3/8"X19 | 16.8 | 22 | 3.0 |
| GDK-B08 | G1/2"X14 | 21.1 | 26 | 4.5 |
| GDK-B12 | G3/4"X14 | 26.6 | 32 | 3.5 |
| GDK-B16 | G1"X11 | 33.4 | 39 | 3.5 |
| GDK-B20 | G1.1/4"X11 | 42.1 | 49 | 3.5 |
| GDK-B24 | G1.1/2"X11 | 48.1 | 55 | 3.5 |

| 钢垫代号 PART NO. | 螺纹 THREAD | 尺寸 DIMENSIONS | | |
|------------------|--------------|---------------|----|-----|
| PART NO. | THREAD | D1 | D2 | D3 |
| GDK-M8 | M8X1 | 8.1 | 12 | 2.5 |
| GDK-M10 | M10X1 | 10.1 | 14 | 3.0 |
| GDK-M12 | M12X1.5 | 12.1 | 17 | 3.0 |
| GDK-M14 | M14X1.5 | 14.1 | 19 | 3.0 |
| GDK-M16 | M16X1.5 | 16.1 | 21 | 3.0 |
| GDK-M18 | M18X1.5 | 18.1 | 23 | 3.0 |
| GDK-M20 | M20X1.5 | 20.1 | 25 | 3.0 |
| GDK-M22 | M22X1.5 | 22.1 | 27 | 4.5 |
| GDK-M26 | M26X1.5 | 26.1 | 31 | 3.5 |
| GDK-M27 | M27X2 | 27.1 | 32 | 3.5 |
| GDK-M33 | M33X2 | 33.1 | 39 | 3.5 |
| GDK-M42 | M42X2 | 42.1 | 49 | 3.5 |
| GDK-M48 | M48X2 | 48.1 | 55 | 3.5 |

油口型式及尺寸
Port Dimensions

1 ISO9974-1公制螺纹油口及相配柱端
ISO9974-1 metric thread port and mating stud end

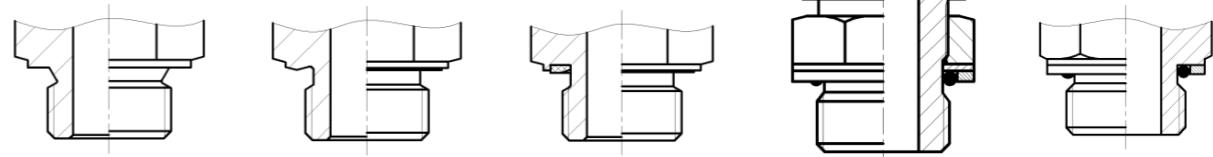


A型柱端
Type A

ISO 9974-3 B型柱端
ISO 9974-3 Type B

ISO 9974-2 E型柱端
ISO 9974-2 Type E

O形圈密封
O-Ring Seal

O形圈密封
O-Ring Seal

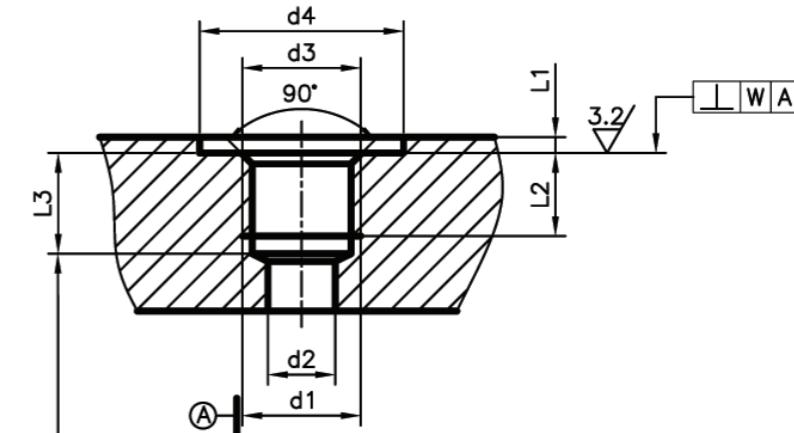

用于不允许丝锥穿过整体时


This dimension only applies when tap drill
cannot pass through the entire boss

ISO 9974-1 油口Port


油口尺寸Port Dimensions mm

| 螺纹 d1 Thread | d2 参考 ref. | d3 | | d4 min. | L1 max. | L2 min. | L3 min. | W |
|-----------------|---------------|---------|---------|------------|------------|------------|------------|-----|
| | | 尺寸 nom. | 公差 tol. | | | | | |
| M8X1 | 3 | 8 | 0,+0.2 | 13 | 1 | 8 | 10 | 0.1 |
| M10X1 | 4.5 | 10 | 0,+0.2 | 15 | 1 | 8 | 10 | 0.1 |
| M12X1.5 | 6 | 12 | 0,+0.2 | 18 | 1.5 | 12 | 15 | 0.1 |
| M14X1.5 | 7 | 14 | 0,+0.2 | 20 | 1.5 | 12 | 15 | 0.1 |
| M16X1.5 | 9 | 16 | 0,+0.2 | 23 | 1.5 | 12 | 15 | 0.1 |
| M18X1.5 | 11 | 18 | 0,+0.2 | 25 | 2 | 12 | 15 | 0.1 |
| M20X1.5 | 10 | 20 | 0,+0.2 | 27 | 2 | 14 | 17 | 0.1 |
| M22X1.5 | 14 | 22 | 0,+0.2 | 28 | 2.5 | 14 | 17 | 0.1 |
| M26X1.5 | 18 | 26 | 0,+0.2 | 33 | 2.5 | 16 | 19 | 0.2 |
| M27X2 | 16 | 27 | 0,+0.2 | 33 | 2.5 | 16 | 20 | 0.2 |
| M33X2 | 23 | 33 | 0,+0.3 | 41 | 2.5 | 18 | 22 | 0.2 |
| M42X2 | 30 | 42 | 0,+0.3 | 51 | 2.5 | 20 | 24 | 0.2 |
| M48X2 | 36 | 48 | 0,+0.3 | 56 | 2.5 | 22 | 36 | 0.2 |

2、ISO6149-1公制螺纹油口及相配柱端
ISO6149-1 metric thread port and mating stud end


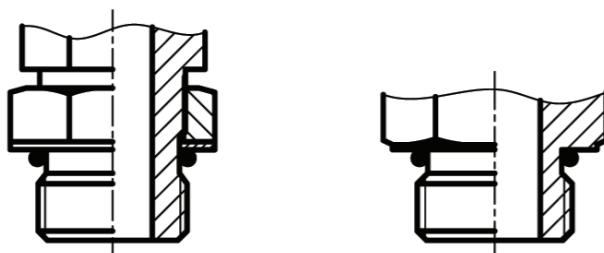


ISO 6149-2、ISO 6149-3 柱端stud end

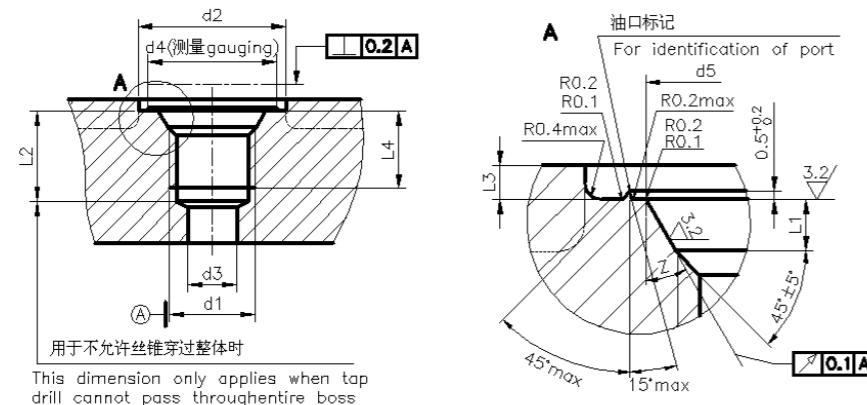

ISO 6149-1 油口Port

3、DIN 3582英管螺纹油口及相配柱端
DIN 3582 BSP thread port and mating stud end

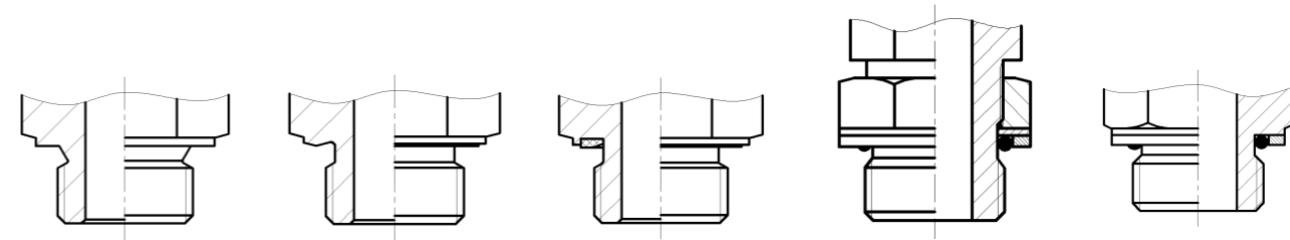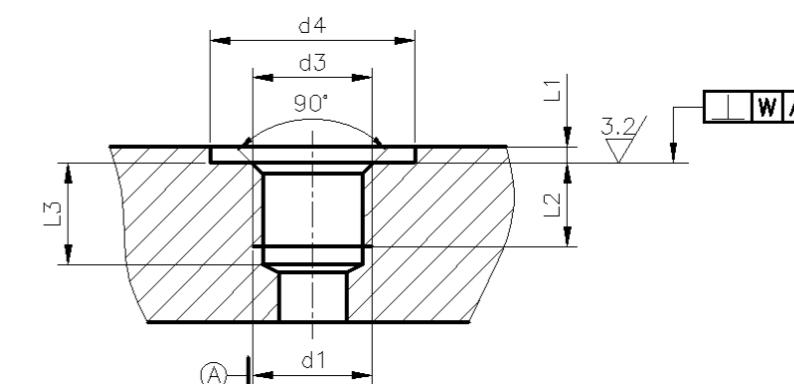DIN 3852 A型柱端
DIN 3852 Type ADIN 3852 B型柱端
DIN 3852 Type BDIN 3852 E型柱端
DIN 3852 Type EO形圈密封
O-Ring SealO形圈密封
O-Ring Seal

DIN 3852 油口Port


油口尺寸Port Dimensions mm

| 螺纹 d1 Thread | d2 | | d3 参考 ref. | d4 | d5 +0.1 0 | d6 +0.5 0 | L1 +0.4 0 | L2 min. | L3 max. | L4 min. | Z° ±1° | O形圈 O-RING |
|-----------------|--------------------|--------------------|------------------|------|-----------------|-----------------|-----------------|------------|------------|------------|-----------|---------------|
| | min. ¹⁾ | min. ²⁾ | | | | | | | | | | |
| M8X1 | 17 | 14 | 3 | 12.5 | 9.1 | 14 | 1.6 | 11.5 | 1 | 10 | 12 | 6.1X1.6 |
| M10X1 | 20 | 16 | 4.5 | 14.5 | 11.1 | 16 | 1.6 | 11.5 | 1 | 10 | 12 | 8.1X1.6 |
| M12X1.5 | 23 | 19 | 6 | 17.5 | 13.8 | 19 | 2.4 | 14 | 1.5 | 11.5 | 15 | 9.3X2.2 |
| M14X1.5 | 25 | 21 | 7.5 | 19.5 | 15.8 | 21 | 2.4 | 14 | 1.5 | 11.5 | 15 | 11.3X2.2 |
| M16X1.5 | 28 | 24 | 9 | 22.5 | 17.8 | 24 | 2.4 | 15.5 | 1.5 | 13 | 15 | 13.3X2.2 |
| M18X1.5 | 30 | 26 | 11 | 24.5 | 19.8 | 26 | 2.4 | 17 | 2 | 14.5 | 15 | 15.3X2.2 |
| M20X1.5 | 32 | 27 | -- | 25.5 | 21.8 | 27 | 2.4 | -- | 2 | 14.5 | 15 | 17.3X2.2 |
| M22X1.5 | 34 | 29 | 14 | 27.5 | 23.8 | 29 | 2.4 | 18 | 2 | 14.5 | 15 | 19.3X2.2 |
| M27X2 | 40 | 34 | 18 | 32.5 | 29.4 | 34 | 3.1 | 22 | 2 | 19 | 15 | 23.6X2.9 |
| M33X2 | 49 | 43 | 23 | 41.5 | 35.4 | 43 | 3.1 | 22 | 2.5 | 19 | 15 | 29.6X2.9 |
| M42X2 | 60 | 52 | 30 | 50.5 | 44.4 | 52 | 3.1 | 22.5 | 2.5 | 19.5 | 15 | 38.6X2.9 |
| M48X2 | 66 | 57 | 36 | 55.5 | 50.4 | 57 | 3.1 | 25 | 2.5 | 22 | 15 | 44.6X2.9 |
| M60X2 | 76 | 67 | 44 | 65.5 | 62.4 | 67 | 3.1 | 27.5 | 2.5 | 24.5 | 15 | 56.6X2.9 |


油口尺寸Port Dimensions mm

| 螺纹 d1 Thread | d3 | d4 +0.4 0 | | L1 max. | L2 max. | L3 max. | W |
|-----------------|------|--------------------|--------------|------------|------------|------------|------|
| | | B、E型柱端 Type B、E | 其它 Others | | | | |
| G1/8X28 | 9.8 | 0,+0.2 | 15 | 19 | 1 | 8 | 13 |
| G1/4X19 | 13.2 | 0,+0.2 | 19 | 25 | 1.5 | 12 | 18.5 |
| G3/8X19 | 16.7 | 0,+0.2 | 23 | 28 | 2 | 12 | 18.5 |
| G1/2X14 | 21 | 0,+0.2 | 27 | 34 | 2.5 | 14 | 22 |
| G1/8X32 | 26.5 | 0,+0.2 | 33 | 42 | 2.5 | 16 | 24 |
| G1X11 | 33.3 | 0,+0.3 | 40 | 47 | 2.5 | 18 | 27 |
| G1.1/4X11 | 42 | 0,+0.3 | 50 | 58 | 2.5 | 20 | 29 |
| G1.1/2X11 | 47.9 | 0,+0.3 | 56 | 65 | 2.5 | 22 | 31 |
| G2X11 | 59.7 | 0,+0.3 | 69 | 76 | 3 | 24 | 33 |

4、BS5380英管螺纹油口及相配柱端
Bs5380 BSP thread port and mating stud end

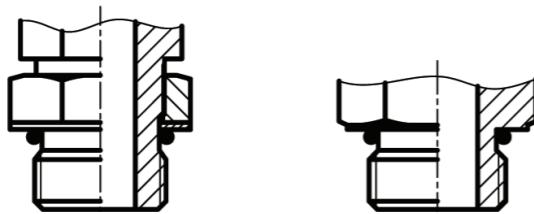


BS 5380 柱端 BS 5380 stud end

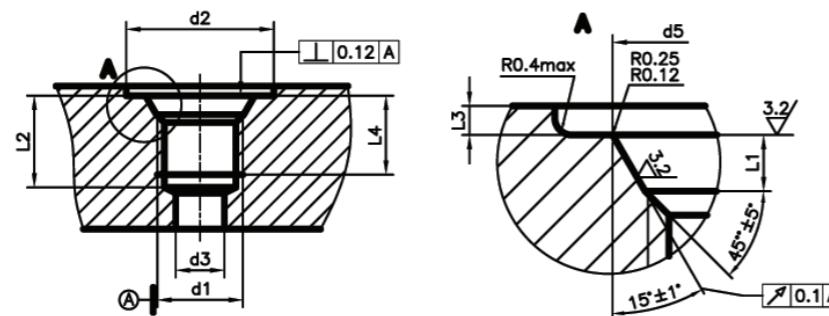


BS 5380 油口Port

5、JIS B 2351英管螺纹油口及相配柱端
JIS B 2351 BSP thread port and mating stud end

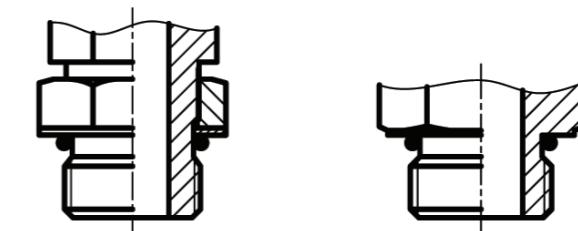

JIS B2351 柱端 JIS B 2351 stud end

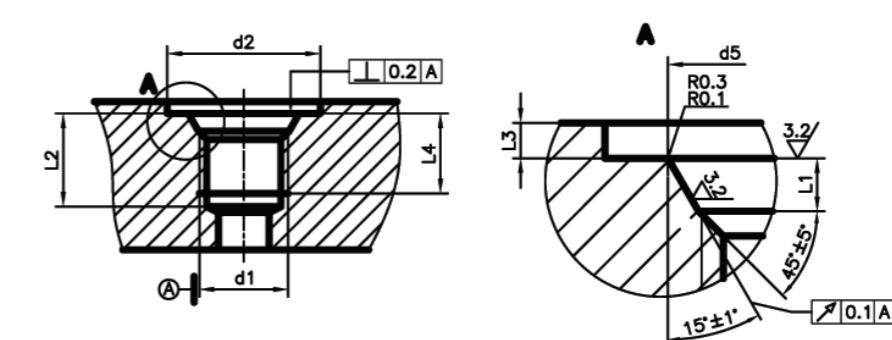

JIS B 2351 油口Port


油口尺寸 Port Dimensions mm

| 螺纹 d1 Thread | d2 max. | d3 max. | d5 +0.12 0 | L1 +0.4 0 | L3 max. | L4 min. | O形圈 O-RING |
|-----------------|------------|------------|------------------|-----------------|------------|------------|---------------|
| G1/8X28 | 15 | 14 | 11.24 | 1.3 | 0.6 | 10.5 | 8.1X1.6 |
| G1/4X19 | 19 | 18 | 14.16 | 1.2 | 0.6 | 11 | 10.1X1.6 |
| G3/8X19 | 23 | 22 | 18.86 | 1.9 | 0.6 | 12.5 | 13.6X2.4 |
| G1/2X14 | 27 | 26 | 22.40 | 1.9 | 0.8 | 15 | 17.6X2.4 |
| G5/8X14 | 31 | 30 | 26.00 | 2.4 | 0.8 | 16.3 | 19.5X3.0 |
| G3/4X14 | 33 | 32 | 28.92 | 2.4 | 1.1 | 16.3 | 22.5X3.0 |
| G1X11 | 40 | 39 | 35.50 | 2.4 | 1.1 | 19.1 | 29.5X3.0 |
| G1.1/4X11 | 50 | 49 | 43.56 | 2.4 | 1.1 | 21.4 | 36.5X3.0 |
| G1.1/2X11 | 56 | 55 | 49.42 | 2.4 | 1.1 | 22.5 | 42.5X3.0 |
| G2X11 | 69 | 68 | 61.42 | 2.4 | 1.1 | 25.7 | 54.5X3.0 |


油口尺寸 Port Dimensions mm

| 螺纹 Thread d1 | d2 ± 0.3 | d5 +0.1 0 | L1 +0.4 0 | L2 min. | L3 max. | L4 min. | O形圈 O-RING |
|--------------------|-------------|-----------------|-----------------|------------|------------|------------|---------------|
| G1/8X28 | 18 | 11.6 | 2 | 15 | 1 | 10 | 7.8X1.9 |
| G1/4X19 | 24 | 15.6 | 2.5 | 18 | 1.5 | 12 | 10.8X2.4 |
| G3/8X19 | 28 | 18.6 | 2.5 | 18 | 2 | 12 | 13.8X2.4 |
| G1/2X14 | 34 | 22.6 | 2.5 | 24 | 2.5 | 16 | 17.8X2.4 |
| G3/4X14 | 45 | 29.8 | 3.5 | 25 | 2.5 | 17 | 23.7X3.5 |
| G1X11 | 51 | 35.8 | 3.5 | 30 | 2.5 | 21 | 28.7X3.5 |
| G1.1/4X11 | 62 | 44.8 | 3.5 | 30 | 2.5 | 21.4 | 37.7X3.5 |
| G1.1/2X11 | 68 | 50.8 | 3.5 | 30 | 2.5 | 21.4 | 43.7X3.5 |

6、ISO11926-1美制螺纹油口及相配柱端
ISO11926-1 SAE thread port and mating stud end

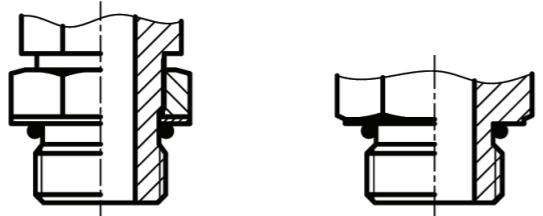

ISO 11926-2、ISO 11926-3 美制螺纹柱端
ISO 11926-2、ISO 11926-3 SAE thread stud end

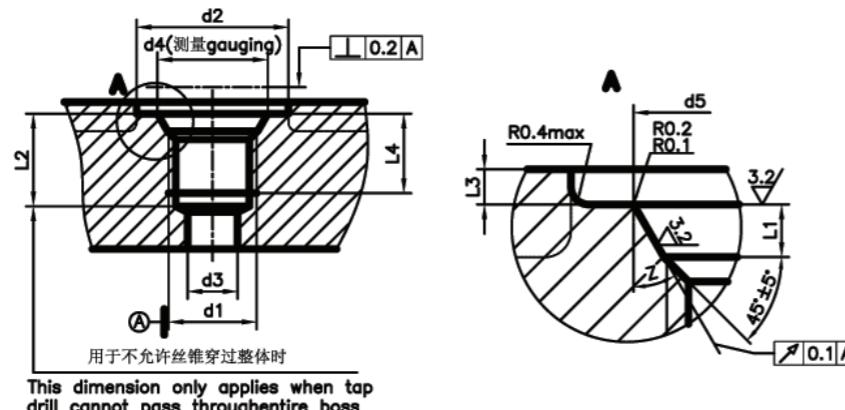

ISO 11926-1 美制螺纹油口
ISO 11926-1 SAE thread port

油口尺寸 Port Dimensions mm

| 螺纹 Thread d1 | d2 max. | d3 参考 ref. | d4 min. | d5 \pm 0.05 | L1 $+0.4$ 0 | L2 min. | L3 min. | L4 min. | Z° $\pm 1^\circ$ | O形圈 O-RING |
|-----------------|------------|------------------|------------|---------------------|-------------------|------------|------------|------------|---------------------|---------------|
| 5/16"X24 | 17 | 2.5 | 11 | 9.15 | 1.9 | 12 | 1.6 | 10 | 12 | 6.07X1.63 |
| 3/8"X24 | 19 | 3.5 | 13 | 10.75 | 2.4 | 12 | 1.6 | 10 | 12 | 7.65X1.63 |
| 7/16"X20 | 21 | 4.5 | 15 | 12.45 | 2.4 | 14 | 1.6 | 11.5 | 12 | 8.92X1.83 |
| 1/2"X20 | 23 | 6 | 16 | 14.05 | 2.5 | 14 | 1.6 | 11.5 | 12 | 10.52X1.83 |
| 9/16"X18 | 25 | 7.5 | 18 | 15.70 | 2.5 | 15.5 | 2.4 | 12.7 | 15 | 11.89X1.98 |
| 3/4"X16 | 30 | 10 | 22 | 20.65 | 2.5 | 17.5 | 2.4 | 14.3 | 15 | 16.36X2.21 |
| 7/8"X14 | 34 | 12.5 | 26 | 24 | 3.3 | 20 | 2.4 | 16.7 | 15 | 19.18X2.46 |
| 1.1/16"X12 | 41 | 16 | 32 | 29.2 | 3.3 | 23 | 2.4 | 19 | 15 | 23.47X2.95 |
| 1.3/16"X12 | 45 | 18 | 35 | 32.4 | 3.3 | 23 | 2.4 | 19 | 15 | 26.62X2.95 |
| 1.5/16"X12 | 49 | 21 | 38 | 35.55 | 3.3 | 23 | 3.2 | 19 | 15 | 29.74X2.95 |
| 1.5/8"X12 | 58 | 27 | 48 | 43.55 | 3.3 | 23 | 3.2 | 19 | 15 | 37.46X3.00 |
| 1.7/8"X12 | 65 | 33 | 54 | 49.9 | 3.3 | 23 | 3.2 | 19 | 15 | 43.69X3.00 |
| 2.1/2"X12 | 88 | 45 | 70 | 65.75 | 3.3 | 23 | 3.2 | 19 | 15 | 59.36X3.00 |

公制螺纹 Metric Thread

| 螺纹 Thread | 安装扭矩 (牛·米) n. m |
|-----------|-----------------|
| M12X1.5 | 10-20 |
| M14X1.5 | 20-35 |
| M16X1.5 | 25-40 |
| M18X1.5 | 30-45 |
| M20X1.5 | 35-50 |
| M22X1.5 | 40-70 |
| M24X1.5 | 40-70 |
| M26X1.5 | 60-100 |
| M30X2.0 | 80-120 |
| M36X2.0 | 100-150 |
| M42X2.0 | 150-220 |
| M45X2.0 | 180-250 |
| M52X2.0 | 200-300 |

英管螺纹 BSP Thread

| 螺纹 Thread | 安装扭矩 (牛·米) n. m |
|------------|-----------------|
| G1/8"X28 | 9-12 |
| G1/4"X19 | 15-24 |
| G3/8"X19 | 26-38 |
| G1/2"X14 | 41-49 |
| G5/8"X14 | 50-60 |
| G3/4"X14 | 68-81 |
| G1"X11 | 107-129 |
| G1.14"X11 | 172-206 |
| G1.1/2"X11 | 226-258 |
| G2"X11 | 355-426 |

美制JIC螺纹 JIC Thread

| 螺纹 Thread | 安装扭矩 (牛·米) n. m |
|------------|-----------------|
| 7/16" X20 | 13-15 |
| 1/2"X20 | 18-20 |
| 9/16"X18 | 23-26 |
| 3/4"X16 | 47-52 |
| 7/8"X14 | 69-76 |
| 1.1/16"X12 | 96-106 |
| 1.3/16"X12 | 108-125 |
| 1.5/16"X12 | 127-141 |
| 1.5/8"X12 | 169-188 |
| 1.7/8"X12 | 212-235 |
| 2.1/2"X12 | 296-329 |

单位换算表 Conversion Factor

| 性质 | 单位 | 基本单位 | 转换单位 | 转换系数 |
|----|----------|-----------------|-----------------|---|
| 长度 | 英寸 | in | mm | 25.4 |
| | 毫米 | mm | in | 0.03934 |
| | 英尺 | ft | m | 0.3048 |
| | 米 | m | ft | 3.28084 |
| 面积 | 平方英寸 | sq in | cm ² | 6.4516 |
| | 立方厘米 | cm ² | sq in | 0.155 |
| 容积 | 加仑(英) | gal | l | 4.54596 |
| | 升 | l | gal(UK) | 0.219976 |
| | 加仑(美) | gal | l | 3.78533 |
| | 升 | l | gal(US) | 0.264177 |
| 重量 | 磅 | lb | kg | 0.453592 |
| | 千克 | g | lb | 2.204622 |
| 力矩 | 磅英寸 | lb/ft | kg/m | 1.488164 |
| | 牛米 | kg/m | lb/ft | 0.671969 |
| 压力 | 磅每平方英寸 | psi | bar | 0.06895 |
| | 巴 | bar | psi | 14.5035 |
| | 磅每平方英寸 | psi | Mpa | 0.006895 |
| | 兆帕 | Mpa | psi | 145.035 |
| | 千帕 | kPa | bar | 0.01 |
| | 巴 | bar | kPa | 100 |
| | 兆帕 | Mpa | bar | 10 |
| | 巴 | bar | Mpa | 0.1 |
| 速度 | 英尺每秒 | ft/s | m/s | 0.3048 |
| | 米每秒 | m/s | ft/s | 3.280840 |
| 流量 | 加仑每分钟 | gal/min. | l/min. | 4.54596 |
| | 升每分钟 | l/min. | gal/min.(UK) | 0.219976 |
| | 加仑每分钟(美) | gal/min. | l/min. | 3.78533 |
| | 升每分钟 | L/min. | gal/min.(US) | 0.264178 |
| 温度 | 华氏度 | °F | °C | ($\frac{9}{5}^{\circ}\text{C} + 32$) |
| | 摄氏度 | °C | °F | ($^{\circ}\text{F} - 32$) $\frac{5}{9}$ |

(UK) 英国单位
(US) 美国单位

套筒型号索引 Ferrelle Part NO. Index

| 型号 PART NO. | 页码 PAGE |
|-------------|---------|
| S00018 | 22 |
| S00100 | 22 |
| S00200 | 23 |
| S00110-A | 23 |
| S00110 | 23 |
| S00210 | 24 |
| S03310 | 24 |
| S01100 | 24 |
| S01200 | 25 |
| S01300 | 25 |
| S01400 | 26 |
| S00400 | 26 |
| S00401 | 26 |
| S00621 | 27 |

软管接头型号索引 Hose Fitting Part NO. Index

| 型号 PART NO. | 页码 PAGE |
|-------------|---------|
| S10411 | 43 |
| S10411-RW | 29 |
| S10511 | 47 |
| S10511-RW | 31 |
| S12611 | 59 |
| S12611A | 59 |
| S12611A-RW | 33 |
| S13011 | 67 |
| S14211 | 75 |
| S14211-RW | 37 |
| S14213 | 91 |
| S15611 | 74 |
| S15611SW | 74 |
| S15691KSW | 75 |
| S16711 | 78 |
| S16711-RW | 35 |
| S20011-T | 82 |
| S20111 | 50 |
| S20111-T | 50 |
| S20141 | 50 |
| S20141-T | 50 |
| S20191 | 51 |
| S20191-T | 51 |
| S20211 | 51 |
| S20211-T | 51 |
| S20241 | 52 |
| S20241-T | 52 |
| S20291 | 52 |
| S20291-T | 52 |
| S20411-T | 44 |
| S20411-TRW | 29 |
| S20411-W | 44 |
| S20441-T | 45 |
| S20441-TRW | 30 |
| S20441-W | 45 |
| S20491-T | 46 |
| S20491-TRW | 30 |
| S20491-W | 46 |
| S24243 | 91 |
| S24291 | 77 |
| S24291-RW | 39 |

型号索引 Part NO. Index

| 型号 PART NO. | 页码 PAGE |
|-------------|---------|
| S24291-T | 77 |
| S24291-TRW | 39 |
| S24293 | 92 |
| S26711 | 79 |
| S26711D | 79 |
| S26711D-SM | 80 |
| S26711-RW | 36 |
| S26711-T | 79 |
| S26713 | 90 |
| S26741 | 80 |
| S26741-RW | 36 |
| S26741-T | 80 |
| S26743 | 90 |
| S26791 | 81 |
| S26791K | 81 |
| S26791-RW | 37 |
| S26791-T | 81 |
| S26793 | 90 |
| S28611 | 70 |
| S28611GM | 71 |
| S28641 | 71 |
| S28691 | 72 |
| S29611 | 72 |
| S29641 | 73 |
| S29691 | 73 |
| S50011 | 56 |
| S50041 | 57 |
| S50091 | 58 |
| S60011 | 85 |
| S70011 | 86 |
| S700M | 87 |
| S72011 | 86 |
| S720B | 87 |
| S87311 | 82 |
| S87311-RW | 40 |
| S87313 | 92 |
| S87341 | 83 |
| S87341-RW | 40 |
| S87343 | 92 |
| S87391 | 83 |
| S87391-RW | 41 |
| S87393 | 93 |
| S87611 | 84 |
| S87611-RW | 41 |
| S87613 | 93 |
| S87641 | 84 |
| S87641-RW | 42 |
| S87643 | 93 |
| S87691 | 85 |
| S87691-RW | 42 |
| S87693 | 94 |
| S87913 | 94 |
| S87943 | 94 |
| S87993 | 95 |
| S90011 | 87 |

过渡接头型号索引
ADAPTER Part NO. Index

| 型号 PART NO. | 页码 PAGE |
|-------------|---------|
| S1B | 160 |
| S1B4 | 161 |
| S1B9 | 161 |
| S1BG | 164 |
| S1BG4-OG | 164 |
| S1BG9-OG | 165 |
| S1BH | 175 |
| S1BH4-OG | 175 |
| S1BH9-OG | 176 |
| S1BJ | 178 |
| S1BJ9 | 179 |
| S1BM | 177 |
| S1BN | 180 |
| S1BN9 | 181 |
| S1BO | 174 |
| S1BT4-SP | 167 |
| S1BT9-SP | 168 |
| S1BT-SP | 166 |
| S1BW | 173 |
| S1B-WD | 165 |
| S1C | 97 |
| S1C9 | 97 |
| S1CB | 104 |
| S1CB-WD | 105 |
| S1CFG | 132 |
| S1CFG9 | 132 |
| S1CFL | 130 |
| S1CFL9 | 131 |
| S1CG | 109 |
| S1CG4-OG | 118 |
| S1CG9-OG | 118 |
| S1CH | 111 |
| S1CH4-OG | 119 |
| S1CH9-OG | 119 |
| S1CI-B-GDK | 134 |
| S1CI-B-KDS | 134 |
| S1CI-GDK | 133 |
| S1CI-KDS | 133 |
| S1CM | 107 |
| S1CM-WD | 108 |
| S1CN | 113-114 |
| S1CN9 | 127 |
| S1CO | 112 |
| S1CO4-OG | 120 |
| S1CO9-OG | 121 |
| S1CT9-SP | 126 |
| S1CT-SP | 113 |
| S1CW | 128 |
| S1C-Y | 98 |
| S1D | 97 |
| S1D9 | 97 |
| S1DB | 104 |
| S1DB-WD | 106 |
| S1DFG | 132 |
| S1DFG9 | 132 |

| 型号 PART NO. | 页码 PAGE |
|-------------|---------|
| S1DFL | 130 |
| S1DFL9 | 131 |
| S1DFS | 130 |
| S1DFS9 | 131 |
| S1DG | 109-110 |
| S1DG4-OG | 118 |
| S1DG9-OG | 118 |
| S1DH | 111 |
| S1DH4-OG | 119 |
| S1DH9-OG | 119 |
| S1DI-B-GDK | 134 |
| S1DI-B-KDS | 134 |
| S1DI-GDK | 133 |
| S1DI-KDS | 133 |
| S1DM | 107 |
| S1DM-WD | 108 |
| S1DN | 114 |
| S1DN9 | 127 |
| S1DO | 112 |
| S1DO4-OG | 120 |
| S1DO9-OG | 121 |
| S1DT9-SP | 126 |
| S1DW | 128 |
| S1D-Y | 98 |
| S1E | 137 |
| S1E9 | 137 |
| S1EH | 138 |
| S1EH4-OG | 138 |
| S1EH9-OG | 139 |
| S1EL | 139 |
| S1EN | 140 |
| S1ET-SP | 141 |
| S1EW | 141 |
| S1EW9 | 142 |
| S1F | 215 |
| S1F9 | 215 |
| S1FB-WD | 223 |
| S1FG9-OG | 224 |
| S1FH | 222 |
| S1FH9-OG | 222 |
| S1FLW | 233 |
| S1FLW9-W | 235 |
| S1FLW-PM | 234 |
| S1FM-WD | 221 |
| S1FN | 219 |
| S1FN9 | 220 |
| S1FO | 220 |
| S1FO9-OG | 221 |
| S1FSW | 233 |
| S1FSW9-W | 235 |
| S1FSW-PM | 234 |
| S1J | 191 |
| S1J4 | 191 |
| S1J9 | 192 |
| S1JB-WD | 206 |

| 型号 PART NO. | 页码 PAGE |
|-------------|---------|
| S1JFL | 197 |
| S1JFL9 | 197 |
| S1JFS | 198 |
| S1JFS9 | 198 |
| S1JG | 208 |
| S1JG4-OG | 209 |
| S1JG9-OG | 209 |
| S1JH | 207 |
| S1JH4-OG | 207 |
| S1JH9-OG | 208 |
| S1JM-WD | 210 |
| S1JN | 199 |
| S1JN4 | 200 |
| S1JN9 | 201 |
| S1JN9-L | 202 |
| S1JN9-LL | 202 |
| S1JO | 203 |
| S1JO4-OG | 204 |
| S1JO9-OG | 205 |
| S1JT9-SP | 211 |
| S1JT-SP | 210 |
| S1K | 155 |
| S1KG | 155 |
| S1KG9-OG | 155 |
| S1KH | 156 |
| S1KH9-OG | 156 |
| S1KT-SP | 157 |
| S1N | 227 |
| S1N9 | 227 |
| S1Q | 145 |
| S1QG | 146 |
| S1QG9-OG | 146 |
| S1QH | 147 |
| S1QH9-OG | 147 |
| S1QL | 148 |
| S1QN | 148 |
| S1QN4 | 149 |
| S1QN9 | 149 |
| S1QO | 150 |
| S1QO9-OG | 150 |
| S1QT9-SP | 151 |
| S1QT-SP | 151 |
| S1S | 159 |
| S1ST4-SP | 159 |
| S1ST9-SP | 160 |
| S1ST-SP | 159 |
| S1T9-SP | 186 |
| S1T-SP | 185 |
| S2B | 162 |
| S2B4 | 162 |
| S2B9 | 163 |
| S2BC-WDW | 117 |
| S2BD-WDW | 117 |
| S2BJ | 179 |
| S2BJ-WD | 180 |

| 型号 PART NO. | 页码 PAGE |
|-------------|---------|
| S2C4-W | 101 |
| S2C9-W | 101 |
| S2C-W | 100 |
| S2D4-W | 101 |
| S2D9-W | 101 |
| S2D-W | 100 |
| S2E9 | 142 |
| S2F | 216 |
| S2F9 | 216 |
| S2GC-W | 116 |
| S2GD-W | 116 |
| S2HC-W | 115 |
| S2HD-W | 115 |
| S2HJ | 212 |
| S2J | 192 |
| S2J9 | 193 |
| S2MC-WDW | 115 |
| S2MD-WDW | 115 |
| S2MJ-WD | 211 |
| S2NB | 181 |
| S2NB9 | 182 |
| S2NU | 231 |
| S2NU9 | 231 |
| S2OJ | 213 |
| S2Q9 | 152 |
| S2TB9-SP | 183 |
| S2TB-SP | 182 |
| S2TJ | 212 |
| S2WB | 173 |
| S2WC | 129 |
| S2WD | 129 |
| S2WE | 143 |
| S3B | 163 |
| S3C-W | 102 |
| S3D-W | 102 |
| S3J | 194 |
| S4B | 189 |
| S4BN | 190 |
| S4BN-WD | 190 |
| S4B-WD | 190 |
| S4C | 135 |
| S4D | 135 |
| S4E | 143 |
| S4F | 218 |
| S4G | 189 |
| S4H | 158 |
| S4J | 195 |
| S4K | 157 |
| S4L | 158 |
| S4MN-WD | 158 |
| S4N | 228 |
| S4O | 232 |
| S4Q | 152 |
| S4T-SP | 186 |
| S5B | 169 |

| 型号 PART NO. | 页码 PAGE |
|-------------|---------|
| S5BN | 170 |
| S5BT | 170 |
| S5B-WD | 169 |
| S5FLW9 | 236 |
| S5GB | 170 |
| S5GT | 186 |
| S5N | 229 |
| S5N9 | 229 |
| S5T9-SP | 187 |
| S5T-SP | 187 |
| S6B9-LN | 171 |
| S6B-LN | 171 |
| S6C9-LN | 100 |
| S6C-LN | 99 |
| S6D9-LN | 100 |
| S6D-LN | 99 |
| S6F9-LN | 219 |
| S6F-LN | 218 |
| S6J4-LN | 196 |
| S6J9-LN | 196 |
| S6J-LN | 196 |
| S6Q9-LN | 153 |
| S6Q-LN | 153 |
| S7B | 172 |
| S7B9 | 172 |
| S7N | 230 |
| S7N9 | 230 |
| S7T | 188 |
| S7T9 | 188 |
| S9B | 185 |
| S9C | 135 |
| S9D | 135 |
| S9E | 143 |
| S9F | 218 |
| S9J | 195 |
| S9J-CAP | 195 |
| SAB | 183 |
| SABBG-OG | 184 |
| SABGB-OG | 185 |
| SAC | 98 |
| SACCG-OG | 123 |
| SACCH-OG | 122 |
| SACCO-OG | 123 |
| SACGC-OG | 124 |
| SACHC-OG | 124 |
| SACOC-OG | 125 |
| SAD | 98 |
| SADDG-OG | 123 |
| SADDH-OG | 122 |
| SADDO-OG | 123 |
| SADGD-OG | 124 |
| SADHD-OG | 124 |
| SADOD-OG | 125 |
| SAE | 144 |
| SAF | 217 |

| 型号 PART NO. | 页码 PAGE |
|-------------|---------|
| SAF6FF-LN | 226 |
| SAFFG-OG | 226 |
| SAFFH-OG | 224 |
| SAFFO-OG | 225 |
| SAFOF-OG | 225 |
| SAJ | 193 |
| SAJ6JJ-LN | 213 |
| SAJJ6J-LN | 214 |
| SAJJO-OG | 214 |
| SAJOJ-OG | 214 |
| SAK | 157 |
| SAN | 228 |
| SAQ | 154 |
| SAQHQ-OG | 154 |
| SAQQH-OG | 154 |
| SBB | 184 |
| SBC-W | 102 |
| SBD-W | 102 |
| SBE | 144 |
| SBF | 217 |
| SBJ | 194 |